SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1906, by Munn & Co.]

Vol. XCIV.—No. 22.
ESTABLISHED 1845.

NEW YORK, JUNE 2, 1906.

10 CENTS A COPY
$3.00 A YEAR.

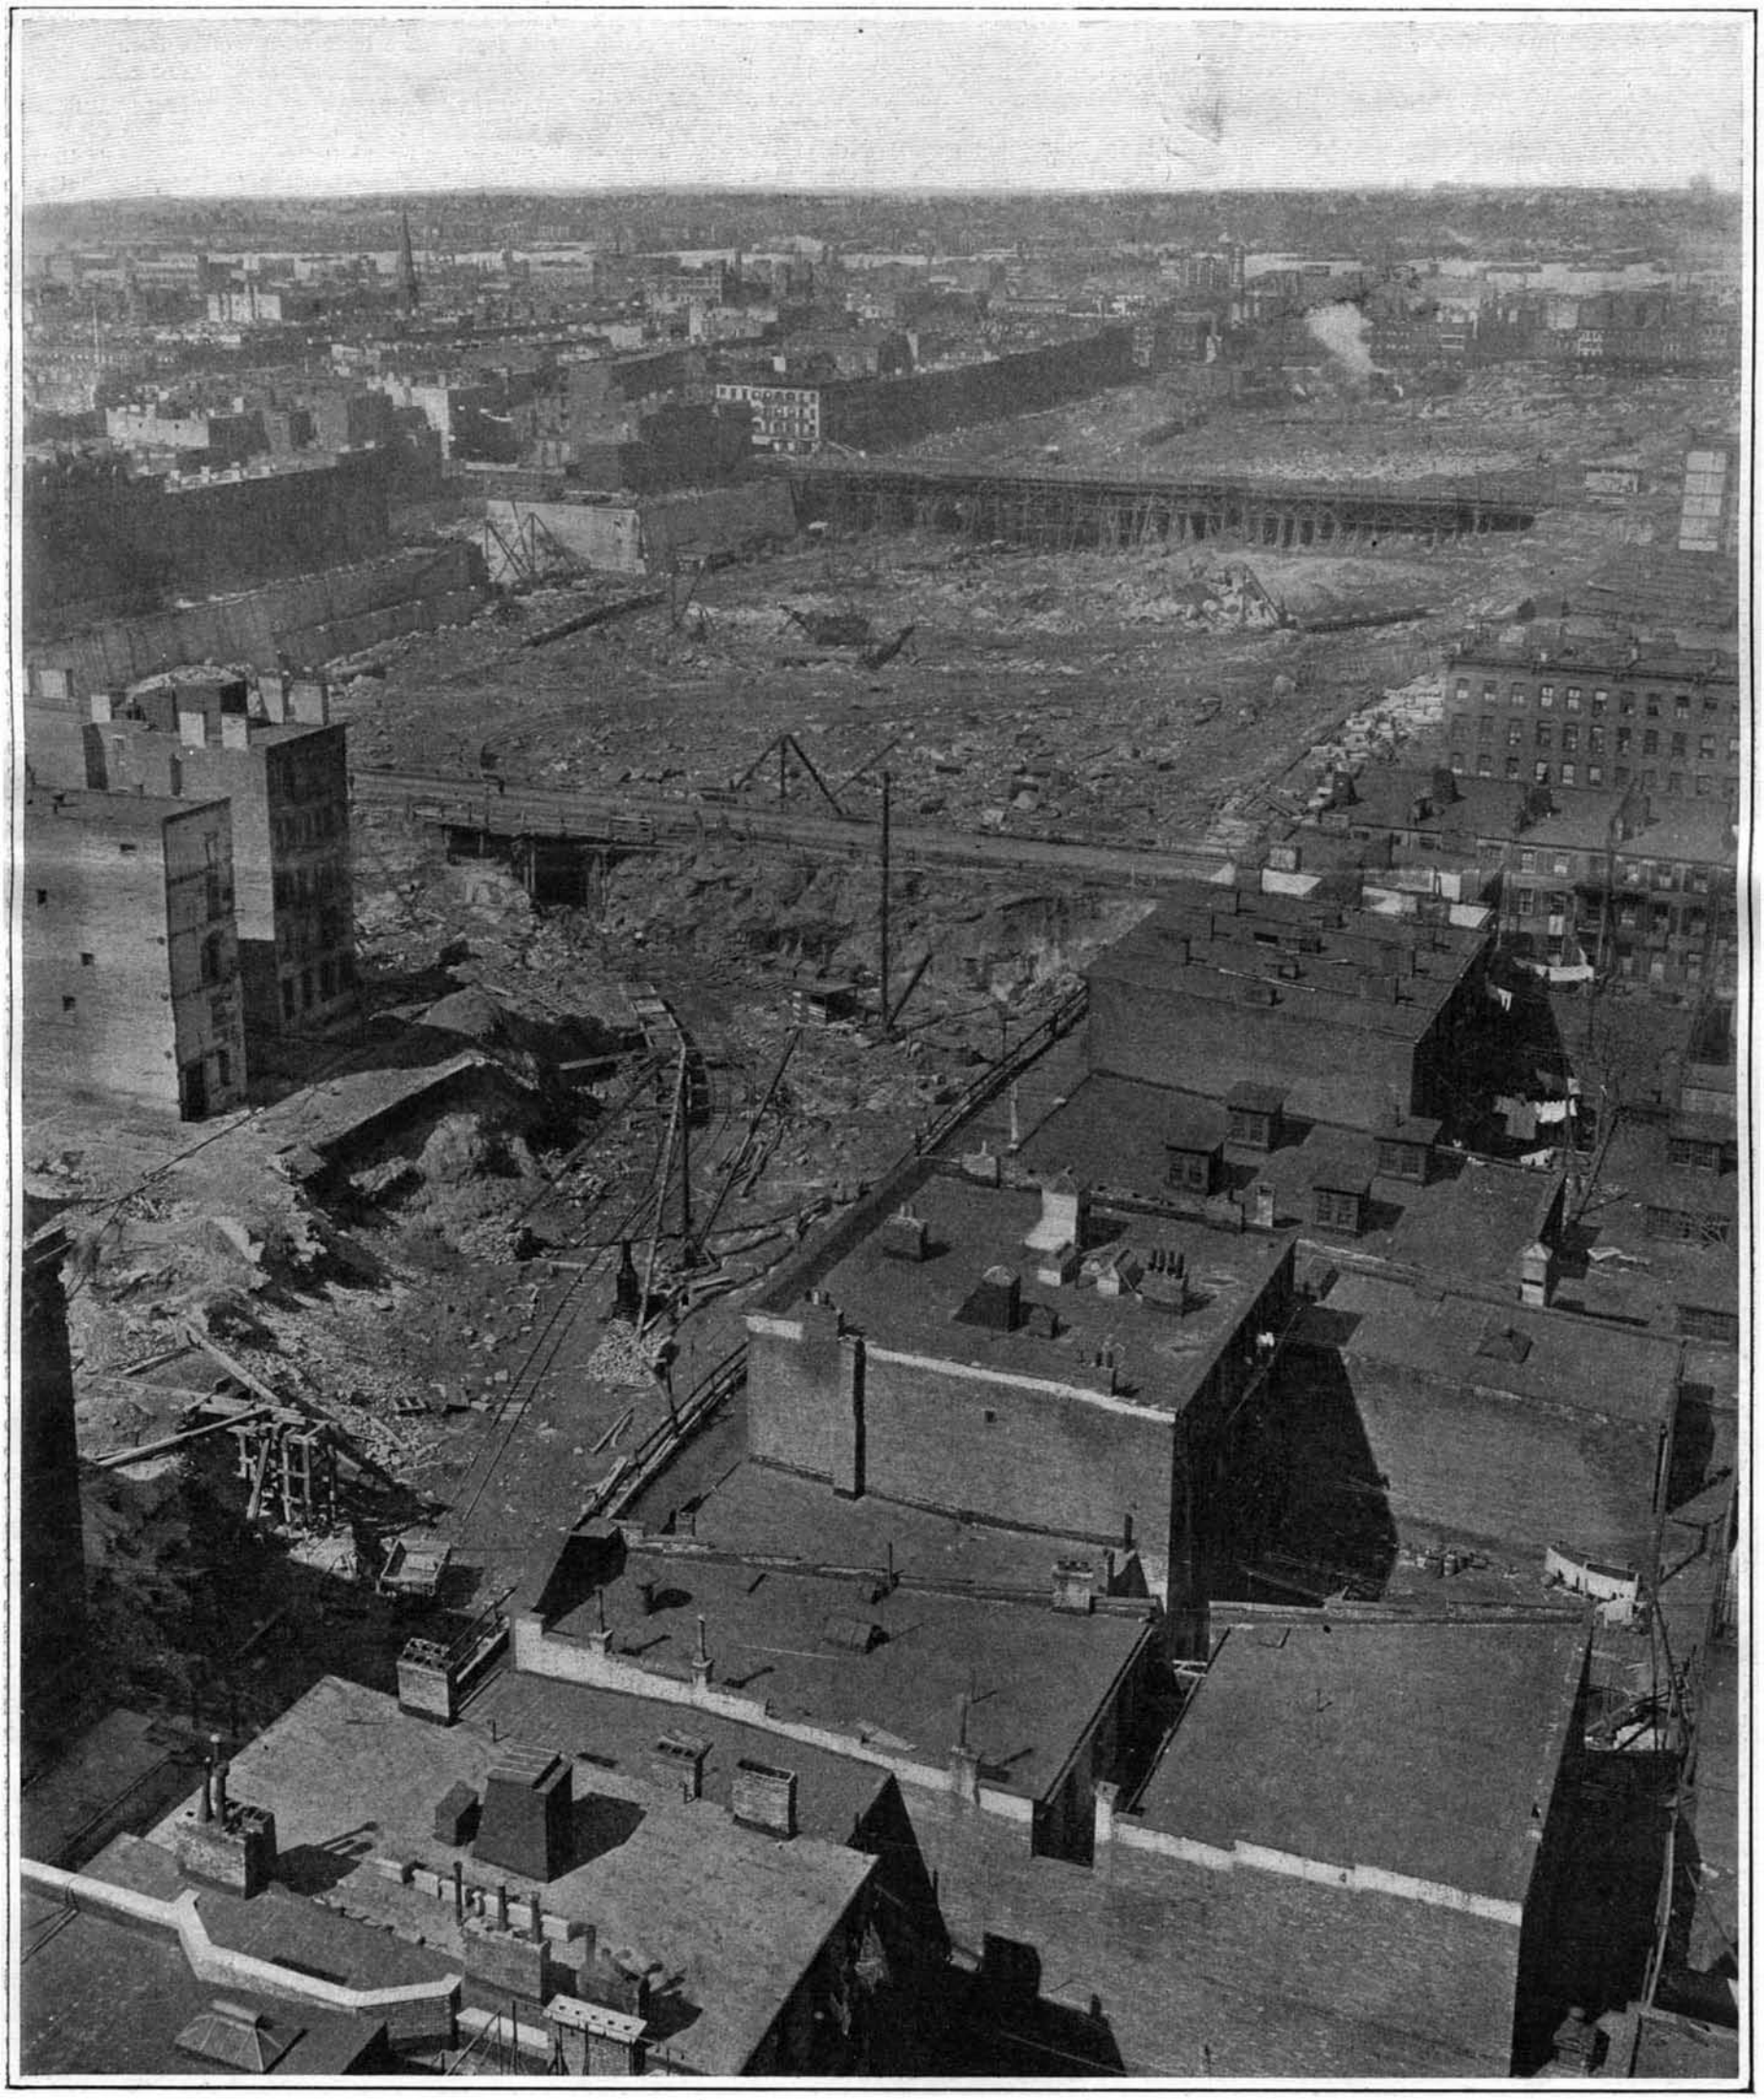

Bird's Eye View, Showing the Vast Area, 2,050 Feet by 500 Feet, Which is Being Excavated to a Depth of 50 Feet, Necessitating the Removal of 2,000,000 Cubic Yards of Material.

ACRES OF VALUABLE LAND IN THE HEART OF NEW YORK CITY LAID WASTE FOR THE NEW PENNSYLVANIA RAILROAD STATION.—[See page 453.]

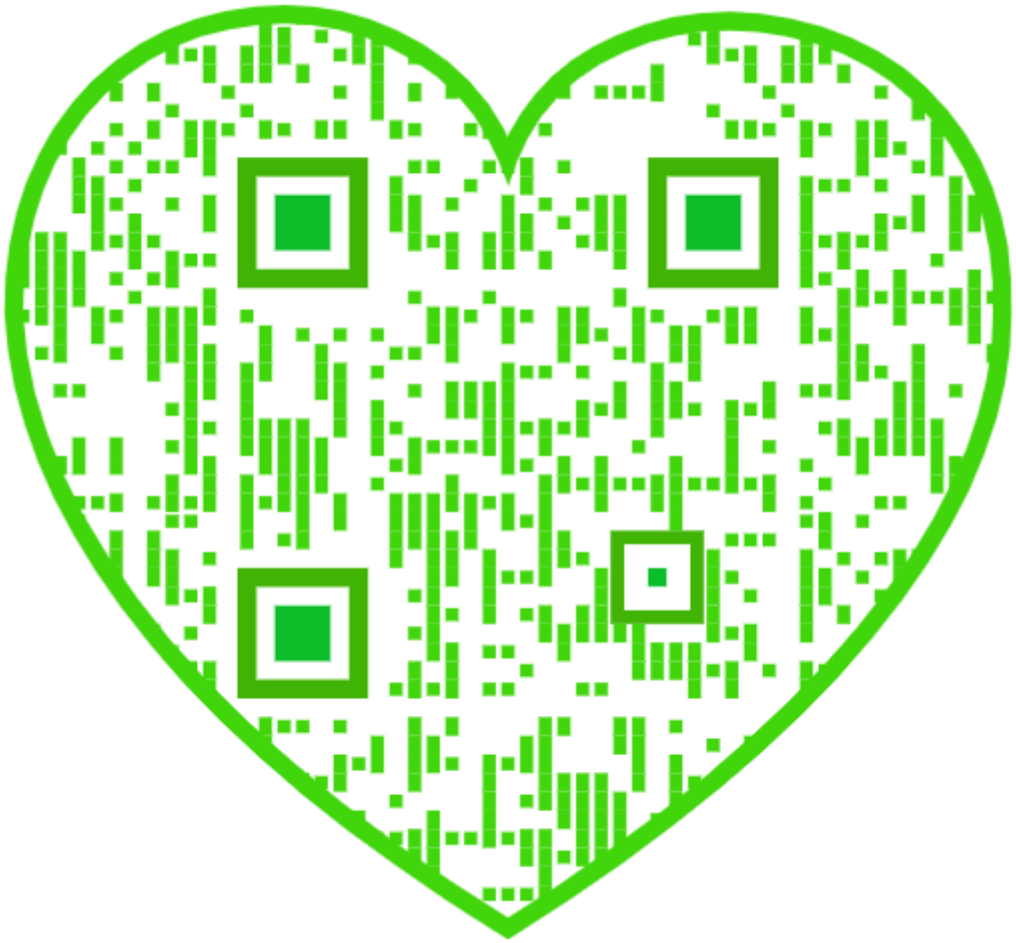

SCIENTIFIC AMERICAN
ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at
No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845) ..... $3.00 a year
Scientific American Supplement (Established 1876) ..... 5.00 "
American Homes and Gardens ..... 3.00 "
Scientific American Export Edition (Established 1878) ..... 5.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, JUNE 2, 1906.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receivespecial attention. Accepted articles will be paid for at regular space rates.

THE RAPID TRANSIT EAST RIVER TUNNEL DEFECTS.

In accordance with a resolution of the Rapid Transit Board at its last meeting, when the Mayor suggested that there had been a lack of publicity in respect of the defects in the East River Rapid Transit tunnel, the chief engineer, Mr. George S. Rice, has presented a report which fully explains the conditions on this important piece of work.

It seems that there was no serious trouble in driving the tunnel and maintaining the correct grade, until the shield had passed below the water level of the East River, when water was encountered in considerable quantities, and the shield began to settle below the established grade. The settlement was immediately detected by the Rapid Transit engineers, reported to the chief, and by him was reported to the Board, and from that date to the present, the conditions in the tunnel have been regularly made known at successive Board meetings.

The cause of the trouble was the failure of the subcontractor to maintain sufficient air pressure at the shield to keep out water, and so preserve the ground through which the shield was being driven in a proper condition to support the weight of the shield, amounting to about 50 tons. Instead of maintaining the pressure sufficiently high to keep the shield free of water, which might have been done by increasing the supply of air, or by the use of special devices intended to diminish the loss of air, the contractor preferred to keep down the excess of water in the shield by pumping.

In other words, instead of preventing the water from flowing into the shield, he preferred to let a certain amount of flow take place, and remove the water by running a suction hose to the bottom of the forward edge of the shield and pumping it out through the tunnel. Now, while this method was successful in keeping the water down, it had this unfortunate effect, that the water, flowing around the under sides of the shield toward the suction hose, washed along with it the underlying sand, causing a cavity beneath the shield. This produced the condition that the shield and a certain amount of the forward end of the tunnel were pressed down by the heavy load of sand and water above it, while there was no corresponding sand to support the overhanging structure from beneath. This brought a heavy vertical bending strain upon the forward end of the shield and tunnel lining, causing it to settle gradually even when it was not being advanced. The bending strain also cracked the plates, and resulted in those depressions in the line of the tunnel which must now be remedied.

It was realized that it would be possible to rectify these errors of grade subsequently while the rest of the tunnel was being constructed, and this reconstruction is now being carried out on a length of 1,800 feet in the north tube and 700 feet in the south tube. This reconstruction involves the lowering of the track or the replacing of plates in the bottom or top of the tube, according to the conditions. These repairs will be completed by the time the river headings are driven to a connection, which will probably occur during next November.

The Brooklyn tunnel is being driven through a glacial drift consisting of sand mixed with bowlders, and some gravel. The public may be perfectly satisfied as to the permanent stability of the tunnel. The report states that the material which the engineers have encountered under the river is such that when the tunnel is completed, it can be absolutely relied upon to stay in place.

PRESENT CONDITIONS AT PANAMA.

The chairman of the Isthmian Canal Commission, at the close of his last report giving a summary of the work that has been done on the canal, states that the carrying through of this great work divides itself into two parts—first, that of thorough preparation; and second, that of actual construction; and he says with great truth that the former is the more important and more difficult of the two. Like many of the colossal tasks involving the movement, sustenance and control of large bodies of men in climates to which they are unsuited and unaccustomed, this enterprise has suffered from a reversal of the proper order of procedure as stated above. In the desire to "make the dirt fly," actual construction was begun before adequate preparation had been made. Men from northern climes were sent into a fever-laden district, where there was no provision to adequately house and feed or employ them, to say nothing of the lack of those hygienic safeguards which are indispensable, if the white man from more temperate zones is to live and work in a tropical region.

The policy inaugurated by the chairman in the late summer of 1905 included the closing down of the work of excavation, except so far as it was necessary to put the cuts in condition for the installation of the maximum number of steam shovels that could be economically employed, and the direction of the energies of the force to that general work of preparation which should have antedated any serious attempt at construction. The work of preparation has included the creation of an effective working organization; the sanitation of the Isthmus; the provision of suitable quarters and food for employees; the construction of proper terminal, yard, and railway track facilities, and intermediate yards suitably disposed along the line of the canal for the handling of the vast quantities of supplies and material; the installation of a system of parallel working tracks laid through the cuts; and finally, the working out of all engineering problems and formulation of a comprehensive plan for carrying forward the work in each department.

The health conditions on the Isthmus are to-day most satisfactory. Although there are 23,000 employes on the payrolls, there are fewer patients in hospitals than for many months past, 450 beds being vacant. There has been no authentic case of yellow fever since last November. Mosquitoes are so scarce that many people sleep in unscreened houses. Indeed, Dr. Gorgas considers that he has the health situation so well in hand, that no epidemic can arise within the canal zone.

In regard to food and quarters for employes, we learn that the building department has not only provided ample quarters for the existing force, but has at the present time a sufficient reserve to accommodate 3,000 additional laborers. An interesting side light is thrown upon the character of the native laborers in the canal zone by the fact that although mess kitchens have been created at the different labor camps where wholesome and nourishing meals may be obtained at the cost of ten cents each, the laborers did not avail themselves of the privilege, except in small numbers. This was due, not to a desire to save, but to indulge in food unsuited to their physical needs, and to gratify their desire for drink and other indulgences. To meet this condition the chief engineer was authorized to insert in all future labor contracts a proviso, whereby the employe agrees to permit a fixed amount to be deducted from his daily wage, in consideration of which he is to receive three wholesome and nourishing meals per day. With regard to the food supply of American employes, we learn that modern refrigerator cars are now running on the Panama Railroad; that there is a cold-storage plant in operation at Colon, and that refrigerating plants have been installed on two of the steamers running between New York and Colon. A continuous line of refrigeration, therefore, exists between all points in the United States and the various districts within the canal zone. The first consignments of American meats and vegetables have been successfully distributed along the canal.

Another preparatory work which is nearing completion is the creation along the line of the canal of proper yard and track facilities for receiving and distributing the vast amounts of supplies needed for the canal, and to provide for the disposal of the millions of cubic yards of excavated material, as it is brought out from the cuts. The large terminal yard at Cristobal is nearly completed, as are the machine and erecting shops, coaling stations, turntable, etc., while the receiving and forwarding yards at Bas Obispo and Pedro Miguel, on each side of the Culebra cut, which will receive the dirt trains as they come down from the levels of Culebra cut, are well under way. Several miles of the double-tracking of the Panama Railroad main line have been completed, and the grading for more of it is well advanced.

The great Culebra cut has been put in shape for the approaching wet season, with a view to the installation of the largest possible number of steam shovels. All the barriers left across the cut by the French have been removed; tracks have been laid and ballasted on each level of the cut, and a well-ballasted, double-track line has been built through the bottom of the canal prism. The chief engineer believes that by July or August he will have forty steam shovels installed and will be removing about 1,000,000 cubic yards per month. The actual cost of excavation during March was 53½ cents a cubic yard.

Finally, and by no means least important, is the announcement by the chairman of the Canal Commission that law and order continue to be maintained to a degree that would be remarkable under any conditions, and is especially so when the character of the population of the zone is considered; for its vast army of 23,000 employes has been gathered from all parts of the world. Under the administration of the Canal Zone Governor, the police force is so vigilant and so efficient that good order is steadily maintained, serious crime is almost unknown, and arrests are mainly for petty offenses and violations of the sanitary laws.

As matters now stand there is an urgent call from the Isthmus for an early decision as to the type of canal to be built, the preparatory work having reached the stage at which, if a plan of construction be not quickly decided upon, a large part of the engineering and constructive force must remain idle.

RECENT EXPERIMENTS IN THE PRESERVATION OF MEAT.

In a report by the Italian Minister of Agriculture on the subject of refrigerating in Italy, Mancini gives some interesting results obtained by the Craveri process for preserving meat, a process which was much discussed some months ago, but of which a more definite idea can now be formed, since a series of experiments has been conducted under the direction of a number of university professors.

The Craveri method would seem to have solved the problem hitherto unsolved—of preserving meat in a form fit to be eaten, by means of chemical treatment. Excluding for hygienic reasons ordinary antiseptics, and recognizing as insufficient for practical purposes the usual method of salting, Craveri resorts to injections into the veins of slaughtered animals, from which the blood has been drained, of a solution of 100 parts of water, 25 of kitchen salt, and 4 of acetic acid; in other words, of a solution of a mixture of substances such as are found normally in our bodies, and which form part of our nourishment. The solution is injected to the amount of one-tenth of the weight of the living animal. Prof. Brusaferro, of Turin, experimented upon two animals, a sheep and a calf; the two carcasses were hung in a subterranean room for 75 days, at a temperature of 16 deg. C. (about 61 deg. F.). After this time they were skinned, dressed, and cut up. The heart, brains, liver, and intestines seemed somewhat macerated, but were normal in appearance. The fat beneath the skin was perfectly preserved, the flesh appearing bright red in color, moist, and giving out an agreeable, slightly acid odor. In no part was there any trace of putrefaction, even incipient. This meat boiled produced an excellent broth, resembling in every particular that obtained from fresh meat. Roasted it was tender, and even tasted better than ordinary meat, was digestible and nutritious. As a result of these and other experiments, Prof. Brusaferro declares it as his opinion that the Craveri method promises great advantages over others. The other professors engaged in the experiments came to exactly the same conclusions. Submitted to a bacteriological examination, the meat proved to be free from bacteria; in the long period of preservation given, the beginning of dissolution was noticed in the visceral and muscular tissues, but without the production of any toxic principle whatever.

DENATURED ALCOHOL FREED FROM TAXATION.

On May 24 the Senate passed by a unanimous vote the bill which provides for the freeing from taxation after January 1, 1907, of denatured alcohol used for industrial purposes. The bill had previously been passed by the House, where it was opposed chiefly by the manufacturers of wood alcohol. This substance is to be used as an adulterant, however, to make the alcohol unfit for drinking. According to the provisions of the new law, the adulterating or denaturizing of the alcohol is to be done in the various factories under the supervision of an internal revenue officer.

By removing the tax from industrial alcohol our government has effectually put a stop to the domination of the oil trust over the use of liquid fuel for light, heat, and power. In Germany and France devices for using denatured alcohol for these purposes have already been perfected and placed in actual use, and their adoption in this country will no doubt come quickly as soon as industrial alcohol is on the market. As this fuel can be produced from many vegetable products that have heretofore gone to waste, and that, too, at a considerably lower price than is obtained for gasoline and kerosene to-day, there need never be any fear of lack of fuel, even should the coal measures all become exhausted and the supply of natural oil cease.

The new fuel, besides being cleaner and less volatile, will, when used in suitably-designed internal-combustion motors, develop about as much power per gallon as will the old, while for light and heat it is far superior. Its introduction will create a new market for the farmers of our country, while they will benefit directly from it also by using it themselves for the production of light and power.

THE HEAVENS IN JUNE.

BY HENRY NORRIS RUSSELL, PH.D.

Our map shows the sky as it appears in the early evening, just after dark. The brightest star in sight is Arcturus, which is due south, and very high up. About it lie the other stars of Boötes, the Herdsman, which can be easily picked out with the aid of the map. The star Epsilon (ε) is a fine double, which can be well seen with a three-inch telescope.

Below this is Virgo, with one bright star, Spica, which is nominally of the first magnitude, though much fainter than Arcturus. The five stars which lie above and to the right of Spica also belong to the constellation. Below them are the groups of the Cup and the Crow, which are both on the back of the great Sea Serpent (Hydra). Due west, and pretty well up, is the Lion (Leo). The star α in this constellation is of the first magnitude, and bears the name of Regulus. The neighboring star γ is a fine telescopic double.

The Great Bear fills the upper part of the northwestern sky. Below it are Gemini and Auriga, both setting. Inside the curve of the dipper handle are the Hunting Dogs, with which the Herdsman is supposed to be pursuing the Great Bear. They have only one prominent star between them, which is worth a telescopic glimpse, as it is double. South of them lies the constellation of Berenice's Hair, a tangle of faint stars.

Below Virgo, on the left, is Libra, the Scales, which boasts only two bright stars. The southern one of the two is a wide double, interesting in a field glass. Farther southeast is Scorpio, the finest of the twelve zodiacal constellations, though so far south that we never see it to the best advantage. Its principal star, Antares, is one of the reddest in the sky, and is a very interesting telescopic object, both on account of its color and because it has a faint companion, of a vivid green hue, which intensifies the red by contrast.

β Scorpii is also a fine telescopic double, while μ can be seen double by the naked eye, when the air is clear enough to give us a good look at it.

Due south, below Virgo, we may see parts of the southern constellations of the Centaur and the Wolf. The former has two very bright stars, but they cannot be seen at all from points north of New Orleans.

In the southeast is the intricate mass of Ophiuchus, the Serpent Bearer, and Serpens, the serpent which he carries. Higher up, and almost due east, is the semi-circle of the Northern Crown, below which is Hercules. This is a large constellation containing several interesting telescopic objects. The star α is a fine double, the brighter star being red, and its companion blue. The principal component is variable in brightness, and has a superb banded spectrum, which may be easily seen by placing a prism in front of the eyepiece of the telescope. δ Herculis is also double, but the most interesting object in the constellation is the great star cluster which lies between the stars η and ζ, nearer the former. This is faintly visible to the naked eye, and easily in a field glass, appearing as a hazy spot of light, near which lie two small stars. Moderate telescopic power splits up the spot into hundreds of faint stars, while great telescopes show many thousands of them.

Below Hercules in the east is Aquila, the Eagle, just rising, and farther north are Cygnus, the Swan, with the Lyre above it, marked by the great white star Vega. Farther to the left are the circumpolar constellations—Draco and Ursa Minor above the Pole, and Cepheus and Cassiopeia below it.

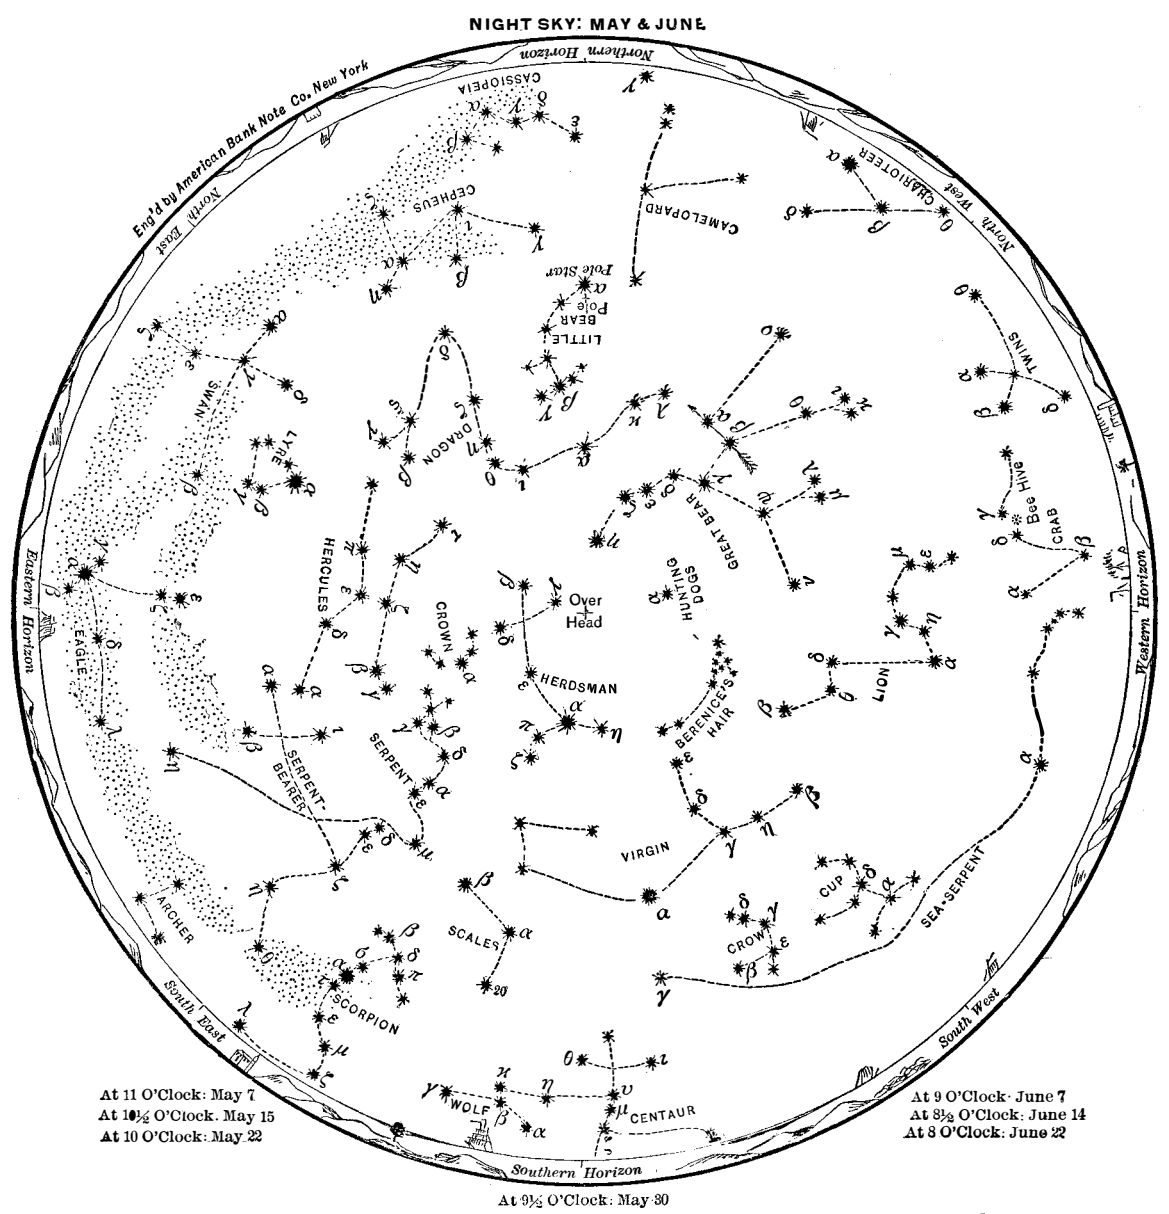

In the map, stars of the first magnitude are eight-pointed; second magnitude, six-pointed; third magnitude, five-pointed; fourth magnitude (a few), four pointed; fifth magnitude (very few), three-pointed, counting the points only as shown in the solid outline, without the intermediate lines signifying star rays.

THE PLANETS.

Mercury is morning star until the 8th, when he passes back of the sun and becomes an evening star. He is visible only during the last ten days of the month, when he may be seen in the evening twilight, as he sets more than an hour later than the sun.

Venus is evening star in Gemini and Cancer, and is very conspicuous, remaining in sight till about 9:30 P.M. Mars is also in Gemini, nearer the sun than Venus, and is hardly observable, as he sets at 8 P. M.

Jupiter is in conjunction with the sun on the 10th, and is invisible throughout the month.

Saturn is morning star in Aquarius, and rises near midnight on the 15th, so that he is observable in the early morning.

Uranus alone of all the planets is well placed for observation this month. He comes to opposition on the 28th, and is then in Sagittarius in R. A. 18h. 28m. 30s. and declination 23 deg. 36 min. south. He is moving slowly southwestward, at the rate of 10s. in R. A. and 7 sec. in declination per day.

Neptune is in Gemini, too near the sun to be observed.

THE MOON.

Full moon occurs at 4 P. M. on June 6, last quarter at 2 P. M. on the 13th, new moon at 6 P. M. on the 21st, and first quarter at 9 A. M. on the 29th. The moon is nearest us on the 6th, and farthest away on the 18th. She is in conjunction with Uranus on the 8th, Saturn on the 13th, Jupiter on the 21st, Mars and Neptune on the 22d, Mercury on the 23d, and Venus on the 24th. None of these conjunctions is close. At 3 P. M. on the 22d the sun reaches his greatest northern declination, and enters the sign of Cancer, and in the old almanac phrase, "summer commences."

Princeton, May 17, 1906.

A NEW COMPOUND.

Continuing his researches upon the iodo-mercurates of the alkaline earth metals, M. A. Duboin, of Paris, after forming compounds with calcium and strontium, now succeeds in preparing the iodo-mercurate of barium and observing its properties. It has the form of a saturated solution, and this solution was previously obtained by Rohrbach, who found it to be remarkable as one of the densest bodies known, having a density of 3.56. Duboin determined the composition of this body, which contains barium, 12 parts, mercury 23.40 parts and iodine 52.16 parts per 100. This corresponds to the formula BaI_2, $1.33HgI_2$, $7.76H_2O$. It is a mixture of two iodides which are soluble in 96 per cent alcohol. The saturated solution has a density of 2.76 at 23.5 deg. C. When this liquid is saturated with bioxide of mercury at 70 deg. C., upon cooling it deposits oxide of mercury and also small crystals having the formula BaI_2, $5HgI_2$, $8H_2O$. These crystals resemble the corresponding salts of calcium and strontium, but they are more easily decomposed and become red after a time, even in sealed tubes. M. Duboin obtained another definite hydrate by keeping a liquid containing barium 11.67, mercury 22.41, iodine 49.59 at a temperature of —9 deg. This liquid has the formula BaI_2 $1.30HgI_2$, $10.41H_2O$. The hydrate that he thus obtains appears in the form of an agglomeration of large four-sided prismatic crystals. The formula for this body is $2BaI_2$, $3HgI_2$, $16H_2O$. Its density at 0 deg. C. is about 4.0. The crystals melt when the temperature rises. Another salt is obtained by the evaporation of a solution containing barium 13.95, mercury 19.16, iodine 50.22, or HgI_2, $1.07BaI_2$, $9.71H_2O$. When this liquid is evaporated under a bell-jar in presence of sulphuric acid, it deposits prismatic crystals which are very deliquescent. Their density at 0 deg. C. is about 4.06 and they have the formula $3BaI_2$, $5HgI_2$, $21H_2O$. Corresponding to this salt we have the iodo-mercurates of magnesium and manganese.

A UNIQUE VACUUM APPARATUS.

In a paper lately presented to the Académie des Sciences, Messrs. Georges Claude and R. J. Lévy describe an apparatus which is designed to utilize the property of carbon remarked by Dewar for producing a vacuum. This property consists in the strong absorption of gases by carbon when at the temperature of liquid air. The vacuum is made in several stages. A partial vacuum is obtained with an air-pump in the desired vessel and in one or more vessels containing carbon. The pump is then disconnected and one of the vessels plunged in liquid air. We thus form a new vacuum upon the partial vacuum already obtained in the carbon vessels and in the vessel in which we need the vacuum. The carbon vessel is then cut off and a second vessel is plunged in liquid air. It makes a still better vacuum on the main chamber and the remaining carbon chambers. We then cut it off and replace it by a third chamber, and so on. In practice, two carbon chambers are enough to obtain the highest vacua. The apparatus must be of simple design and arranged so that we may insert or cut out the successive chambers with the necessary rapidity and tightness which are indispensable for the very high degrees of vacuum obtained. The present apparatus is so combined that the operation of inserting or cutting out the chambers from the main vacuum chamber is carried out by mercury columns worked by piston plungers or by atmospheric pressure. The tops of the mercury columns are cooled by liquid air so as to eliminate the tension of the mercury vapor, which is a hindrance for the operations and for the perfection of the vacuum. As an example of the rapidity of absorption of the gases by the carbon we may mention that the experimenters, starting from an initial pressure of 2 millimeters of mercury, were able to arrive in 15 minutes to the extinction point for fine Crookes tubes of 80 cubic inches capacity which were exhausted at the same time.

LECTURE-ROOM BOOMERANG.

L. Pfaundler's paper on "Boomerang for the Lecture-room," which is printed in Akad. Wiss., gives the following information:

Small boomerangs of various shapes, and 6 to 10 centimeters long, are cut from aluminium foil 0.5 millimeter thick, and hammered convex on one side. These are placed on a small table so that the concave edge is to the front, and one end projects over the side of the table almost on a level with the top of a flat, vertical steel spring used for propelling the boomerang by hitting the projecting end. The boomerang shoots forward and upward for a distance of 5 to 6 meters, and then returns almost to the starting-point. The boomerang is gradually deformed by the repeated percussion of the spring.

THE BRIERLEY FOG-SIGNALING APPARATUS FOR RAILROADS.

BY THE ENGLISH CORRESPONDENT OF THE SCIENTIFIC AMERICAN.

Railroad engineers in Great Britain are following with great interest the experiments that are being carried out upon the Great Northern Railroad with a new signaling apparatus for operation in foggy weather. The system now used on this British railroad has been in service for the past three years, though its devices have been preserved a secret until their utility and certain action was conclusively demonstrated. The invention of Mr. Wynford Brierley, an experienced railroad engineer, who is consequently fully cognizant of the various problems that have to be surmounted in devising such an apparatus, the system is so designed that a failure would be sufficient to arouse the locomotive engineer's suspicions and cause him to come to a stop as soon as possible.

The Brierley apparatus is extremely simple, both in design and operation, and comprises a minimum of integral moving parts. The general character of the invention is plainly shown in the accompanying illustrations. Beside the track and close to the rails is a rocking arm carrying on either end a heavy head. The axis of this rocker is connected at one end with a lever, to which is attached the cable operating in communication with the semaphore with which the apparatus acts. The movement of the side lever, owing to its rigid fixation on the rocker, raises the one or the other of the two weighted ends to a horizontal position, according to the setting of the semaphore arm. When the latter is set to danger the weight nearest the track is horizontal—its normal position. The signalman in the cabin, when he lowers the semaphore arm, at the same time actuates the rocking arm of the apparatus, since a single cable operates both, and the weight at the opposite end is swung up to the horizontal, the other weight being naturally lowered out of the way.

On the engine is a small box from which extend two vertical triggers one behind the other as shown in the illustration. As the locomotive passes the apparatus on the track, one or other of these triggers according to the setting of the semaphore strikes the rocker, is forced backward, and at the same time rings a gong on the engine. This gong has an indicator the dial of which placed in the cab shows whether the road is clear or otherwise, and the engineer is able to act accordingly. When the trigger has passed over the rocker it returns instantly to its former position.

The mechanism on the engine is carried out upon novel and ingenious lines, especially that part which acts with the trigger and serves to return it to the vertical position after passing the rocker contact. Upon the horizontal shaft carrying the trigger is fixed a new type of coiled spring. There are two coils placed opposite one another, i.e., one has a left-hand coil and the other a right-hand coil. These are keyed to the axial shaft so as to become an integral part and

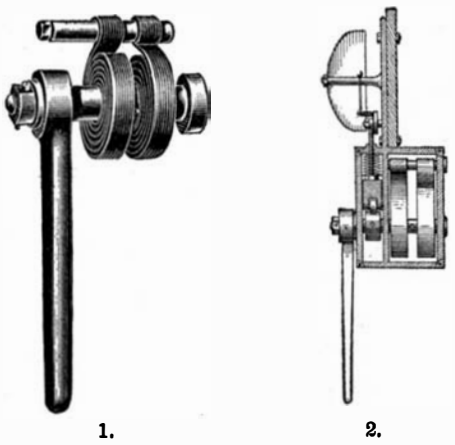

1. 2.

Fig. 1.—Double coiled spring fitted on lever stud showing trigger fitted on engine. Fig. 2.—Side section view of box showing general arrangement with gong actuated by oscillations of trigger after passing over contact, and reverse coiled spring.

The Brierley Fog-Signaling Apparatus.

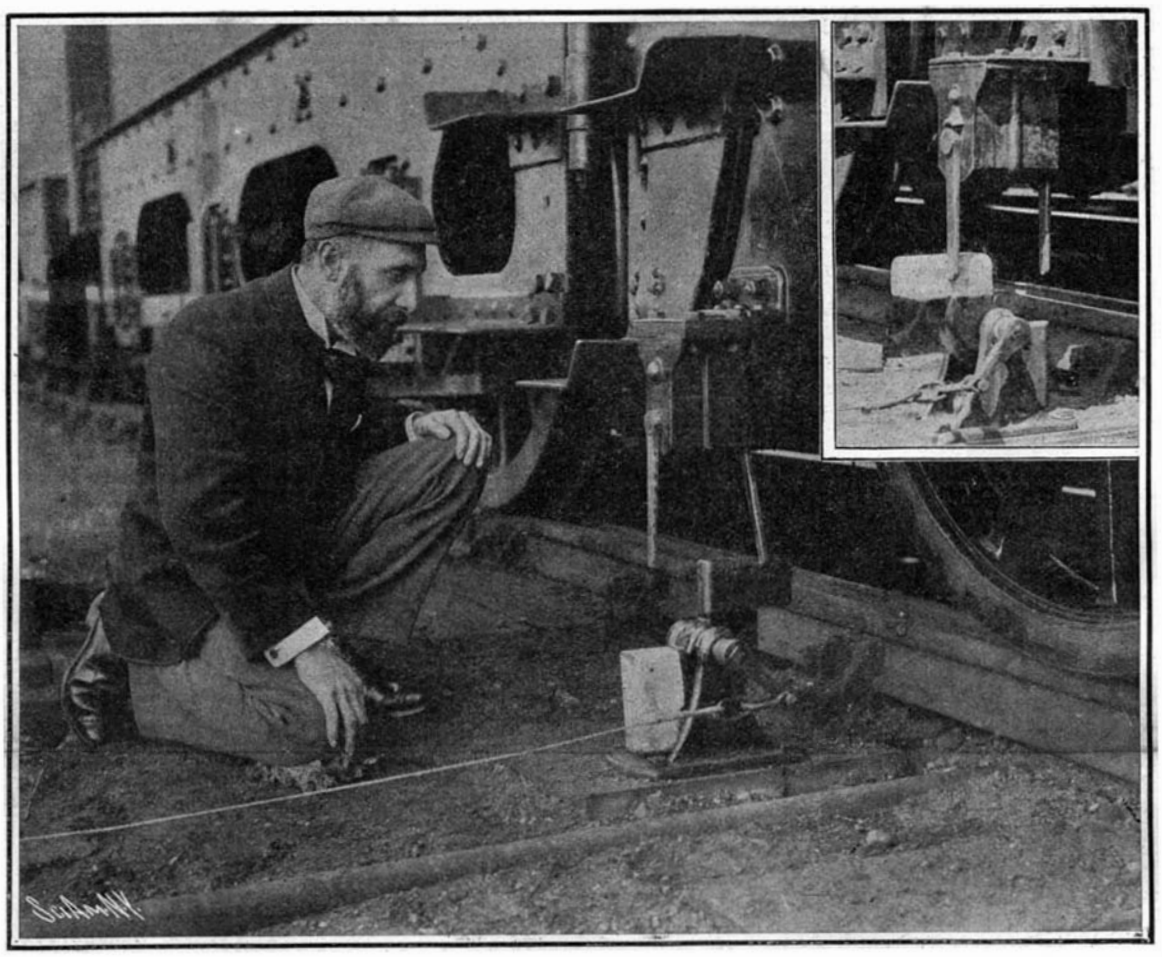

The Large View Pictures the Rocker When the Semaphore is at Danger, Showing the Danger Trigger Passing Over and Making the Contact Which Rings the Bell in the Engine Cab. The Small View Shows the Contact for Signaling "Road Clear."

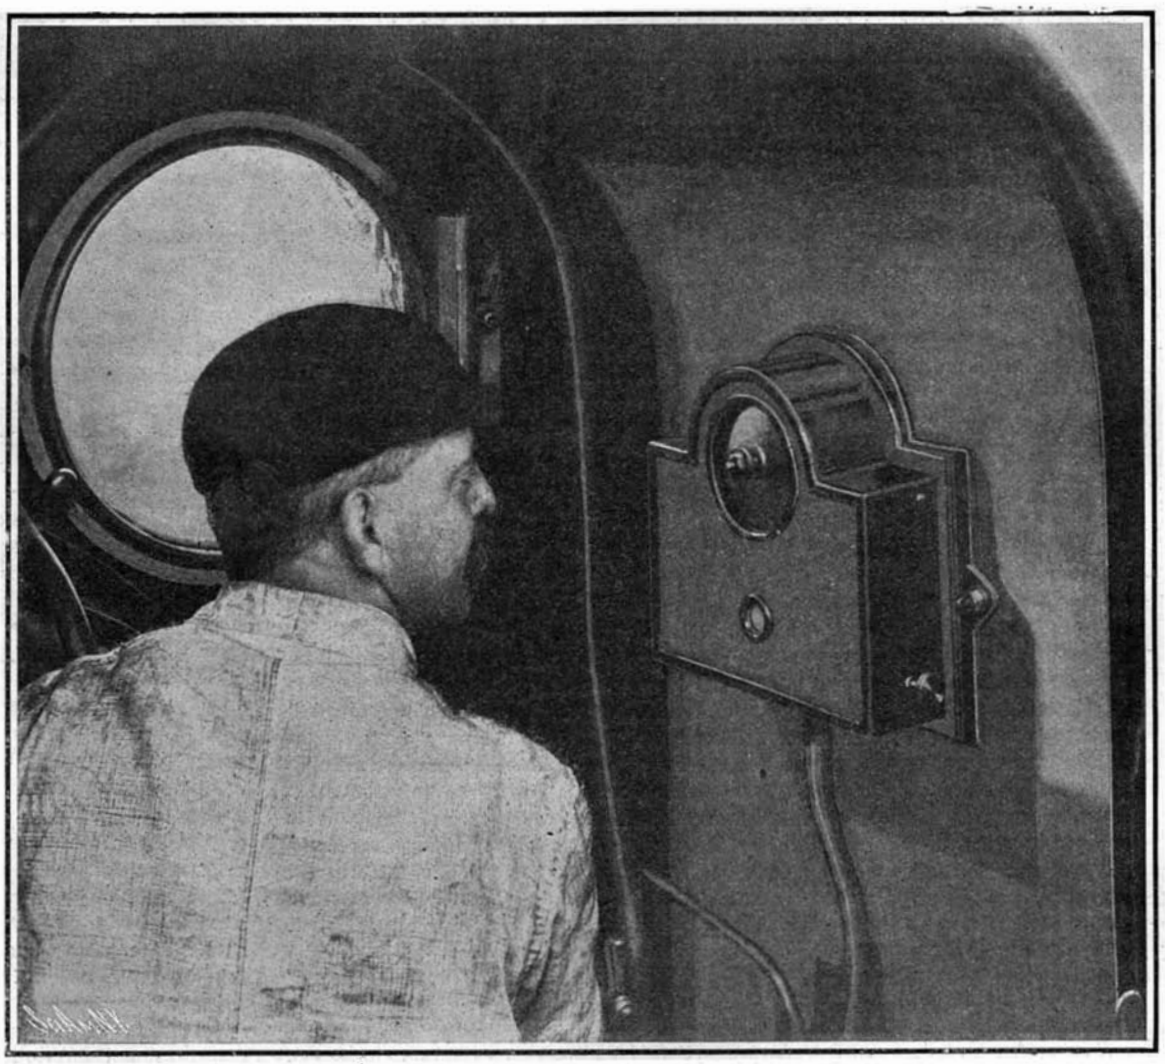

The Indicator and Bell in the Engine Cab Show the Position of the Semaphore Arm.

THE BRIERLEY FOG-SIGNALING APPARATUS FOR RAILROADS.

are of great strength and ease. In passing over the rocker contact, the trigger is forced backward until its angle is sufficient to ride over the obstacle. In so doing one spring is necessarily uncoiled, but simultaneously the other spring is coiled tighter. Consequently the moment the trigger has passed over the contact the trigger is brought sharply back to the normal vertical position, mainly by the action of the part of the spring which has been coiled tightly. This ingenious arrangement enables the apparatus to work equally well when the engine returns over the same road, the reverse action of the springs taking place. The value of this device is that the trigger is always brought back to the dead center, not violently, but slightly oscillating. If only a single coil spring were used, continual action of the trigger in one direction would tend to release the tension of the spring, so that the trigger would not always return to the dead center, and in a short time the spring would be so weakened that the trigger would not touch the contact at all. By using a reverse coil such as this, positive action under all and varying circumstances is insured, and the trigger is always brought to the same normal point. At the same time the mechanism constitutes an efficient cushion for absorbing the tremendous shock of the impact that results when the trigger strikes the contact when the train is traveling at express speed. The majority of such mechanical devices have failed at this point. The terrific force with which the moving part has been brought into contact with the stationary section breaks the apparatus. Three years' constant use upon the Great Northern Railroad, however, has shown that with the Brierley apparatus no such apprehensions need be entertained. The apparatus is placed on the section of the track where both north and south-bound trains pass, and even with trains traveling at 80 miles per hour no failure of action has yet been recorded, nor has the apparatus shown any signs of breaking under the enormous strains imposed upon it.

In the first type of apparatus the inventor relied upon electrical connections between the rocker and the trigger to ring the gong, but he has since simplified the invention, and arranged for this operation to be carried out mechanically. Not that the electrical system proved unreliable, but purely in the interests of the locomotive engineers. It was found that in the event of the electric bell failing through a broken or loosened connection or expended batteries the engineer was not possessed of sufficient electrical knowledge to locate the fault and remedy the defect. On the other hand, with a mechanical appliance, in the event of the gong not ringing he is able to more readily and easily ascertain the cause and unless there is a broken part, to set it right on the engine. The gong in this instance is wound up with a spring in the same manner as an alarm clock and is held thus by a catch. When the trigger makes contact, this catch is released by a cam and the bell set ringing, continuing until the driver either stops it, or it

has run down. Both types have been in use upon the railroad in Great Britain with equal success, though the mechanical form is considered the most suitable to ordinary working.

The gong can be carried on any part of the engine though the most preferable position is in the cab, where it is close beside the engineer, and the signals can be easily distinguished.

Each trigger and its accompanying spring constitute one unit, so that in the case of a locomotive carrying an installation to denote both "on" and "off" actions of the semaphore, two sets are required, but owing to the small space occupied by the mechanism they are carried in one box or casing. It will be observed that owing to the small number of parts and the comparative immunity from frictional action, the possibility of wear is considerably reduced. The triggers are held in sufficient tension by the spring to prevent them shaking with the oscillation set up by the train, and thus possibly giving a false alarm on the gong.

It will be observed that this apparatus does not supersede the present semaphore system, but rather supplements it, giving greater certainty and security, and enabling locomotive engineers to maintain high speeds in foggy or dirty weather with a greater degree of safety than is possible with the existing auxiliary signaling systems.

THE EXCAVATION FOR THE PENNSYLVANIA RAILROAD STATION, NEW YORK.

In our previous issue we gave illustrations of the noble building which will form the above-ground portion of the new terminal station of the Pennsylvania

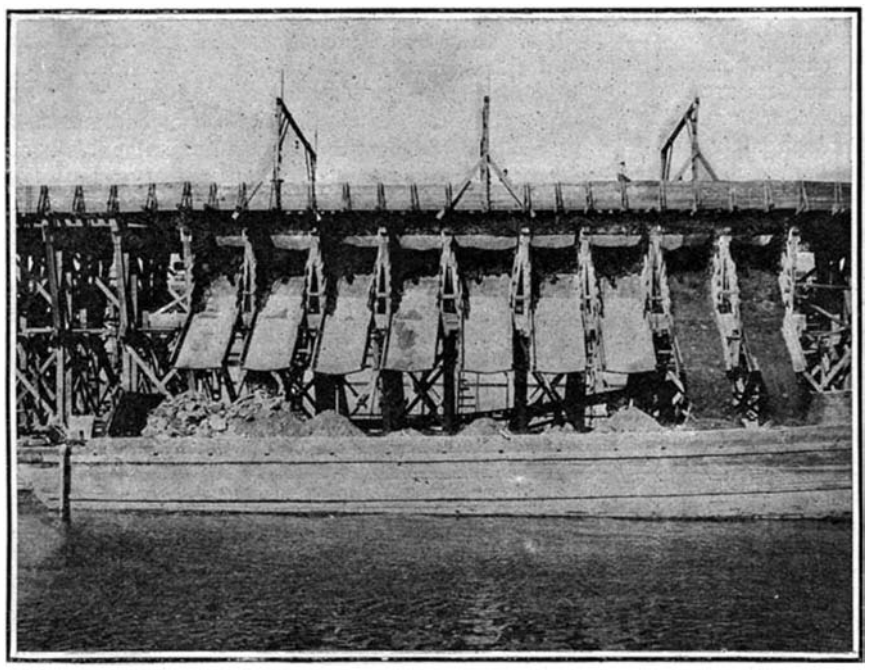

Dock Built on 32d Street and North River for Unloading the Material from Cars to Scows.

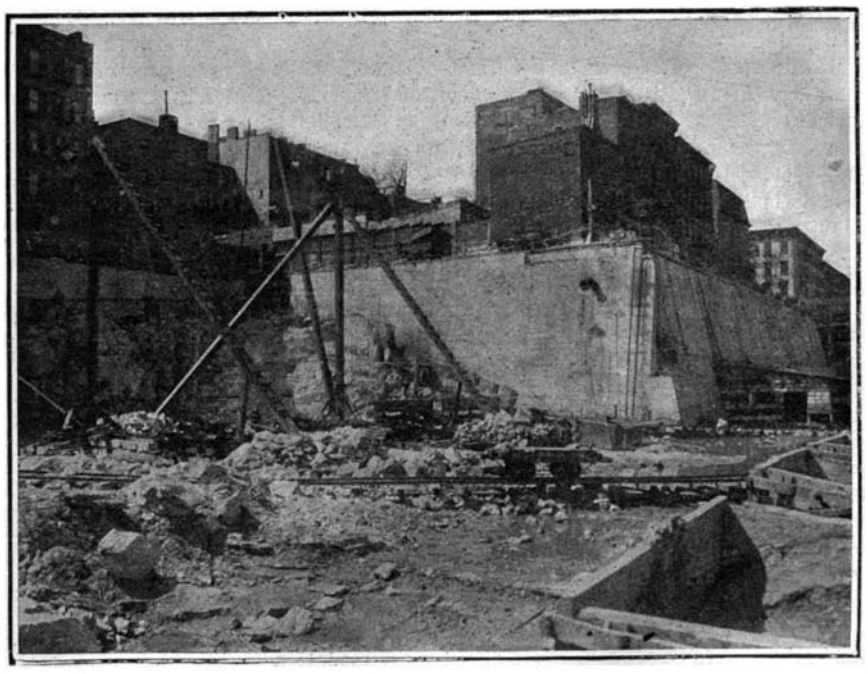

Site of Station Power House, Showing Massive Concrete Retaining Wall 50 Feet Deep by 25 Feet Thick at Base, Which Incloses Entire Excavation.

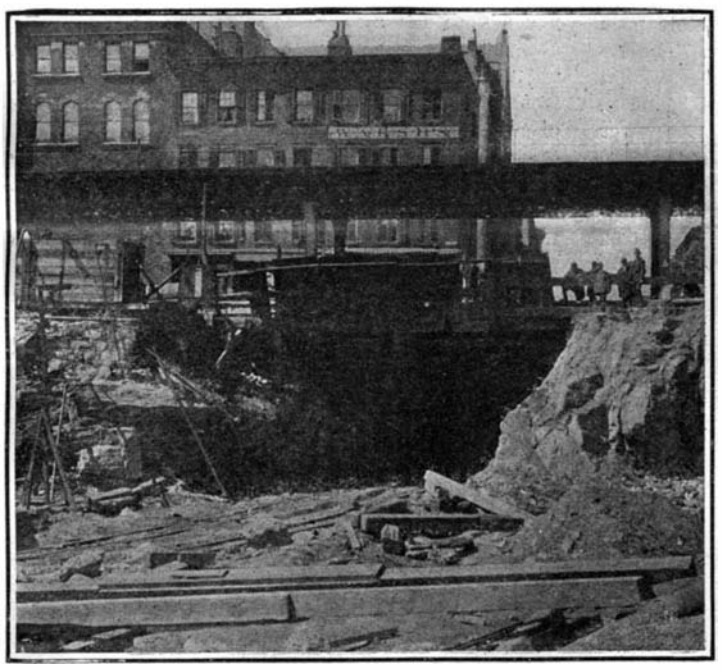

The Cut Below Ninth Avenue Through Which the Excavated Material is Hauled to the North River.

Seventy-Ton Steam Shovel Working on Northerly Side of Excavation at 33d Street.

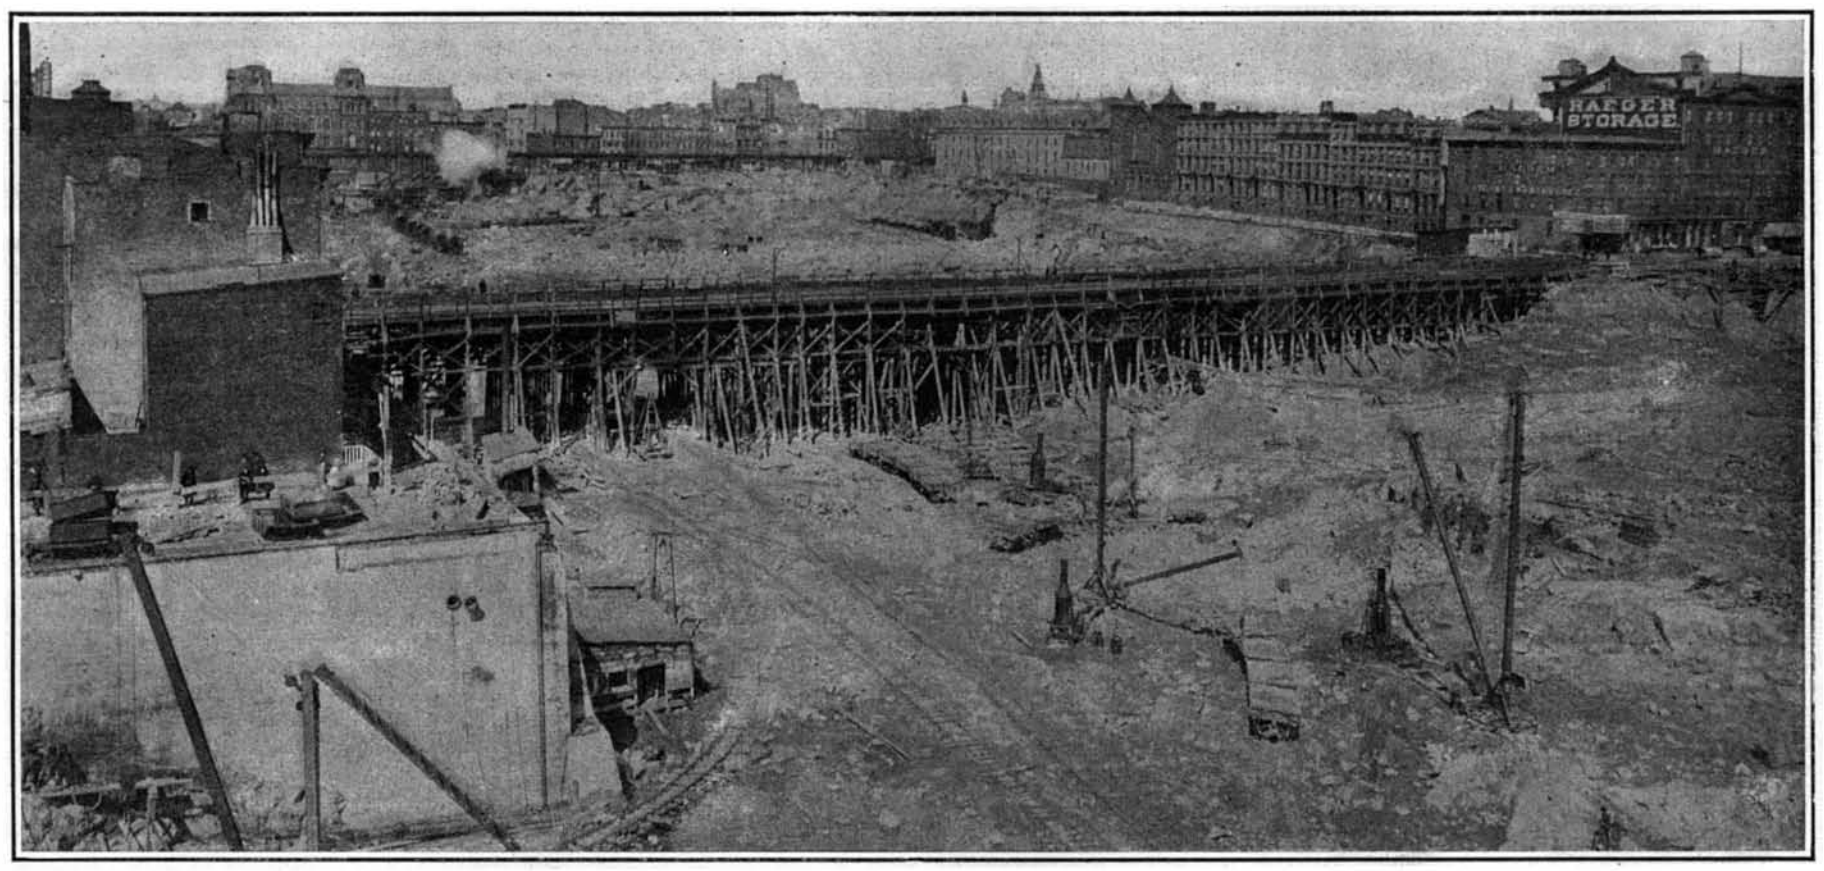

View of One-Half of the Excavation, Looking West, Showing the Trestle for Carrying Eighth Avenue During the Progress of the Work.

EXCAVATING FOR THE PENNSYLVANIA RAILROAD STATION, NEW YORK.

Railroad in this city. Great as are the proportions of the superstructure, with its great façades reaching for 780 feet in one direction and 430 feet in the other, it forms but the lesser portion of the station considered as a whole, with its tracks, switching yard, platforms, stairways, carriageways, baggage rooms, and other etcetera of a great terminal structure such as this. Moreover, this latter and larger half of the station, when the whole thing has been completed, will be entirely hidden from sight in a huge excavation lying entirely below the surface of the ground. It is to the vast preliminary work of preparation involved in digging out the underground portion of the terminal, that the present article is devoted.

If the reader will turn to the front page engraving, and bear in mind that it is a reproduction of a photograph which was taken from the tenth floor of a building lying to the northeast of the station site, he will get a clear idea of the form and size of the vast hole which is being dug in the heart of New York city. The excavation, which forms a parallelogram, includes two large city blocks. It is bounded on the north by Thirty-third Street, on the south by Thirty-first Street, on the west (the further end of the excavation as shown in the picture), by Ninth Avenue, and on the east, immediately in the foreground, by Seventh Avenue. Since the original dimensions were determined upon, however, two additions have been included—one on the southerly side, and the other on the easterly end. The southerly addition consists of a square plot for a power house measuring 90 by 160 feet. It will be noticed in the engraving, lying a little to the east of the long trestle that bisects the excavation at its center. The easterly addition, which measures 250 by 200 feet, will be seen in the immediate foreground. It extends from Thirty-second to Thirty-third Street, and it was purchased in order to afford accommodation for the convergence of the tracks where they leave the station to pass by two tunnels under Thirty-second and Thirty-third Streets, below Manhattan Island and the East River, to Long Island City. The total length of the excavation, including this last-named addition, is 2,050 feet, and its width is 500 feet. The total depth to which it must be finally excavated is 45 feet at the easterly end and 60 feet on the Ninth Avenue end, the average depth being about 50 feet. The total amount of material to be taken out is 2,000,000 yards, of which about one-half is rock.

As one looks at the long stretch of desolation presented by the station site to-day, it would be easy to suppose that either fire or a tornado had swept it bare of human habitation. Only three or four years ago the site was covered with over four hundred houses, stores, and other buildings, and was filled with some five or six thousand souls. The preliminary work of clearing away the buildings was not by any means the smallest task connected with the preparatory work for the new terminal station. The site once cleared, the work of excavation was of a very straightforward character and consisted of drilling, blasting, and steam shovel work. It was on July 1, 1904, that the cleared ground was ready for the New York Contracting Company, who had the job of excavation in hand, to commence operations.

Among the first portions of the work to be attacked was that of building the massive concrete retaining wall which runs entirely around the excavation. This is a big task in itself; for the wall is everywhere carried down to rock and for much of the distance extends to the full depth of the excavation which, as will be seen, averages 50 feet. The top of the wall is everywhere 5 feet in width, and it is built on a batter which brings the width in the deepest portions of the wall to an extreme base of 30 feet.

One of the problems which had to be met was that of maintaining the important thoroughfares which cross the station site. The principal of these is Eighth Avenue, and it was necessary, as the excavation proceeded, to build a massive trestle work with which to support not only the full width of the roadway, but the heavy sub-structure of the underground trolley electric road. Similar provision had to be made for Seventh Avenue, on that part of it which crosses the northeasterly addition to the excavation already referred to.

The problem of removing the 2,000,000 yards of excavation was a serious one in itself, and it will interest our readers to know that not a single cartload has been taken through the streets of New York city, the whole of it having been hauled by locomotives to the North River and dumped into scows to be disposed of on the Jersey shore. For handling the material a new wharf was built at the foot of Thirty-second Street and the North River. Along the wharf was constructed an elevated railroad which was extended through Thirty-second Street to about the middle of the block between Ninth and Tenth Avenues. At this point the tracks were carried down to, and under, Ninth Avenue, and into the station excavation. The whole of the work is covered with working tracks, which are shifted from time to time as the excavation proceeds, and all of these tracks converge to the deep cut below Ninth Avenue, of which we present an illustration. The material is loaded upon the cars either directly by steam shovels or derricks, and the loaded trains are hauled out to the North River dock, where the material is dumped into the chutes and discharged into the waiting scows. It is then towed down to Greenville on the Jersey shore of New York bay and used for filling in the huge freight yard, which the company is constructing at that point.

The force employed on the work has varied according to the conditions, nature of material, etc. The maximum force employed was about two thousand men, of which two-thirds were employed in day work, and the other third at night, and as much as 125,000 cubic yards a month has been taken out. At present the work is almost entirely rock excavation, and for this a total of about 700 men, including drillers, blasters, trackmen, etc., is engaged. Between sixty and seventy per cent of the work has been completed. As soon as the excavation has been carried down to grade, the steel columns will be erected and the steel and concrete floors put in place. When this work has been brought up to street level, the walls of the great station proper will begin to go up. It is the object of the company to so time the progress of the various sections of the work that no portion will have to wait upon any other, and the whole of this stupendous scheme of tunnels, terminal yards and passenger station may be brought to completion with the least loss of time and money through the enforced idleness of plants or delay of working forces.

Automobile Notes.

At the automobile carnival held last week at the Empire City track, some tests of technical interest to automobilists were held. Among the first day's events for touring cars were a flexibility test to show the range of speed on the high gear, and a braking test. In the former of these tests a circuit of the mile track was made at high speed, and then one-quarter mile was covered at the slowest possible pace that could be maintained on the high gear. The results were as follows: 50-horse-power Welch, mile in 1:21 2-5 (44.22 m. p. h.); ¼ mile in 2:34 (5.84 m. p. h.); speed variation, 39.38 m. p. h. 30-horse-power Marmon (4-cylinder air-cooled), mile in 1:37 4-5 (36.80 m. p. h.); ¼ mile in 2.17 1-5 (6.54 m. p. h.); speed variation, 30.26 m. p. h. 24-horse-power Clement Bayard, mile in 1:40 (36 m. p. h.); ¼ mile in 2:32 (5.92 m. p. h.); speed variation, 30.08 m. p. h. 24-horse-power Aerocar (4-cylinder air-cooled) mile in 2:07 2-5 (28.25 m. p. h.); ¼ mile in 3:27 4-5 (4.66 m. p. h.); speed variation, 23.59 m. p. h. 20-horse-power Northern (2-cylinder opposed) mile in 2:13 3-5 (26.87 m. p. h.); ¼ mile in 2:42 2-5 (5.84 m. p. h.); speed variation, 21.33 m. p. h. A 24-horse-power Autocar made a mile in 1:40 2-5 (35.85 m. p. h.), but the driver was disqualified for slipping his clutch when making the low-speed test. In making the brake tests the cars were obliged to travel at the rate of 40 m. p. h. for ⅛ of a mile before the brakes were applied. An Oldsmobile touring car stopped in 168 feet, and two other touring cars in 175 and 177 feet respectively. A Welch touring car ran an exhibition mile in 1:14, and a 12-horse-power Franklin touring car carrying four passengers beat a 24-horse-power Frayer-Miller touring car, winning a mile race in 1:45. Both these cars were air-cooled, and both have an enviable record for efficiency and economy.

Two hill-climbing tests of interest were held recently, one at Wilkes-Barre, Pa., on a hill christened "Giant's Despair," and another at Worcester, Mass., on what is known as "Dead Horse" Hill. The former hill is about 1⅛ miles in length and is full of "thank you ma'am's" and curves. The average grade is around 15 per cent and at places it reaches 27 per cent. The best time was 2 minutes 11 1-5 seconds. This was made by a 45-horse-power English Daimler touring car. A 50-horse-power 6-cylinder Stevens-Duryea touring car scored second in 2:27; and a 24-horse-power Pope-Toledo third in 2:56 4-5. A 22-horse-power double-opposed cylinder Buick car made the climb in 3:00 4-5; a 45-horse-power Pope-Toledo in 3:12, and a 35-horse-power Rambler in 3:18 1-5. The "Dead Horse" Hill course is one mile in length and straight. S. B. Stevens, on his 80-horse-power Darracq that ran in the last Vanderbilt cup race, covered this distance in 1 minute and 2 seconds, thus reducing by 7 seconds the record he made last year in his 90-horse-power Mercedes. A special 100-horse-power Stanley steamer, which is said to have made the climb in 50 seconds, was damaged and did not run. A 6-cylinder Stevens-Duryea was second in 1 minute 9 3-5 seconds, a 20-horse-power Stanley steamer third in 1:26, a 24-horse-power Pope-Hartford car fourth in 1:50, a 22-horse-power Buick fifth in 1:52, and a 16-horse-power Reo sixth in 1:58 1-5.

The Austrians use a stone blotting-pad that never wears out. A little scraping with a knife cleans it effectually.—Philadelphia Bulletin.

Correspondence.

Liquid Air and Powder Chamber Temperature.

To the Editor of the Scientific American:

In your issue of May 5 your editorial calls attention to the report of the National Coast Defense Board, in which it practically acknowledges defeat so far as greater velocity is to be obtained by large-caliber guns.

I have not noticed a report of liquid air being used for the purpose of keeping down the temperature of the gases; and while I have not had the opportunity of making tests in this line, I would like to see some experiments made to see if liquid air can be successfully made use of to this end, by placing a small quantity, say 25 or 30 cubic inches, at the back of the shell, or use a double shell, so there will be a wall of liquid air all around the explosive, the intense heat of which will instantly expand the liquid air eight hundred times, thereby reducing the temperature sufficiently to preserve the gun from erosion. L. C. M.

Houston, Texas, May 17, 1906.

Earthquakes and Steel Construction.

To the Editor of the Scientific American:

In your copy of April 28 I read the article about "Earthquake-Proof Construction" in which you recommend concrete steel for the reconstruction of San Francisco. Why not use steel and iron only, the same as on steamboats and other strong sea-going vessels? After a good, strong steel framework put in iron or steel panels between and also iron or steel floors and partitions; let such walls or panels and partitions be very light, perhaps not much thicker than sheet iron, which also could be made very ornamental and artistic, the same as steel ceilings are made now. The floors, naturally, should be made stronger. Such a building should be strong and elastic enough to withstand any earthquake; besides, it would be fireproof, and on account of the mild climate in California it would be comfortable to live in. Another thing which you advocate is a water tank on top of each building, at least in the business part of the city. Now, why not build large water tanks right under the streets in front of every large building?—because, if put on top of a building, they are apt to tumble down in case of an earthquake. If such tanks were put in the center of the streets with a manhole on the top, the firemen could very easily let down a hose and suck the water up with their fire engine; besides, such tanks would be most available at all times.

If my idea is wrong, kindly let me know where and why, because I would very much like to have your opinion about this. Please give me an answer through the Scientific American. A. Mayn.

Amsterdam, N. Y., April 28, 1906.

[It would be practicable to erect all-steel buildings; but concrete-steel would be cheaper and equally earthquake and fireproof. Water tanks under the streets would be too costly to be practicable.—Ed.]

The Metric System.

To the Editor of the Scientific American:

The Scientific American has committed itself as in favor of the introduction of the metric system of weights and measures, and this supposedly means the metric system exactly as it is used in France and other countries and without any modifications whatever. Scientists, as a rule, take this position with the exception of those whose work is in connection with the manufacturing end of a business; manufacturers, whom the change would affect most, are almost all against it; the most eloquent argument in this respect is the array of names and opinions recently collected by Mr. Halsey.

The metric system is consistent and excellent in many respects, and, had it been introduced into English-speaking countries at the time when it was introduced in France, it would have stayed and possibly have flourished. At the present time, however, a law such as that proposed by Mr. Littauer could not be enforced; manufacturers who will not or cannot face the expense, and buyers who are satisfied with the present measures, would stand united, and government interference would be impossible. There is no demand for metric measures from the buyers of mechanical or mechanically made goods. If the government insisted on purchasing metrically, the number of bidders would decline, prices go up, and deliveries be slow.

The division into halves and quarters is the most natural, and I will ask you to take a look with me at certain details of the domestic life of the country which has had the metric system in use for the longest period of time.

Come with me to a French market. The first stall is the dairyman's. "How much is this butter?" you ask. "Thirty-eight sous a pound," is the answer; not "Three francs sixty a kilo." If you ask the vender to give you 125 grammes, he will take you for a foreigner, and will bill it as "un quart." Eggs will be thirty sous a dozen; nothing is sold by tens. Potatoes you buy by the bushel (*boisseau*), which is not metric, and

a *barrique* of wine holds 227 liters. You buy cloth by the meter, half-meter, and quarter-meter, and the salesman would lift his eyebrows if you asked for 60 or 70 centimeters of ribbon.

The centime is to the American cent as the millimeter is to the inch. It is too small, and everything therefore goes by five centimes, commonly known as a *sou*. The centime does not harmonize with the coins in use.

The millimeter for engineering purposes is very inconvenient. I speak from experience. The natural divisions of the inch into halves, quarters, and eighths do not give us over three decimals; and if into sixteenths—which is a better working size than the millimeter and not very much longer—four decimals, the last being in all cases a 5. With the French system an 18-inch lathe becomes a 225-millimeter H.D.P. lathe; and to form a mental image of the swing a man is compelled to think of a height of 2¼ decimeters from the ways to the center. For very fine measurements the one-thousandth of an inch is in every way as satisfactory as the one-hundredth of a millimeter—I have found it more so—and all natural divisions down to thirty-seconds can be read in thousandths and halves or quarters of thousandths. We are, therefore, getting the benefits of both the natural and decimal divisions, and there seems to be no reason whatever for adopting a different standard unit which is as arbitrary as ours, when we, Anglo-Saxons, hold the controlling interest in the markets of the world.

When it comes to the laboratory, matters are very different, and I will agree that the interrelations of the gramme, the cubic centimeter, and the centiliter are of the greatest utility. For analysis, the milligramme and the centiliter are vastly superior to the English measures; but the quantitative work done in the laboratory in no way influences the weights and measures of the works to which these laboratories are attached.

Let us have the metric system by all means for laboratory work, but not for the vastly greater amount of work which does not require delicate instruments and intricate calculations. We cannot use a microscope on the stars or a telescope on bacteria, nor can we use a reading glass for either. A system which will suit both science and industry has not yet been devised.

If you will expend your spare energy on introducing the centigrade thermometer, killing off antiquated wire gages and the like, you will be working with a better chance of success than by backing a change which is not warranted by necessity, and not demanded by the majority of those who would be affected by the change. It is even opposed by the manufacturers of gages, whom you might expect to find in the forefront of its champions.

ALFRED SANG.

Pittsburg, Pa., April 14, 1906.

Wood and Concrete Construction.

To the Editor of the SCIENTIFIC AMERICAN:

When your expert on concrete construction next discusses his specialty, please let him take up the practicability of using concrete or armored concrete in wooden framework. In brief, could it be used in walls between laths and weather boarding? If so used, would it do away with the necessity of rough-boarding? Could it do away with the laths, too? Would the steel bands, screwed or nailed to and between the joists, hold the joists and concrete sufficiently tight to prevent the joists from falling away as they dried out? If practical in walls, would it also do for use in floors, and if so, would it be of enough advantage from a fireproof and noise-deadening standpoint to warrant its use?

All these questions are asked by a decidedly amateurish delver into the mysteries of how to build the best home at the least expense consistent with good work.

MORTON WATKINS.

No. 223 West 106th Street, New York city.

[It would hardly seem desirable to combine concrete construction with wooden framework, notwithstanding that there are apparently no technical difficulties to prevent this. The impracticability of the construction would lie in the fact that while the concrete would, of course, be fireproof and moisture-proof, the woodwork could not be considered to answer these requirements, and, therefore, the resulting structure would correspondingly be only semi-fireproof or semi-impervious to moisture. The woodwork would probably pull away from the concrete as the latter dried out, for not only would the concrete contract, but the wood itself would shrink when the moisture which it had absorbed from the water in the cement had evaporated. This shrinkage both of the wood and of the concrete would probably not be sufficient to cause much damage, and the steel bonds imbedded in the concrete secured to the wood would doubtless hold the structure rigid. If such a construction were used, the builder would probably be able to dispense with rough-boarding, and the resulting partitions and floors would undoubtedly be more nearly soundproof than an ordinary frame construction. It would be far better to build directly of concrete, and probably the expense would be no greater in that case.—ED.]

APPARATUS FOR VIEWING DIFFRACTION COLOR PHOTOGRAPHS.

Some seven years ago Prof. R. N. Woods, now of Johns Hopkins University, Baltimore, described his new diffraction process of color photography, which was a novelty on account of its simplicity. The process is fully described in the SCIENTIFIC AMERICAN SUPPLEMENT No. 1227. Until recently no satisfactory instrument was invented for viewing the diffraction color photographs. The improvements in this line



INTERIOR OF THE DIFFRACTION CHROMOSCOPE.

have been made by Mr. Herbert Ives, B.Sc., and Mr. Fred. E. Ives, the inventor of the kromoscop, which greatly simplify the necessary apparatus and considerably reduce its cost. It is called a multiple-slit diffraction chromoscope.

The diffraction color photograph is preferably made on a small plate of glass about the size of a lantern slide for convenience of handling and viewing, although there is no reason why it may not be made larger. The diffraction photograph is a mosaic com-

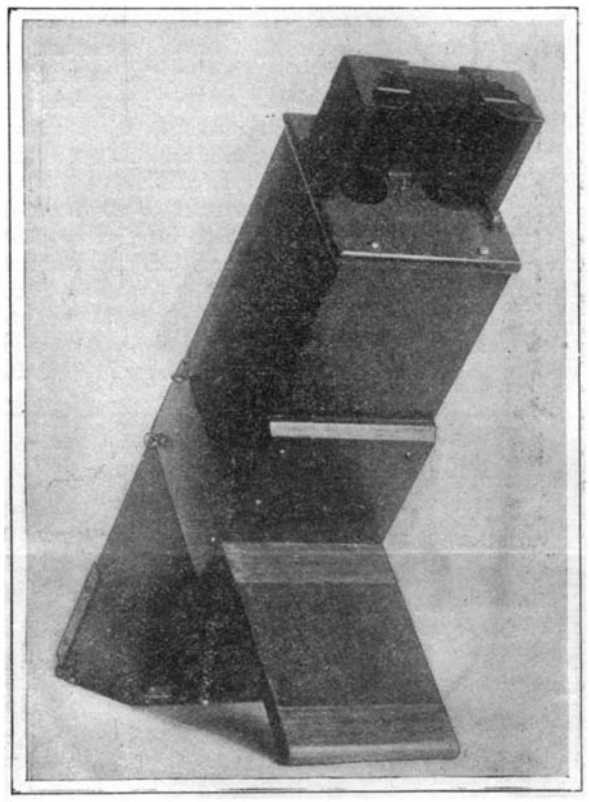

VIEWING END OF THE DIFFRACTION CHROMOSCOPE.

posite image in regularly spaced microscopic indented lines of three photographic color records, representing the primary colors, red, green, and blue. The red element of the composite color record is made up of 2,406 lines to the inch, the green of 3,000 lines, and the blue of 3,606 lines. The method of manufacture is to print on a bichromatized film respectively one after the other and over each from negatives originally taken in the camera, through screens of red, green, and blue with gratings of lines as above mentioned;

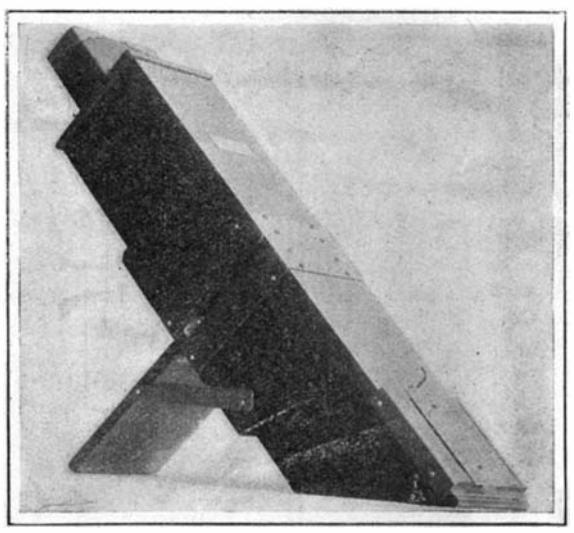

THE IVES DIFFRACTION CHROMOSCOPE.

then developing the composite print in the usual way by hot water. From this plate duplicate impressions can be made by a special method. This duplicate, exactly a counterpart of the original, is bound between two plates of glass, and becomes the medium for producing the colors when viewed in the instrument. If the glass plate is held up to the light behind a sheet of white paper, it appears to be perfectly clear. When put in the instrument the light is dispersed evenly as it passes through the plate, and the colors are reproduced exactly as in nature.

The diffraction chromoscope is essentially a dark box with a slit at each end and lenses in the middle to pick up light from one slit and concentrate it upon the eye at the other slit. If both slits are placed in the axis of the box, and the photograph inserted, it shows no color whatever; but if either slit is displaced in a direction parallel to itself, the direct light is no longer brought to the eye, but at the correct position light bent and dispersed by the microscopic diffraction lines takes its place, and owing to their disposition and distribution the colors seen correspond exactly to the colors of the object photographed. Mr. Ives's diffraction chromoscope has four primary slits instead of one, utilizing first and second order spectra on both sides of the axis, and thereby securing sufficient illumination to permit of use in diffused daylight, which would otherwise be impossible.

In the diagram *A* represents the four slits, with a central plate, *B*. Directly under *B* is a mirror which reflects the light upward through the plano-convex lenses, *C*, about three inches in diameter, also through the photograph, *D*, and openings, *F*, through the eye lenses, *G*, cemented to the inner side of the glass slits, *H*.

The hook shown just above the plate *B* is to hold an incandescent light for artificial illumination.

The upper illustration shows clearly the viewing slits, the hinged brace for supporting the box, and on the side is a pivoted plate which can be swung around by removing the screw eyes, for the purpose of taking out the lenses for cleaning.

The lower illustration shows the slot opening on the side of the box for inserting the picture, the latch for locking the supporting brace, the plate and slits at the bottom, and the hook for locking the hinged mirror. By releasing the hook the mirror can be folded back on the box to be cleaned.

By using four primary slits in the bottom, a greater quantity of light is admitted, giving correspondingly a more brilliant illumination of the image than would be the case if but one slit was used.

Altogether, it is about the simplest natural color reproducing apparatus yet devised, not liable to get out of order. It is calculated to excite wonder and astonishment to those unfamiliar with the optical principles involved, for from an apparently invisible picture without color is reproduced one perfect in color. Mr. Ives has devised special cameras for producing the original negatives.

The Current Supplement.

The current SUPPLEMENT, No. 1587, has for its first-page article two views of the Brunnen-Morschach Alpine railway. "Some Practical Experiences with Steam Turbines" is by C. E. Stanton, and will be welcomed by all engineers. "Reservoir, Fountain, and Stylographic Pens" is a continuation of a valuable series. "Cement Materials and Industry of the United States" is by Edwin C. Eckel. "Electricity in the Home" is a finely illustrated article showing novel electrical contrivances. "Surveying on the Farm" is a valuable article. The Science, Electrical, and Engineering Notes will be found in their accustomed places.

Lower Foreign Postal Rates.

The Congress of the International Postal Union, which has been in session at Rome, practically completed its labors on May 22. The Congress has inaugurated several changes which directly affect the public, and the most important of these is the reduction of the rates of foreign postage for heavy letters. Not only has the unit of weight been raised from 15 to 20 grammes, but the postage has been decreased as well from 5 cents to 3 cents for each unit of weight in addition to that constituting the first charge.

As the Anglo-Saxon countries do not use the decimal system, these changes will be even more favorable to them than to those which use the system, for the British delegates succeeded in obtaining the ounce as the unit equivalent to 20 grammes, while as a matter of fact an ounce is in excess of 28 grammes. Unfortunately, the British and Japanese proposals for a reduction of the initial rate to 4 cents failed. Universal penny postage advocated by New Zealand was not considered practicable. Other important changes were instituted relative to the internationalization of the right to use the left-hand portion of the address side of picture post cards for writing other than the address, and the use of post cards having an attached reply coupon.

The manufacture of cement in the United States continues to make remarkable progress. Whereas in 1890 there were sixteen factories, producing annually 335,000 barrels of Portland cement, there were, in 1905, eighty-two plants, with an estimated annual output of 31,000,000 barrels. The manufacture has increased about a hundredfold in sixteen years, for in 1889 the total production was 300,000 barrels. Since the great extension of the use of this material, the amount of natural cement produced in America has rapidly declined.

WATER STERILIZATION.

BY DR. ALFRED GRADENWITZ.

Whereas chemical analysis alone was formerly relied upon to determine the degree of purity of water, a still more important investigation has been found of late years in bacterioscopic examination. In fact it has been shown that water may contain all kinds of bacteria through which infectious diseases are produced

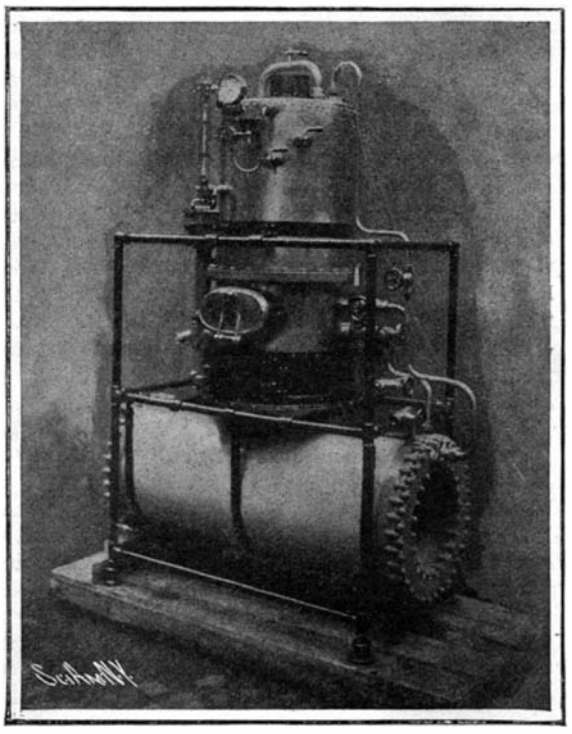

Fig. 3.—Stationary Sterilizer Having a Capacity of 66 Gallons per Hour.

and spread. Recent experiments have proven beyond doubt that bacteria liable to injure the health of man are rapidly killed at a temperature of 221 to 230 deg. F., and, provided each drop of the water be submitted to such a temperature, even if for but a short interval of time, the water in question may be safely said to be sterile. It will not, however, be fit for use as drinking water, before being cooled down to a temperature suitable for its consumption, while the well-known vapid after-taste should be eliminated by mixing the water with air free from bacteria in order to restore to it the character of fresh water. Filtration will, moreover, be likewise necessary in many cases.

A suitable type of sterilizing apparatus where these various operations are carried out effectively has been patented by Messrs. Rietschel & Henneberg, of Berlin, and is described herewith and illustrated in the accompanying engravings.

Each of these outfits consists essentially of a boiler, where the water is heated; a cooler, where it is brought down to a suitable temperature, and a filter for cleaning and aerating it. In the boiler, which may be heated by any kind of fuel or by steam from another source, the temperature of the feed water is raised to a temperature of 221 to 230 deg. F., corresponding to a pressure of the steam of 0.3 to 0.5 atmosphere. Now, as in any other boiler, owing to the difference in the specific weights of the cold and warm waters, there is a more or less rapid circulation, and any shock throwing the feed water from the filter into the boiler will produce a cold current up to the boiling surface, the cold and warm waters not being susceptible of immediate mixture owing to their difference in density. If in a similar boiler water be drawn from the warmest place, there will always be the risk of obtaining water that has just come to the surface under the action of the currents referred to, before having undergone the amount of heating required to kill the bacteria.

In the Rietschel & Henneberg boiler, however, no drop of water leaves the boiler before having reached the proper temperature and without having been maintained at the same during a certain period. This result is obtained by arranging within the water compartment a coil which causes the steam pressure above the water surface to act upon the water discharged from the warmest part of the boiler. The latter requires some time to traverse the coil, and thus the boiling water that surrounds the latter will prevent any loss of heat, while in some cases it will even supply to the water further heat. As the coil carries a thermometer immersed in the discharged water, a means is provided readily to control the operation.

A special feature is a valve by means of which steam may be conveyed from the sterilizing boiler through all the conduits and apparatus, that is to say, throughout the path of sterilization, and which allows the whole of the conduits to become sterilized before the plant is started. In the case of the intermittent operation of the plant a special arrangement is provided in the shape of a double-seated diaphragm valve to replace the serpentine above described.

The second part of a sterilizing plant is the cooler. This permits of a calorific exchange between the highly heated sterilized water issuing from the boiler and the feed water used for cooling the latter, thus raising the feed water to a temperature as high as possible. By means of the return current principle, the sterilized water can be cooled to a temperature which lies only 5 to 9 deg. F. above the initial temperature of the feed water, while the feed water supplied to the boiler is preheated at the same time to the boiling point. This recovery of heat is unquestionably an advantageous feature, and the amount of heat to be produced in the boiler corresponds to the difference only between the admission and discharge temperatures of the boiler, i. e., to but a few degrees. The third part of the plant is the filter, where the sterilized and cooled water which still contains impurities of an earthy and vegetable nature, as well as iron precipitates and the like, is purified. The water which has acquired a disagreeable

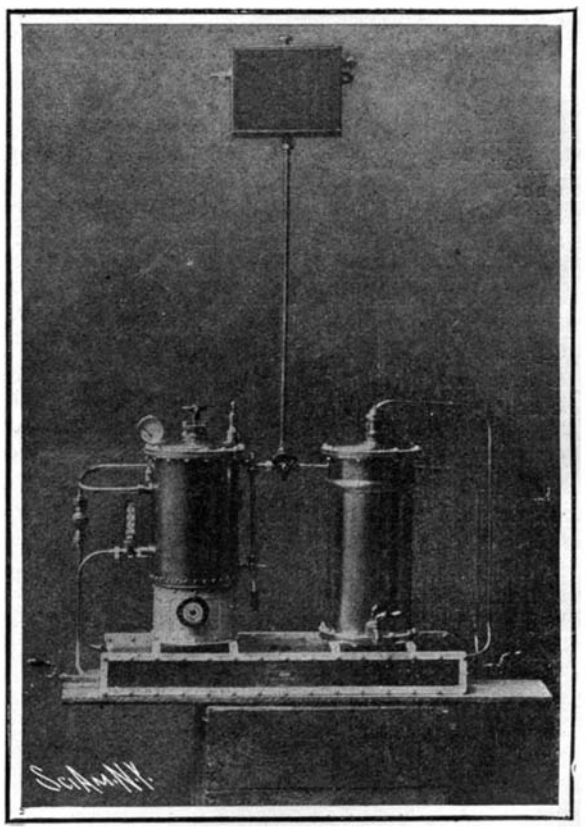

Fig. 4.—Steam-Operated Water-Sterilizer Producing 26.4 Gallons of Sterilized Water per Hour.

aftertaste due to the boiling process is finally saturated with air in the filter and is passed over substances which destroy the vapid boiling taste and restore to it the character of real potable water. After entering the filter from a kind of rose, the sterilized water falls in the form of a spray on the dense filtering material placed underneath, thus coming into intimate contact with the sterilized air fed through a special filter. A strong addition of bone charcoal has been found to be the best means of destroying any taste in the water due to boiling.

A perfectly sterilized water can, it is true, be also obtained by distillation, but the above-discussed sterilizing process is much less costly, while it is just as efficient. In fact, one liter at 0 deg. requires for distillation about 640 calories, while 110 calories, that is to say, about one-sixth as much, are necessitated for sterilizing the same amount. Furthermore, about 90 per cent of this heat is recovered by the cooling process in preheating the feed water. Wherever the freeing from noxious germs (bacteria) is the most important point, sterilization will moreover prove more satisfactory, while distillation should be resorted to only for chemical purposes, where soluble salts, for instance, are also to be eliminated.

By the courtesy of Mr. R. A. Hartmann, of Berlin, who is the constructor of the apparatus, we are enabled to illustrate and briefly describe some of the most interesting special types showing the large variety of applications of which the apparatus is susceptible.

For use in time of war, transportable sterilizers have been constructed having a capacity of 500 liters of pure water per hour. Figs. 1 and 2. This capacity may be said to correspond to the re-

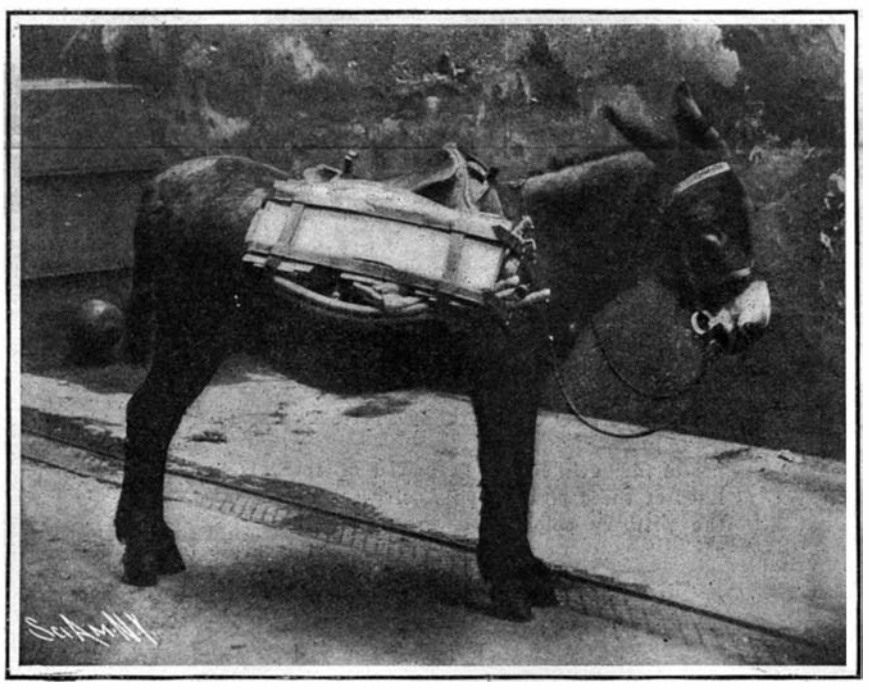

Fig. 7.—The Sterilizing Outfit Packed on a Mule.

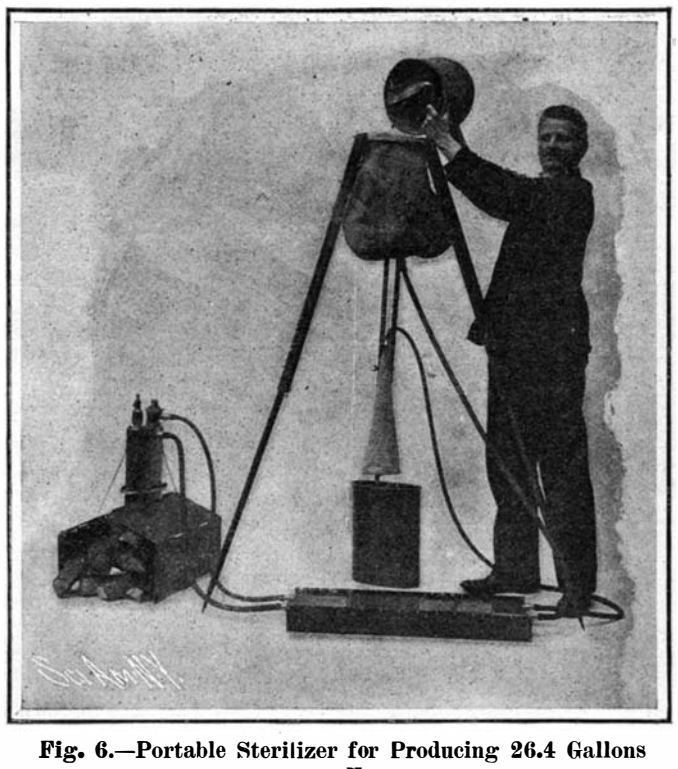

Fig. 6.—Portable Sterilizer for Producing 26.4 Gallons per Hour.

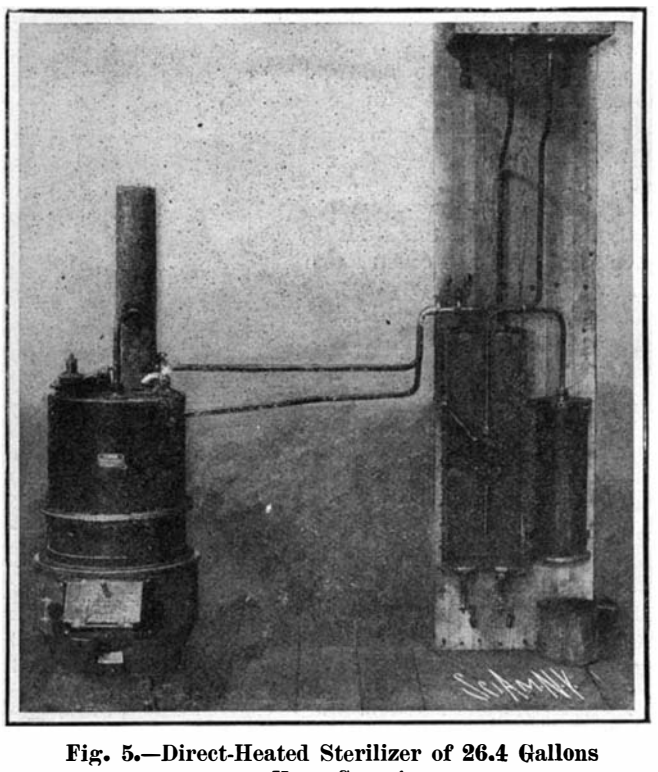

Fig. 5.—Direct-Heated Sterilizer of 26.4 Gallons per Hour Capacity.

VARIOUS FORMS OF STATIONARY AND PORTABLE WATER STERILIZING APPARATUS.

quirements of one battalion. Two pumps, *P* and *P'*, draw the water into the mechanism through a suction nozzle, where any larger impurities are retained. By the convenient arrangement of two three-way cocks, *D*, *D*, the water entering can be conducted at will either into the boiler, there to be sterilized, or into the cooler, *C*. In normal operation, the pump, *P*, is used as boiler feed pump while *P'* is connected to the cooler. After entering through the feed pump, *P*, the cold feed water is raised rapidly to the proper temperature in the boiler and should be left there for about 10 to 15 minutes at a steam pressure of about 0.5 atmosphere. In the type of sterilizer represented in Figs. 1 and 2, which is of 500 liters output, the cooling water is fully utilized for feeding so as to involve no consumption of the same, a fact which obviously reduces greatly the cost of operation.

Though these sterilizers are intended primarily for use in connection with transportable plants, stationary installations are also constructed on the same principle. The stationary sterilizer represented in Fig. 3 has a capacity of 66 gallons per hour. A special feature of this type of apparatus is an electrically operated minimum thermometer located at the outlet of the coil. As soon as this thermometer registers below a given temperature, it will ring an alarm, thus informing the operator of the fact that the outlet water has fallen below the admissible minimum temperature. Similar plants of about 26 gallons output will be found suitable for the use of single houses or special sections in hospitals (see Fig. 4). A like apparatus, but for intermittent operation, is shown in Fig. 6. The apparatus will prove especially useful in connection with scientific and military expeditions, and a special outfit having a total weight of about 100 pounds has been constructed for such purposes. This can be either loaded on pack animals or can be carried in sections by two men (see Figs. 7 and 8). It may be mentioned that similar types of apparatus have been used to advantage in connection with the present military operations of the German troops in Southwestern Africa.

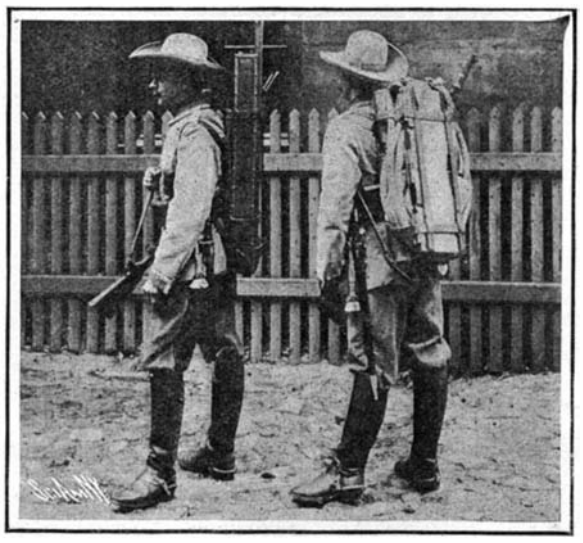

Fig. 8.—Portable Sterilizer Carried by Two Men.

Fig. 9.—Portable Sterilizer in Operation.

Irrigation in California.

Southern California leads the United States in diversity of methods of application, in scientific distribution and conservation, and in the extensive character and boldness of design of its irrigation works. Surface water, drainage water, seepage water, water from artesian wells, and from tunnels penetrating the mountains, and water impounded in large and costly reservoirs are alike utilized.

The irrigation systems of this part of the State are known all over the world, and have created a prosperous commonwealth in a region which would be a scene of utter desolation without them. The concrete examples of intensive farming with this climate and soil are such charming settlements as Riverside and Redlands, whose praises are sung everywhere. North of this section, and from an irrigation standpoint considered almost equally important, is the San Joaquin Valley. The San Joaquin River supplies 54 per cent of all the lands irrigated in this State, but only 30 per cent of the total number of farms and 8 per cent of the irrigation canals. These percentages indicate an entirely different type of farm from that which prevails in the southern region. In the latter the high-priced products produced, the heavy cost for water, and the necessity for careful and intensive farming have resulted in the smallest farm units in the West. The farm units in the San Joaquin Valley average more than 100 acres, while in the southern region they are less than 23. In the valley of the San Joaquin the methods of irrigation have been more nearly typical of those of other sections of the West. Water has been wasted, extensive areas of the valley have been damaged and must be drained to be made productive.

The tendency in the northern valley has been to cultivate general crops and to retain large areas for grazing, with the result that farming has not been so profitable as in sections where special crops are grown and all of the land cultivated. A recent investigation of the agricultural, climatic, soil, and power possibilities within and about the borders of this valley furnishes an important contribution to our knowledge of this section of California. This investigation has been carried on by the Division of Hydrology in the United States Reclamation Service, and extended from the southern end of the valley northward to the southern line of Madera County, covering approximately 7,880 square miles. Within this area it was found that the amount of underground water which lies near the surface, and is available for irrigation purposes, is enormous, and that its value is but little realized. Thus far only about 250 second-feet have been developed for municipal and agricultural purposes, which is a very small percentage of the total amount available. The valley is filled largely with granitic sands and gravels, and there are large surface deposits of silt and rich alluvial mold. This filling is saturated with the flood waters and the returning irrigation waters, which thus constitute an extensive underground reservoir which, properly developed, will serve to reclaim thousands of acres now barren or in stock ranges. The situation of this section in relation to adjacent non-productive portions of the West is such that it will inevitably become of increasing importance from an agricultural point of view. It is the conviction of the board of engineers which considered the data obtained by this investigation, that the greatest increase in the agricultural development of this valley will come from a proper utilization of this available water power. This was doubtless impressed upon them in some measure by the fact that in Southern California underground waters to-day supply more than half as many farms as are irrigated by all of the ditches of the San Joaquin River. In order to develop these underground waters, cheap power is necessary. The cheapest power available is that which is developed by the transformation of the water power of the Sierras into electrical energy, and its distribution in this form to points where it is needed. Of the numerous streams that flow from the Sierras to the valley, upon which electrical power can be developed, the only one that remains available for the Reclamation Service is the Tuolumne. Upon all of the others the important reservoir sites and rights of way are in the hands of private or corporate interests. In fact, a monopoly of power now exists, fostered and encouraged by the unwise policy of giving away without restriction or reservation these most valuable power sites. The people of the valley and of the whole State in general are now awakening to the fact that they have a direct interest in the preservation of these reservoir sites, in order that they may be available for future use by the government in irrigation development. They recognize that these valuable power sites should no longer be permitted to pass from the government into the hands of monopolists, who exact from the people undue profits from a few which they develop, and prevent the development of the rest; that these public utilities should be so guarded that the benefits arising from their development shall accrue to all, and not to the few. These conditions do not alone prevail in California; they exist in every mountain State. There is a great demand from the people that these valuable power possibilities should be retained for the use of the whole people until further development can be undertaken by communities or by the government.

The San Joaquin Valley offers one of the most important situations for the development of large water power at small expense found anywhere in the United States, and there have been extensive developments of this power on many of the more important streams. A peculiar condition arises from the fact that the lands of the valley are all private lands, many of them in large holdings; while the Sierra Nevada Mountains, which border the valley on the east, are practically all covered by Forest Reserve withdrawals and are largely public lands. The normal flow of all the rivers of the valley (the summer flow in this valley is greater than the winter flow) is now diverted for irrigation purposes. Aside from the increase which may come from more careful and systematic irrigation and cultivation, agriculture cannot be extended materially from the surface water supply. It is the undivided opinion of the engineers that the greatest increase of irrigation in the future will result from pumping rather than from impounding and regulation of flood waters.

So much impressed were they with the possibilities of this section, that they recommended that the investigation of the underground waters be completed, and that all reservoir sites within the Tuolumne basin, together with the necessary lands for rights of way for power conduits, be withdrawn from entry pending further investigation, and held for future use by the United States in the development of irrigation in the valley. They also recommended that if any of these rights of way or reservoir sites are released for necessary public use, it shall only be upon the condition that the

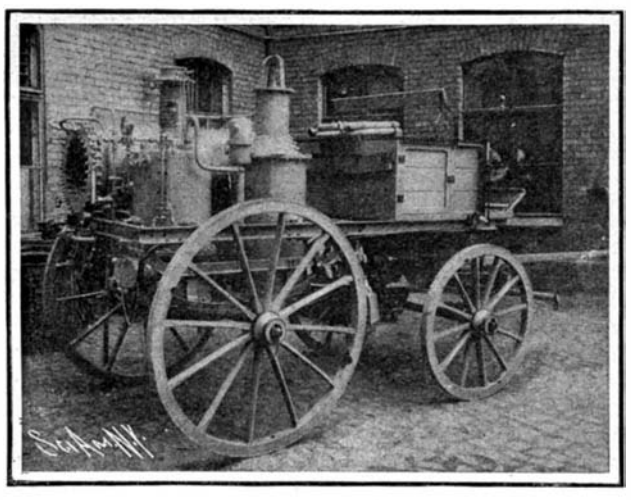

Fig. 1.—Portable Military Sterilizer. Capacity, 500 Liters per Hour.

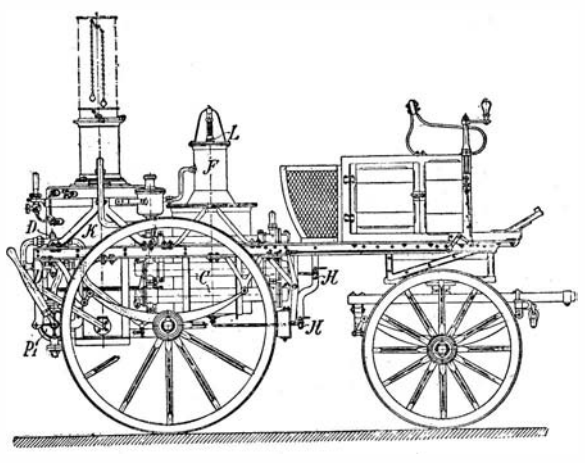

Fig. 2.—Diagrammatic View of the Portable Military Apparatus.

VARIOUS FORMS OF STATIONARY AND PORTABLE WATER-STERILIZING APPARATUS.

United States may at any time take control of them by paying a fair price for the works alone, exclusive of the value of the location and water rights.

THROUGH A WINDOW OF THE SEA.

BY CHARLES FREDERICK HOLDER.

Along the great blue current of Japan that sweeps down the California coast, a climatic peacemaker, is strung a chain of gemlike islands. They are the summits of offshore Sierras, a coast range of California that has been partly overwhelmed by the sea, their tops now crested with verdure, and washed by the warm stream that modifies the entire coast. These islands, from twenty to sixty miles offshore, rise from very deep water without premonitory shoals or reefs,

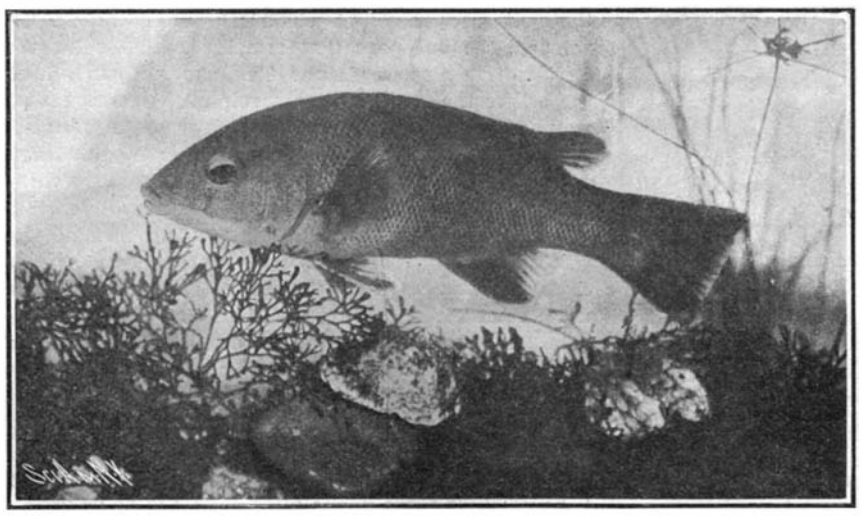

The California Sheepshead.

and could we see them divested of the ocean they would appear like gigantic needles rising from the bottom. All have a peculiar beard, or protecting growth of weed, that constitutes a perfect laminarian forest about them, a giant seaweed growing in water sixty or more feet in depth, and forming a natural wave brake and a home for countless marine animals.

The vines are sometimes one hundred feet in length, vast cables, with broad crimpled leaves of a dark olive hue, which assume graceful shapes in the tide; and when one peers down into the turquoise water the scene is often a revelation. A new world is opened up, and the real beauties of oceanic or submarine scenery are appreciated. The great leaves are carried by the fitful currents that sweep these islands in every direction. Sometimes they are extended at full length and appear like a horde of green snakes; again they lie upon the surface, listless and drooping, taking myriads of shapes, and forming nooks and corners of great beauty.

So attractive are these kelpian forests, so fascinating, that what is known as the water glass has been elaborated into a glass-bottomed boat, which virtually has several large plate glass windows through which the passengers may look down into the kelp forests and view a panorama of the sea. These glass-bottomed boats range in size from rowboats in which a dozen people can be taken out, to side-wheel steamers, so arranged that they can float over the forest and view its wonders up and down the coast. One of these odd craft is so large that several hundred passengers can look down through its windows at one time.

Avalon is the headquarters for the glass-bottom-boat men, and their vessels cruise up and down the smooth north coast of Santa Catalina, that appears to be admirably adapted for the purpose, being in the lee and abounding in coves and bays—the mouths of cañons that nearly always are smooth and often like disks of steel. There are no hackmen at Avalon; it is a sort of mountain Venice, and carriages are at a discount. The captains of the glass-bottom boats replace the hackmen of the mainland and cry the merits of their strange craft, each of whom claims to the knowledge of some especially attractive sea meadow or glade over which he will take one.

What the voyager in the glass-bottom boat generally sees, and with the same surroundings, is shown in the accompanying illustrations of animals, taken from the kelp forests of Avalon and adjoining waters under the direction of the writer; in other words, each photograph shows the animal as it has been seen by the writer; and as the various forms have never before been photographed and some have never figured in books, they have an especial interest as a contribution to popular entertainment and exact zoological knowledge.

When the glass-bottom boat starts the passengers are at first regaled with the sandy beach. In three or four feet of water the wave lines are seen, the effect of sea on soft sand, the delicate shading of the bottom in grays innumerable. Now the collarlike egg of a univalve, or the sharp eye of a sole or halibut protruding from the sand. A school of smelt darts by, pursued by bass, and as the water deepens flocks of surf fish, gleaming like silver, appear; then a cormorant dashing after them, or perchance a sea lion browsing on the bottom, or in pursuit of prey. Suddenly the light grows dimmer and almost without warning the craft is in the depth of the kelpian forest. The fitness of the term "hanging gardens" is apparent, as the great leaves appear to rise near the surface, then droop over, forming arches, parterres, and loops, conveying the impression of being suspended at the surface. The color is a deep olive grading to yellow, the leaves a foot or two wide and very long, their edges crimpled. Each is seen to be covered with a lacelike network of great delicacy. Fragile plumes wave to and fro, telling of worms or minute Sertularians. Here the tracery is white, the deposit of some animal, gleaming like frosted silver, while others are of lavender hues. The vagrant beams of light that strike the surface bring out the tints and shades in strong relief. Through a loop of kelp is seen the blue of the deep water, and poised in it, an angel fish of vivid orange tint that persists in taking black through the camera. A school of these fishes swim into view, turning their gorgeous shapes upward and eyeing the strange window in which are mirrored many faces. With them are small fishes of brilliant blue iridescence suggesting the strange vagaries of nature, as the very young angel fishes are almost entirely blue, and called by the skipper electric fishes; but as they grow the blue merges into yellow and the adult blossoms out in its perfect coat of gold or orange.

On the leaves are singular crabs, red and olive, with square shells, and deeper, in the crevices of the moss-covered rocks, are gigantic spider crabs, mimicking the rocks in shape and hue. The nature of the forest is ever changing. Now great pompons of a dark weed appear, a tint born of the deep sea. It waves gracefully as the slight swell comes in, and as it turns aside, displays the very giant of the starfishes, a huge creature garbed in red with white spikes or tubercles scattered over it, making it a most conspicuous object among the greens. In the crevices are smaller stars; some a vivid red, others dark, with arms like snakes.

Among the weeds long serrated waving spines are seen—the antennæ of the California crawfish, or spiny lobster, which takes the place of the lobster here. Its red, yellow, and brown tints so harmonize with the weed that it is almost impossible for the novice to see it, although he has the word of the skipper that the spines are waving beneath his eyes. At night the crawfish comes out and wanders abroad in these pastures of the sea, and even now he can be seen as the kelp is brushed aside, trim, debonair, ready to dart backward at the slightest warning.

The bottom changes to a finer moss or weed—a deep velvet green, with here and there iridescent tints, and in it lie great sluglike sea cucumbers in brick-red shades. Presto! the captain of the glass-bottom boat transports his passengers to a deep glen in which lacelike weeds rise and poise, forming a natural canopy for long-spined black echini, or sea urchins—formidable creatures, sea porcupines which recognize the presence of some possible enemy and attempt to hide among the weed by plunging deeper into its mazes. Splashes of white tell of a smaller sea urchin, and nearly every nook and corner of this sea forest is inhabited by these aggressive creatures.

The bottom of the sea along this rocky shore is a color scheme of marvelous beauty. Green is the predominating tone, but green in countless shades and expressions. Sometimes a short wiry weed covers the bottom, constantly being waved aside to display other and more attractive colors: weeds in purple and brown, rocks of lavender incrusted with a flaming red sponge, or a mass of pink barnacles from which rises the delicate mauve tracery of their breathing organs. This sea tapestry is constantly in motion, so has the appearance of changing light, shade, and tint, and displaying some new creature to the voyagers of the curious craft with windows looking down into the sea.

The window drifts past strange holothurians, like monster slugs lying on painted rocks, the *bêche de mer* of the Chinese, in which lives the glasslike fish, Fierasfer; by hordes of mimic flowers, Serpulæ, with crowns of red, white, blue, and seeming gold. The lightest jar on the boat and they are gone, to appear slowly, unfolding like flowers. Near them are tube-building worms, with slender organs; and out from beneath a rock wave the tentacles of the octopus, or perhaps the paper nautilus.

The animals of the hanging gardens are not confined to the kelp in its variety, or to the rocks of the bottom. The blue water where the sunlight enters brings out myriads of fairylike forms, poising, drifting, swimming, the veritable gems of the sea. Some are red as rubies, others blue, like the sapphire; some yellow, white, topaz, green as emerald; or emitting flashes of seeming phosphorescent light. Ocean sapphires they are called, minute crustaceans (Sapphirinæ), that are in such numbers that some lavish hand might have strewn the water with gems. Sweeping by, in classic shapes, are the smaller jelly fishes; crystal vases, moon-shaped bodies, so delicate that the rich tone of the ocean can be seen through them, then changing their colors to steely blue. Some are mere specters, a tracery of lace; others rich in colors and flaunting long trains. Now the glass floats over a giant four or more feet in length, its body white, blue, with dark chocolate lines radiating upward, while from below swing magnificent coils and flutings, the tail of this living comet that has been seen in Avalon Bay nearly thirty feet in length with a disk nearly two feet across, calling to mind the giant jelly seen by Louis Agassiz that was 125 feet long. Nearly all these pellucid craft move by slow flapping of the edge of the umbrella-like disk; but here is a jelly, the Physophora, that has a series of pumps by which it shoots along through the water. No more beautiful object can be conceived than this, ablaze with colors—pink, blue, and quicksilver—darting through the azure waters that form the interstices of the floating garden.

As the boat moves out into deeper water the purity of the aqueous sky is evident, as forty feet below the rocks are seen and the dim shapes of kelp leaves faintly outlined beyond. Here large fishes hide—the graceful sheepshead peculiar to the region, the male with enormous red and black stripes, blunt forehead, the lower jaw white. The female is a radiant creature with beautiful eyes and often red, brown, or white, the colors fading in confinement. These fishes are easily drawn near the boat by judicious display of bait and their graceful postures plainly observed.

Now the window is out over deep water to see the passing of a migratory school of barracuda, thousands of long slender pike-shaped fishes all headed in one direction, swimming slowly. Suddenly they disappear,

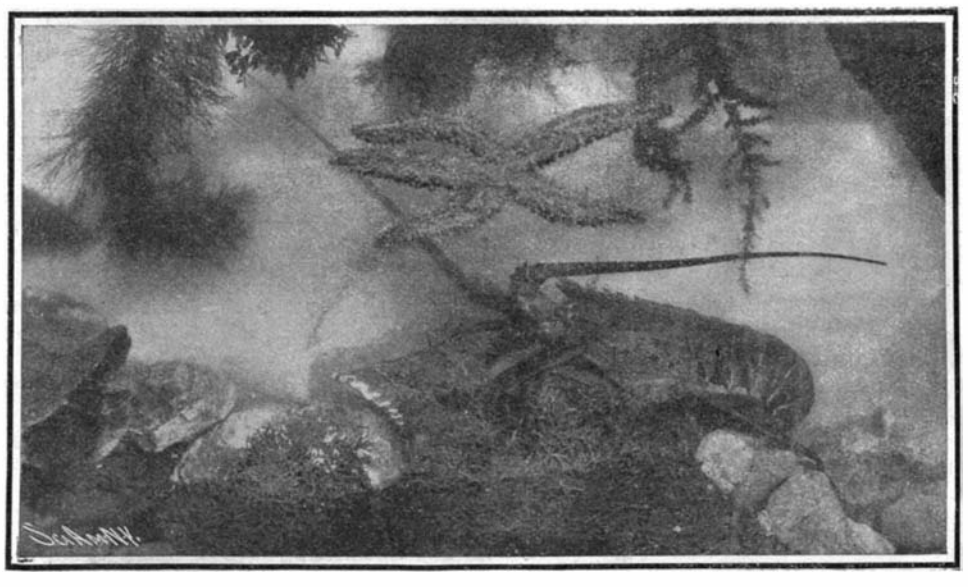

California Crawfish (*Palinurus interruptus*).

THROUGH A WINDOW OF THE SEA.

as though some shutter had been snapped, and onto the field dash a school of large sea bass, the game fish of this locality. Again the window approaches shoal water, and for several miles follows along the fishes' highway, regaling the passengers with an ever-changing panorama of marine scenery. Now it will be a shoal of myriads of blue perch (chromis), a fish that affects the kelp forest, and presents a sharp contrast to it in its vivid blue tint. These fishes delight to bask and sport near the surface, and the window appears full of them as it moves along. Rock bass, singly and in schools, are seen poised in the leaves of the kelp, striped brown and black; spotted rock fish, and here the radiant whitefish, as blue as the water, with long fins, while in the depths other interesting

forms appear, all slightly intensified, magnified by the glass.

In and out, in shallow, where the velvet-like rocks are near the surface; now offshore, following the trail of some vagrant shark, the shallow steamer moves, affording remarkable vistas of the sea and its secrets, and emphasizing the fact that a new method of study has been found in the field of popular science.

Zapon.

The price of shellac, which has been rising for some years, has at the present time reached such an inordinate height that efforts are being made in all directions to find a cheaper substitute. Such efforts, it is true, have so far had negative results, since nothing can entirely take the place of pure shellac, any more than of pure turpentine oil. The finest white shellac especially has been affected by the rise, and its solutions correspondingly; the price of spirits also shows a constant upward tendency, and, in view of the poor potato crops for some time past, we need not hope to see the quotations lowered at present. In this necessity, interest is being aroused in the article called zapon, a product which first appeared about 15 years ago. It makes an excellent coating for all metallic surfaces, German silver, nickel, copper, brass, or aluminium, can also be used on wood or paper, and is a substitute for all the varnishes known under the fancy names of metal varnish, brass varnish, silver varnish, antioxide, etc. Zapon has undoubtedly some advantages over the spirit varnishes; but the consumers are conservative, and, partly, perhaps, for convenience sake, keep to the old ways, and show little enthusiasm for zapon, which, however, is making its way forward, and is bound to have a prosperous future.

Zapon consisted originally of a solution of collodion-cotton in amyl-acetate and acetone, and it may be supposed that the property of collodion which makes it valuable in surgery for excluding air from open wounds, gave rise to the idea of making it the foundation of a sort of varnish. The ultimate constituent of collodion-cotton is cellulose, a substance formed from sugar and starch during the assimilation of matter by the protoplasm of vegetable cells. Pure cellulose can best be obtained from cotton, from which the foreign constituents are removed by extraction with water, alcohol, dilute acids, dilute solutions of potash, and finally with hydrofluoric acid, the object of the latter being to dissolve the silicic acid in the cotton. The residue is again cleansed with water. Filter-paper, in its manufacture, is put through this whole process, and may pass for pure cellulose. Cotton, purified in the way described, with all grease removed, and exposed for a certain length of time to the action of a mixture of one part of nitric acid and two or three parts of sulphuric acid, gives the product called pyroxyline, or gun-cotton, the well-known violent explosive. The cotton for the manufacture of zapon is prepared in the same way, and its structure is unchanged. It is scarcely necessary to observe that this material cannot be prepared by amateurs, but only in chemical works.

Amyl-acetate is the constituent of zapon which gives the agreeable odor of a fruit-essence.

Acetone is a product of the dry distillation of wood, having likewise a pleasant odor, and boiling at 56 deg. C. From a mixture of amyl-acetate and acetone, in the proportion of 18:2, and by the solution of five parts of collodion-cotton, whose chemical name is colloxyline, in one hundred parts of this mixture, zapon is produced. The matter appears simpler than it really is; for not only is work with these materials accompanied with some danger, but the collodion-cotton sometimes obstinately refuses to dissolve, behavior which may be attributed to the manner of preparation. It is advisable for the wholesale consumer to procure from the chemical works concentrated solutions of collodion-cotton in amyl-acetate and acetone, and also the latter dissolving agent separately; the mass may then be diluted as needed. Smaller quantities of zapon may be procured ready for use.

Zapon can also be made from celluloid, since this material consists ultimately of cellulose. Accurately speaking, it is nitro-cellulose and camphor. The solution is made with the usual agents, or with sulphuric ether, and dilution is with amyl-acetate. Ordinary benzine may be added in small quantities, although this affects the quality unfavorably rather than otherwise. All varieties of zapon may be colored with the familiar soluble aniline dyes, and it is advisable to dissolve the dye in a mixture of equal proportions of amyl-acetate and acetone, and add to the zapon when ready for use. Zapon will not amalgamate with earth or mineral colors.

In working up the above described materials, an occasional shimmer of rainbow colors is an indication of too much dilution. This can be remedied by exposure to the air, whereby some of the liquid is evaporated. If zapon, on the other hand, is streaky, flaky, or crumbly, it needs dilution, but spirits must never be used for this. The zaponizing process must be carried on, if possible, in a warm workroom, and where cold metals are concerned, it is well to warm them. A varnish-furnace has the advantage that particles of grease or moisture adhering to the metal are removed at the same time, and cleanliness is a prime condition for the best work. Zapon may be applied to the surface like paint, or the objects may be immersed in it. It dries very quickly. Being very inflammable, it must not be brought near a lamp-flame, or an open fire. The odor is not injurious to health, though at first somewhat irritating to the throat.—Translated from the Farben Zeitung.

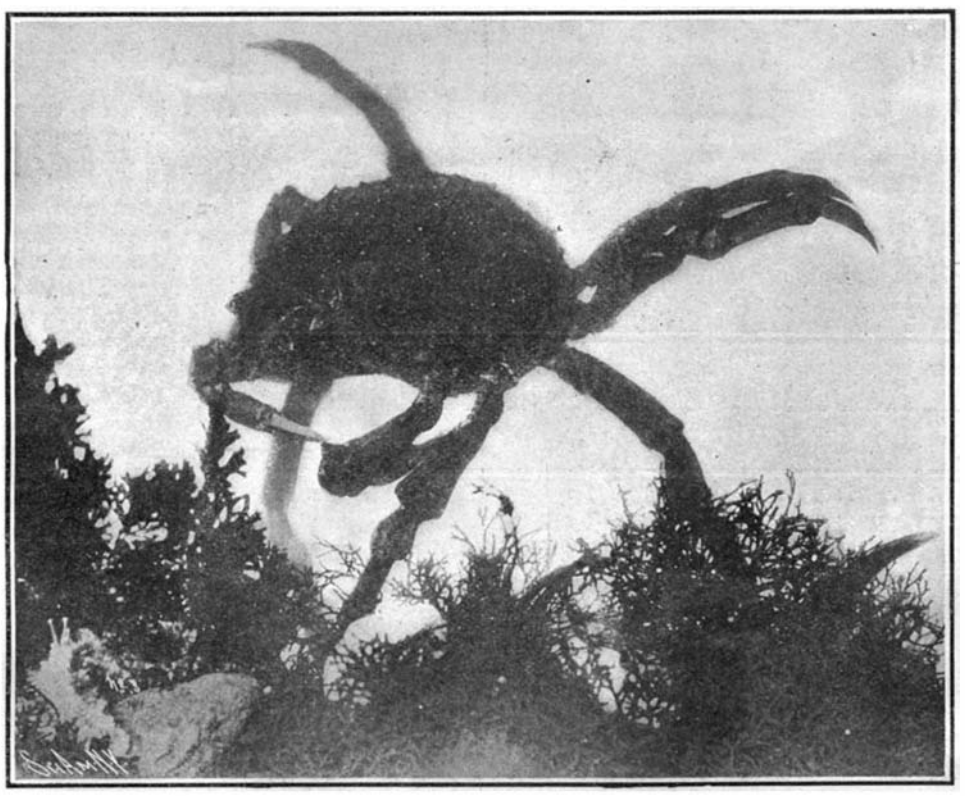

The Giant Spider Crab Dining.

A Large Jelly Fish. Specimens as Long as 30 Feet Have Been Seen.

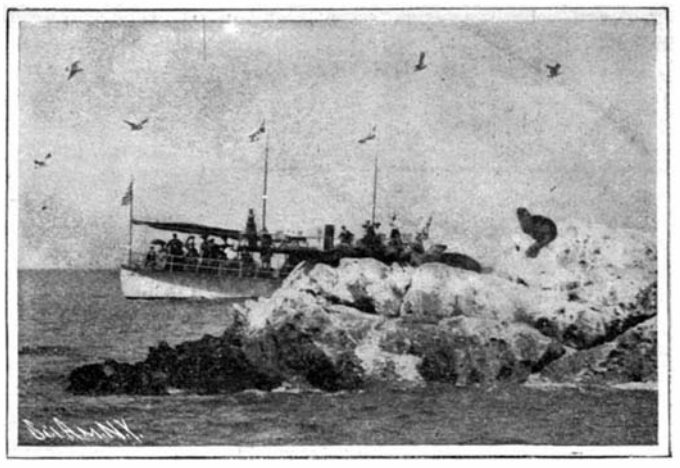

Glass-Bottomed Boat Off Sea Lion Rocks.

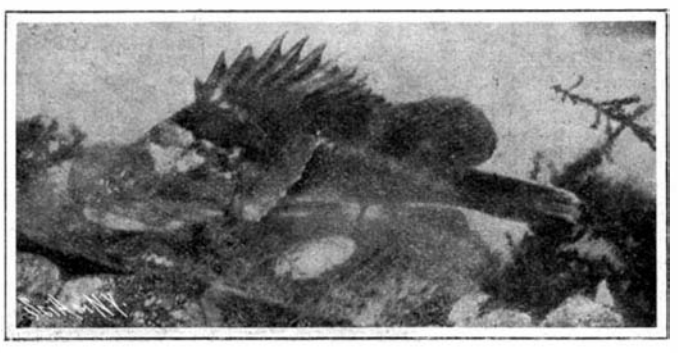

Spotted Rock Fish (*Sebastodes vexillaris*).

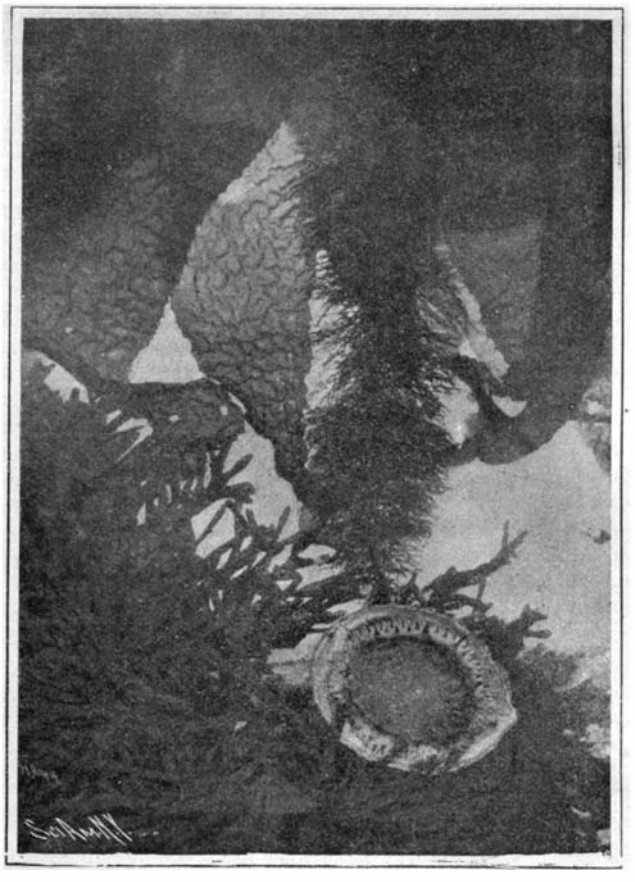

In the Hanging Gardens. A Perfect Scene in the Kelp Beds of Santa Catalina Under Water.

THROUGH A WINDOW OF THE SEA.

There has long been a demand for some arrangement by which the amount of material remaining in a bolt of ribbon or cloth can be ascertained at a glance. As a means of doing this the suggestion was made that a tape be wound up with the ribbon, the tape being marked with inches, feet and yards, but when this was tried, it was found that there was a serious discrepancy in the respective lengths of the two pieces. This difficulty has now been overcome by slitting the paper tape at regular intervals, and passing the ribbon in and out through these slits. This innovation, which is the invention of a Chicago ribbon manufacturer, will not only be of great assistance in the shop, where the ribbon may be measured off in the required quantities without the use of a yard-stick, but will be also found to greatly facilitate the work of stock taking, which in the case of ribbons, cloths, and similar materials is a very tedious operation.

THOMAS A. EDISON AUTOMOBILING TO THE SOUTH.

It is undoubtedly true that the average person evinces as great an interest in the private lives and doings of prominent men as in their public labors and successes. For, naturally enough, a knowledge of the more intimate personal characteristics and a closer view of the life at home, at work, or at leisure appears to bring the celebrity closer to us and to make his achievements appeal the more strongly to the individual.

The accompanying photographs of Thomas A. Edison show the dean of the inventors of America, if not of the world, in situations that are as interesting as they are unconventional. They were taken during a vacation trip planned some time ago and carried out recently. It is not strictly correct to designate this automobile trip as a vacation, for the word vacation is almost unknown to the great electrician whose working days often last for eighteen or twenty hours. And even in this instance the vacation tour was undertaken with a view to study and investigation, and the causes that gave rise to it were these: For the last few years Edison has been working steadily and enthusiastically at his alkaline storage battery, and while he has succeeded in developing a cell that is decidedly superior to the lead accumulator for many purposes, a great deal still remains to be accomplished before his success can be called complete. In the course of his investigations Edison has employed and tested a great variety of different metals, and among these recently was cobalt. As this metal is comparatively rare, and consequently expensive, the inventor has been on the lookout for possible sources of cobalt-bearing minerals which would make it better available for his purposes.

It was reported that cobalt existed in considerable quantities in the neighborhood of Charlotte, N. C., and thereupon Edison dispatched three prospectors to search through this region for the metal. Favorable reports having been received from these investigators, Edison determined to see for himself whether or not the reports were warranted, and so undertook this trip. For several years past the inventor has been an enthusiastic automobilist, and he decided to make the journey from his home in Orange to Charlotte by means of his two White steam cars with which he last year accomplished the Glidden tour, though in a reverse direction from that taken by the various contestants. He strongly favors the steam machine for long and rough trips, and declares that it is far superior to the gasoline car for such purposes.

The party consisted of Edison, his son Charles, and a Mr. Miller, in one car, and two laboratory assistants in the second car. The machine driven by Edison was in the usual condition for touring with tonneau and Cape cart top. The tonneau of the second machine, however, was removed and replaced by a box-like structure in which was packed a complete camping outfit, baggage, provisions, and a small amount of laboratory apparatus for use in mineralogical investigations. Needless to say, provision was made for the repair of almost all possible injury to mechanism or tires. The tourists, of course, encountered tire troubles, but there were practically no difficulties with the engines. That the trip was rather strenuous will be understood by all those familiar with the roads in that section of the South traversed by the tourists. The departure from Orange was made on May 16 and from there the route lay through Philadelphia, Baltimore, Washington, through the Shenandoah Valley, over the mountains across Virginia, into North Carolina to Charlotte. The Shenandoah Valley and mountain trip is one that is not often undertaken, for the roads are usually unspeakable. Edison, however, revels in a tour of this kind and thoroughly enjoyed even the most difficult portions of the journey. Fortunately the weather was uniformly good, and rain and mud were not added difficulties. Gasoline was easily procurable along the route, and no trouble was encountered in supplying the engines with the water available.

Edison is unquestionably one of the most unassuming and democratic of our great men and he makes a splendid companion for such a trip. He sturdily objects to posing for pictures however, and the accompanying photograph of the inventor asleep was taken during a noon rest near Leesburg, Va. It is probably the first of Edison taken under such circumstances. The idea appeals to us as rather novel; our conceptions of Edison are usually of the inventor as very "wide awake." Wherever necessary the tourists camped alongside the road and only availed themselves of hotels or inns where such were reached without trouble. It is not the intent of the party to return in the same manner. The machines will be shipped north, and after a stay of several weeks in the region around Charlotte the party will return by rail.

Copyright 1906 by the Press Photo Co.

Mr. Edison Taking a Nap During a Noon Halt.

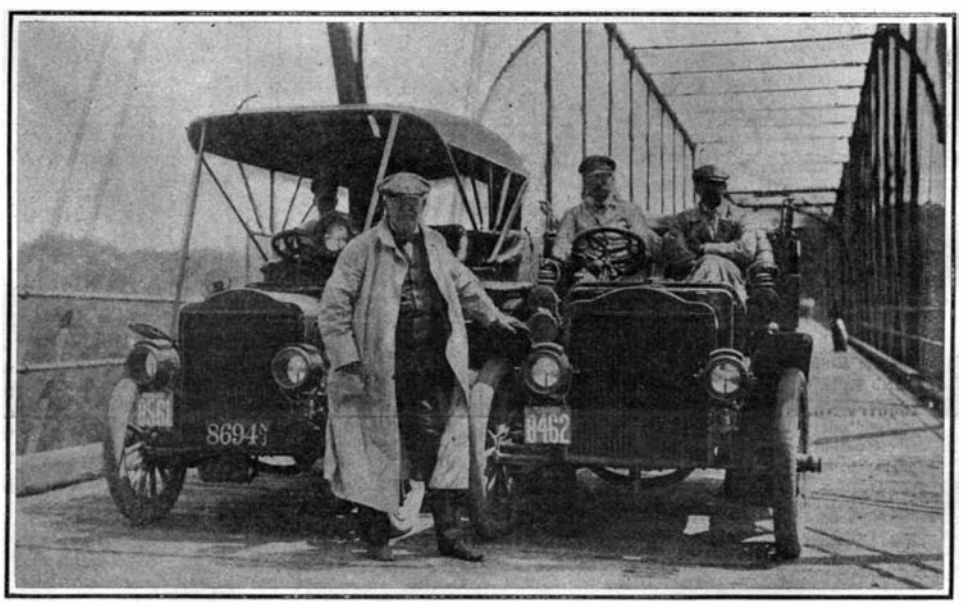

The Press Photo Co.

Leaving Washington by the Chain Bridge

Fresh Air for Miners.

L'Illustration thus describes a new implement for securing this desideratum:

The Society of Mines at Courrières has just undertaken in shaft No. 4 a series of experiments with a new respiratory apparatus called pneumatogen. Every apparatus designed for allowing the stay in a deleterious environment must fulfill three essential conditions: exclusive communication of the respiratory organs with a reservoir of respirable gas; together with a light weight, sufficient capacity of this reservoir to supply a man for a certain time; elimination of the expired carbonic acid, which would poison the pure air. The pneumatogen, which seems happily to realize these three conditions, is based upon the method of the renewal of vitiated air devised several years ago by Mons. George F. Joubert. It consists of an India-rubber bag, worn in front, about waist-high, and supported by a strap passing up one side of the miner's chest, round his neck, and down the other side. Into this bag by means of a mouthpiece he "sends the products of respiration, which are compelled to go through two tubes containing grains of oxylith. The oxylith, or 'stone of oxygen,' has the property of retaining steam and carbonic acid, while setting free a corresponding quantity of oxygen. The vitiated air therefore finds itself renewed when it becomes stored in the bag. The experiments made at Courrières have given excellent results. The miners furnished with the new apparatus have been able to work more than two consecutive hours in shafts where the air was absolutely unrespirable."

Concrete piles of an unusual form have recently been tested in New York. According to the Iron Age they are made by spreading a layer of concrete on wire fabric to which longitudinal rods are attached at intervals. The fabric is immediately rolled up in a special machine of simple construction, and the pile then laid aside to harden. It thus contains, in addition to the fabric, any desired number of vertical rods. In a cross section of the pile the fabric lies spirally from the inside to the exterior of the concrete. If so desired any one of the rods may be made a hollow tube, thus allowing for the use of the water jet.

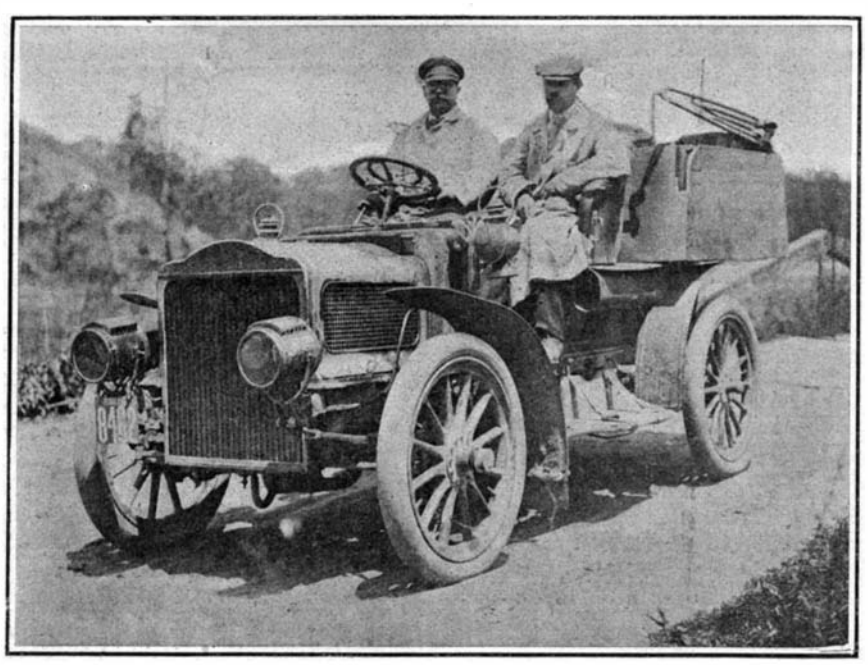

The Press Photo Co.

The Second Car Carrying the Luggage.

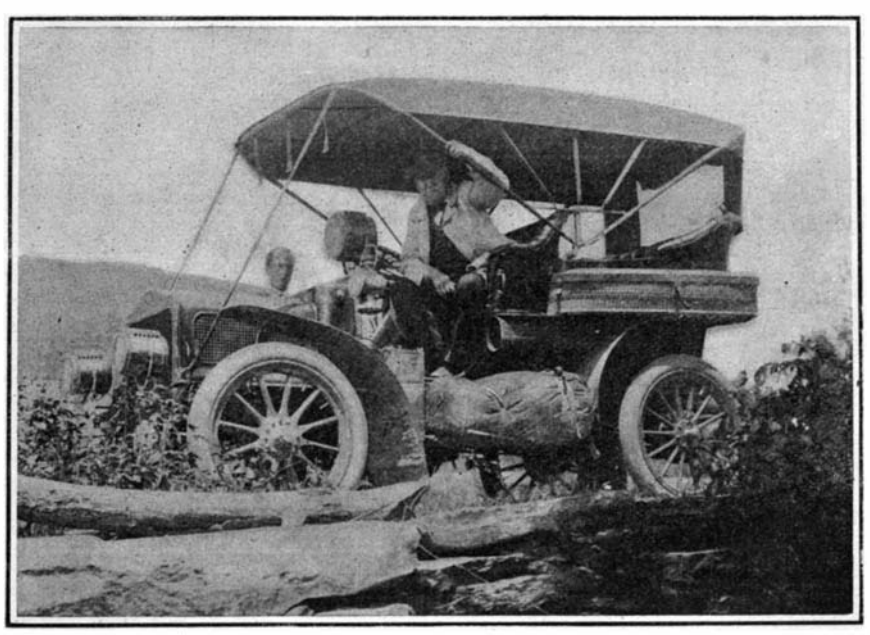

A Stop Near Leesburg, Va.

The Press Photo Co.

THOMAS A. EDISON AUTOMOBILING TO THE SOUTH.

RECENTLY PATENTED INVENTIONS.

Electrical Devices.

TELEPHONE SYSTEM.—C. L. BOYCE, Detroit, Mich. The inventor's objects are to carry out various sub-operations of receiving call-signals, the withdrawal of said signals in due season, and appropriate display and withdrawal of supervisory and disconnecting signals in a highly efficient manner; to dispense with relays in main circuit-conductors of the switchboard; to control the supervisory signals without the use of shunt-circuits, and to provide that the relays concerned in operating the call and supervisory signals of each substation-circuit shall belong to such line-circuit, and independent switchboard circuits, thus aiding in avoidance of faults and facilitating their location and removal.

Of Interest to Farmers.

COMBINED SEPARATOR AND BAGGING DEVICE FOR GRAIN.—T. C. HENNINGER, Markham, Texas. One of the principal objects of the invention is to provide an attachment for threshing-machines through the medium of which grain or other cereals may be taken directly from the machine and the lighter or inferior particles separated therefrom and the heavier or superior particles thereof delivered or loaded into bags or other receptacles therefor.

Of General Interest.

LATHING SYSTEM.—E. NIDDS, New York, N. Y. The invention pertains to lathing systems and more particularly to those employing metal. Its principal objects are to provide a convenient lath and to furnish a simple and strong construction. The system eliminates all auxiliary securing means either for the laths or bars. The invention is equally applicable to segmental arches as to ceilings. In fact, the arrangements in which it may be used are limited only to the capabilities of bending the bars and conforming the lathing.

WINDOW FRAME AND SASH.—R. F. NICHOLS, Oakland, Cal. One purpose of this improvement is the provision of such a construction of window-frame that the window-sashes may be singly or collectively swung within the frame a sufficient distance to enable the outer faces of their panes to be cleaned without the operator leaving the room or leaning from the window.

CONNECTING DEVICE FOR WHEEL-FELLIES.—J. R. HUGHES, Chama, New Mexico Ter. In the form of the improvements in this invention a specially-constructed device is employed for the adjacent ends of the sections of the felly or wheel-rim, comprising complementary ferrules or caps, each of special construction, and co-operating with the other in the production of a close joint between the sections, which is highly resistive to strains from all directions, besides preventing splitting of the sections.

GARMENT-SUPPORTER.—H. P. COULTER, Philadelphia, Pa. In this instance the invention pertains to improvements in devices for attaching suspenders and drawers to trousers, the object being to provide a fastener to be used in place of the usual buttons, the device being so constructed that it may be easily and conveniently secured in position.

COLLAR-SUPPORTER. — MARGUERITE CONNELL, New York, N. Y. This supporter for lace collars or collars made from thin material is simple and economic of construction and capable of being expeditiously and conveniently applied to the collar or removed when the collar is to be washed. It will hold the most flimsy collar in an upright position, but will not cause discomfort to the wearer, injure the collar, or be visible when the collar is worn, even though considerable open-work is a feature of the collar.

Hardware.

COMBINATION-TOOL.—J. P. MCGINNITY, New York, N. Y., and E. H. WINKLER, Krebs, Indian Ter. The purpose of this improvement is to simplify the construction of a combination-tool, especially one which combines the functions of a brace and a wrench; and a special object is the provision of means for securing the handle of the brace to the spindle thereof when the handle is being used in connection with the wrench.

Pertaining to Recreation.

AMUSEMENT APPARATUS.—C. D. BUNNELL, New York, N. Y. It is sought in this improvement to provide a wheel with certain peculiarly-arranged elements, causing a car or other vehicle to be raised by the rotation of the wheel from the bottom periphery thereof upward to its center and thence by means of a switch to have its movement reversed and gradually lowered from its center back to the lower periphery of the wheel, which operation is carried on solely by the rotation of the wheel and coaction of said peculiar elements with the car or other vehicle referred to.

GAME APPARATUS.—W. SANDBERG, Chicago, Ill. The invention refers to game apparatus, its principal objects being to provide an entertaining game in which the ball is delivered from a chute and directed in transit over a ribbon against pieces or ten pins placed in position on a support, in the successful playing of which considerable skill may be displayed. The apparatus though separable from the table upon which it is mounted is adapted to be knocked down into compact shape for storing away.

Pertaining to Vehicles.

VEHICLE-BRAKE.—J. W. SMITH, Congress, Arizona Ter. The invention refers to improvements in brakes for vehicles, such as road-wagons, trucks, and the like, the object being to provide a brake of simple construction, that may be easily adjusted to a vehicle, that may be readily applied by suitable pressure to the rear wheels, and having no parts liable to get out of order.

WAGON-TOP.—J. POHLIG, New Orleans, La. There is provision in this invention for a simple and convenient means for operating and adjusting side curtains to serve as sunshades or to entirely close the sides, the operating devices being so constructed as to be readily attached to any form of delivery or similar wagon.

VALVE.—A. L. MOSS, Sandusky, Ohio. This new valve is more especially designed as a controller-valve or check-valve, for controlling the passage of compressed air or other fluid, and when closed being capable of holding a fluid pressure exceeding, say, sixty or seventy pounds, for a long period and without danger of leakage, thus rendering the valve exceedingly efficient for use in pneumatic sanding devices for automobiles and the like as shown and described in Letters Patent of the United States recently granted to Mr. Moss.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**

MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 8120.—For address of the U. S. Cutlery Co.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 8121.—For manufacturers of a soldering iron with the gasoline tank in the handle.

Handle & Spoke Mchy. Ober Mfg. Co., 10 Bell St. Chagrin Falls, O.

Inquiry No. 8122.—Wanted, manufacturers of rotary, gas, gasoline and oil engines and turbines.

I sell patents. To buy, or having one to sell, write Chas. A. Scott, 719 Mutual Life Building, Buffalo, N. Y.

Inquiry No. 8123.—For manufacturers of machinery that grinds leather scraps into a pulp; also manufacturers of leather door knobs.

Metal Novelty Works Co., manufacturers of all kinds of light Metal Goods, Dies and Metal Stampings our Specialty. 43-47 S. Canal Street, Chicago.

Inquiry No. 8124.—For manufacturers of small screws and nuts, such as used in scissors and shears.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Machine Company. Foot of East 138th Street, New York.

Inquiry No. 8125.—For manufacturers of an instrument called the Automatic Telegraph Transmitter.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery tools, and wood fiber products. Quadriga Manufacturing Company, 18 South Canal St., Chicago.

Inquiry No. 8126.—For manufacturers of a machine for moving sand and shavings.

Automobile experts are in constant demand at high salaries. Our seven weeks' course is the most thorough and practical fitting men to drive, handle and repair. Day and evening classes. Special course for owners. New York School of Automobile Engineers, 146 West 56th Street, New York.

Inquiry No. 8127.—For manufacturers of positive rotary air compressors, delivering from one to five pounds pressure.

WANTED.—The partial services of several men who have facilities for observing, and ability to comprehend the performance and good features of different automobiles. The work will occupy little time, and be chiefly in the nature of correspondence. Address Thomas B. Jeffery & Company, Kenosha, Wis. Department of Construction.

Inquiry No. 8128.—For manufacturers of clock systems, consisting of one master clock controlling any number of secondary clocks.

Inquiry No. 8129.—For manufacturers of novelties and specialties suitable for selling to canvassing agents

Inquiry No. 8130.—For manufacturer of Edison's patent electric rat trap.

Inquiry No. 8131.—For manufacturers of repairs for the Curtis & Mitchell foot power printing presses.

Inquiry No. 8132.—For manufacturers of a cheap substitute for celluloid.

Inquiry No. 8133.—For manufacturers of dairy machinery for making butter and cheese, capacity 10,000 liters of milk.

Inquiry No. 8134.—For parties installing incubators of different sizes, capacity 2, 5 and 10,000 chickens.

Inquiry No. 8135.—For parties installing large drying chambers of the most perfect kind for drying fruits, with a capacity for a very large number of fruits.

Inquiry No. 8136.—For manufacturers of grinding mills for preparing flour, barley, oats, malt, peas, lentils, beans, maize, etc.

Inquiry No. 8137.—For manufacturers of small looms and mechanical spinning machinery for preparing silk fabrics, etc.

Inquiry No. 8138.—For manufacturers of small looms and mechanical spinning machinery for preparing hemp, jute, linen, ramie, etc.

Inquiry No. 8139.—For parties installing machinery on a large scale for preserving fruits and vegetables, such as asparagus, tomatoes, green peas, peaches, pears, apples, grapes, etc.

Inquiry No. 8140.—For parties installing machinery for drawing oil from peanuts, almonds, olives etc.

Notes and Queries.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(9991) R. W. asks for a rough method of estimating the horse-power of a steam engine. A. Multiply the square of the diameter of the cylinder in inches by 0.7854, and this product by the mean engine pressure, and the last product by the piston travel in feet per minute. Divide the last product by 33,000 for the indicated horse-power. In the absence of logarithmic formulæ or expansion table, multiply the boiler pressure for ⅝ cut-off by 0.91, for ½ cut-off by 0.85, ⅜ cut-off by 0.75 3-10 cut-off by 0.68. This will give the mean engine pressure per square inch near enough for ordinary practice, for steam pressures between 60 and 100 pounds, always remembering that the piston travel is twice the stroke multiplied by the number of revolutions per minute.

(9992) B. J. W. asks for information concerning India-rubber production. A. India rubber is the product of many euphorbiaceous plants. We get most of it from the Brazils and Central America. In Brazil it is obtained from the *Siphonia elastica,* which grows to a height of between fifty to sixty feet, and in Central America it is obtained from *Castilloa elastica.* Most of that we now use comes from Central America, where the juice is simply collected into cups, from incisions made in the bark. To coagulate the milky juice and convert it into rubber fit for exportation, the juice of a vine called achuca is mixed with it, and so powerful is its action that five or six minutes is sufficient to produce coagulation. The Brazilian method slightly differs. The juice is first collected in clay bowls, it is then smeared over various shaped molds, made also in clay and taking the form of bottles, balls, spindles, etc. Successive coats are laid on, each one having previously been allowed to thoroughly dry, either in the sun or the smoke of a fire, which blackens it. When a sufficient thickness is obtained, the clay is washed out, leaving the India rubber ready for exportation. The trees yield twenty or thirty gallons of juice, and when we consider that each gallon will produce two pounds of market India rubber, the harvest is not so bad. Other trees producing caoutchouc are *Siphonia brasiliensis, S. lutea* and *S. brevifolia.*

(9993) H. B. asks for a formula for insulating material. A. Linseed oil, 2 parts; cotton seed oil, 1 part; heavy petroleum, 2 parts; light coal tar, 2 parts; Venice turpentine, ½ part; spirits of turpentine, 1 part; gutta percha, 1-6 part; sulphur, 2 parts; heat the oils separately to about 300 deg. F.; cool to 240 deg., and mix in the other materials, the sulphur last. Heat to 300 deg. F., for about an hour or until the mixture becomes pasty, and on cooling is soft and elastic.

(9994) M. D. says: I have lately bought a slide rule, and not knowing how it works I thought you could explain its operation. A. The slide rule is a graphical logarithm table. If you understand the use of logarithms, you ought to be able to work out the principles of the slide rule. When we wish to multiply two numbers, we add together their logarithms and find the number corresponding to the sum. Thus if we wish to multiply 4 by 1 5/10, we add together



on the slide rule the distances *a* and *b*. The sum is *c*, which corresponds to 6. If we wish to multiply 2 by 4, we add together *a* and *d*. The sum is *e*, and number corresponding is 8. The slide rule takes no account of the decimal point. The person using it is obliged to keep track of this in his head, and add to the figures given by the slide rule whatever ciphers may be needed to make the decimal point come in the right place. For more definite information we would refer you to the booklets published by the dealers in slide rules.

NEW BOOKS, ETC.

STEAM TURBINES. Their Development, Styles of Build, Construction, and Uses. By Wilhelm Gentsch. Translated from the German by Arthur R. Liddell. New York: Longmans, Green & Co., 1906. 8vo.; pp. 375; 637 figures; 19 plates. Price, $6.

It is not only the technical men who are concerned with the progress and development of the steam turbine, but a keen interest is also manifested by the general public as well. Unfortunately, the majority of works on this subject, by reason of their free use of mathematics and technical terms, are much too involved to be of interest to the lay reader. It is with the special purpose of meeting the needs of the non-technical man that the present volume on steam turbines has been written. The work is very complete, every typical turbine being fully described, but in so simple a manner as to be intelligible to all. So complete is the work, that it will be of great value to the specialist as well as to the layman. The book opens with a brief historical sketch of the steam turbine. The subject is then dealt with under the following divisions: Pressure Turbines; Velocity Turbines; and Combined and Velocity Turbines. Following this are a number of chapters which cover various constructional details and special features of different turbines. Finally, there is a chapter on Steam Turbines for Dynamos, another chapter on Turbine Pumps and Blowers, another on Steam Turbines for Land Vehicles, and a final chapter on Turbines for Use on Shipboard.

CONCRETE-BLOCK MANUFACTURE. Processes and Machines. By Harmon Howard Rice. New York: John Wiley & Sons, 1906. 8vo.; pp. 152; 46 half-tone cuts. Price, $2 net.

Notwithstanding the tremendous advances which have been made within recent years in the concrete industry, the literature on the subject is still comparatively limited. This book will be welcomed by many interested in concrete and its uses as practically the first which treats the subject in a comprehensive and painstaking manner. The author discusses concrete, cement, aggregates, water, and other ingredients for blocks, and explains the methods of proportioning and mixing them. Other phases of the question, such as general processes of manufacture, are given due weight in various chapters. However, the book unfortunately does not state in a sufficiently definite manner that the entire industry is at present in a rather formative condition, that almost all of the questions involved are still open to discussion, and that many diverse opinions are held by different experts.

MARINE BOILERS. Their Construction and Working, Dealing More Especially With Tubulous Boilers. Based on the Work of L. E. Bertin, late Chief Constructor of the French Navy. Translated and edited by L. S. Robertson. New York: D. Van Nostrand Company, 1906. 8vo.; pp. 658; 350 illustrations. Price, $5.

Notwithstanding the large number of really excellent books covering the subject of the marine boiler at present available, this volume can be incorporated with advantage in any technical library. M. Bertin's recognized standing as a naval engineer, both here and abroad, would alone be sufficient to command consideration for his work; but the intrinsic value of the book itself really makes this unnecessary. The marine boiler is treated in the greatest detail; and while mathematical discussions are avoided as far as possible, this is not done at the expense of the theoretical side of the subject. The illustrations are up-to-date, and will be found of great value in the perusal of the text.

SHAFT GOVERNORS. By W. Trinks, M.E., and C. Housum. New York: D. Van Nostrand Company, 1906. 32mo.; pp. 97. Price, 50 cents.

Notwithstanding the extensive use of the shaft governor for nearly a quarter of a century, the discussions in technical literature of this very useful mechanism are altogether too limited. The book is really the result of collections of notes and rules used by the authors in the design and adjustment of engines, and it relates to the statics of shaft governing alone. The volume does not completely fill the want in various text-books on engine design, as far as shaft governors are concerned, but students and engineers in practice will find many valuable suggestions within its pages. A revised and enlarged edition would seem advisable; for not only is the space too limited, but there are numerous typographical errors to be corrected.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending

May 22, 1906.

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Advertising apparatus, Walton & Rogers.... 821,146
Air compressor and the like, A. J. Lavoie.. 821,299
Alcohol burner, J. H. Ernst 821,406

Alloy, copper, G. Chaudoir, Jr..... 820,954
Amalgamator, A. G. Macdonell..... 821,108
Amusement apparatus, T. A. & T. H. Fulton..... 821,409
Armature winding, C. P. Steinmetz..... 820,997
Automobile, E. P. Brewer..... 821,154
Baby jumper, J. M. Nunamaker..... 821,116
Back pedaling brake, A. P. Morrow..... 821,522
Badge, N. Stafford..... 821,547
Bag clasp, W. H. Slattery..... 821,318
Bag holder, E. A. Hale..... 821,237
Baking pan, E. Katzinger..... 821,104
Balance, automatic electrical, W. Dworzynski..... 821,475
Balanced engine, H. L. Towle..... 821,553
Baling apparatus, F. P. Ellis..... 821,405
Banjo dulcet attachment, N. Howard..... 821,494
Barge, steel, M. G. Hilpert..... 820,974
Barrel heater, Holmes & Beugler..... 821,591
Basket, H. O. Wilcox..... 821,010, 821,074
Battery. See Storage battery.
Bearing, ball, J. N. Petersen..... 821,057
Bearing, ball, R. Conrad..... 821,461
Bearing, end thrust, J. A. Perkins..... 820,986
Bearing for rock drills, T. E. Adams..... 821,325
Bearing, roller, T. M. Worrell..... 821,322
Bedstead, F. R. Brown..... 820,951
Bedsteads, caster socket for metallic, W. C. Fischer..... 821,585
Bee feeder, M. Kegerreis..... 821,246
Beer glass tray, F. Voss..... 821,208
Belt, conveyer, G. C. Plummer..... 821,121
Belt coupling, R. Cannan..... 821,086
Belt shifter, E. A. Muller..... 821,181
Benzoyl succinyl peroxid and making same, A. C. Houghton..... 821,291
Bicycle driving mechanism, chainless, J. S. Copeland..... 821,340
Billiard table leveling and holding device, J. C. Dozier..... 821,225
Binder, temporary, F. W. Reindel, reissue. 12,489
Binding post, electric, W. E. Dow..... 821,029
Block, A. B. Tarbox..... 820,999
Blowpipe, C. Picard..... 821,188
Boat, submarine, E. Niehoff..... 821,595
Boiler tube cleaner, C. L. Charvat..... 821,087
Bolster, body, T. M. Gallagher, reissue.... 12,486
Bolt retaining device, D. S. Kohler..... 821,297
Book trimmer, A. Bredenberg..... 821,080
Boot and shoe cleaner, F. L. Rolph..... 821,193
Bottle, J. W. McGowan..... 821,114
Bottle, E. W. Austen..... 821,579
Bottle closure, C. Hammer..... 821,488
Bottle, non-refillable, Gheen & Maucher... 820,966
Bottle, non-refillable, J. P. Stendebach.... 821,598
Bottle or similar washing apparatus, O. Vogel..... 821,005
Bottle stopper, H. Bogelmann..... 821,456
Bowling alley pin setter, J. C. Backus.... 821,276
Box, P. H. Larkin..... 821,298
Bracelet, F. Fetting..... 820,963
Brake, R. L. Alcorn..... 821,211
Brake shoe, W. P. Taylor..... 821,000
Brake shoe, Cordrey & Brady..... 821,462
Branding machine for casks, cases, and the like, J. Ingle..... 821,039
Bricks, etc., device for cutting and setting, F. Beyer..... 821,453
Bridle bit, P. H. Flynn..... 821,033
Brush, W. H. Bennett..... 821,078
Brush, folding, M. H. Tupper..... 821,320
Buckle, L. M. Kenton..... 821,170
Building block lifter, molded, A. M. Balzer 820,946
Building material, composition, Z. B. Taylor..... 821,550
Cabinet, T. A. Ferris..... 821,350
Cabinet, kitchen, Hurt & Craig..... 821,167
Cabinet, kitchen, O. Goodwin..... 821,481
Cam, sectional, J. J. Hervey..... 821,038
Cameras, telescopes, and other scientific instruments, stand for photographic, W. Butler..... 821,335
Cannon, E. J. Blood..... 821,331
Car bumper, pneumatic concrete steel, T. McCormick..... 821,524
Car conductor, electric, F. L. Sessions.... 821,317
Car construction, E. M. Erb..... 820,961
Car construction, J. C. Herrmann..... 821,490
Car, convertible, J. K. Cothern..... 821,464
Car coupling, J. W. Robertson..... 821,539
Car coupling, automatic, E. King..... 821,505
Car coupling unlocking means, C. H. Tomlinson..... 821,204
Car draw bar centering device, railway, T. R. Brown..... 821,084, 821,085
Car, dump, S. Otis..... 821,528
Car fender, H. Ekrem..... 821,346
Cars, gate opening mechanism for railway, W. S. Wright..... 821,273
Cars, traction increasing device for street, H. H. Fox..... 821,352
Carbid feeder, O. M. Brauer..... 821,332
Carbureter, P. H. Brennan..... 821,081
Carousal, water, Pasterla & Testi..... 821,060
Carriage spring, child's, W. Diemer..... 821,472
Case. See Display case.
Casement for swinging closures, tight and noiseless, S. W. Funk..... 821,353
Cash carrier apparatus, D. E. Chism..... 820,955
Cement, armored, P. Zucco..... 821,569
Cement burial vault, G. B. Okey..... 821,185
Chair guard, I. Unger..... 821,388
Chair iron, J. E. Gilson..... 821,034
Channel pins, machine for manufacturing, H. H. Vaughan..... 821,556
Checking or unchecking device, C. J. Castera, Jr..... 821,216
Cheese cutter, A. C. La May..... 821,175
Cheese, making, Buskist & Mutter..... 821,334
Cigar bunching machine, A. Gordon..... 820,968
Cigar tip cutter, E. Walker, reissue..... 12,487
Circuit breaker, E. W. Gough..... 821,586
Clevis, H. Kruse..... 821,511
Clock, self-winding electric, B. Tropp..... 821,140
Clutch, J. Y. Evans..... 821,091
Clutch, F. M. Ashley..... 821,212
Clutch, magnetic, H. H. Cutler.... 821,020, 821,022
Clutch, magnetic, G. A. Damon..... 821,024
Clutch mechanism, B. J. Abbott..... 821,570
Coffee percolator, A. A. Warner..... 821,445
Collar for personal wear, J. & J. Thompson 821,443
Collar stand or support, W. Delf..... 821,026
Concrete brick machine, G. W. Dy Arman.. 821,031
Concrete walls, means for constructing, C. H. Bellars..... 821,277
Contact substances used for catalytic action, treating, I. Kitsee..... 821,042
Control system, multiple unit, Harding & Clark..... 821,287
Cooler, J. O. Daughtry..... 821,469
Cooling apparatus, D. M. Livingston..... 821,422
Cooling tower, Wheeler & Pratt..... 821,561
Copper and other values from certain ores, recovering, T. J. Lovett..... 821,516
Core drill, J. M. Smith, et al..... 821,130
Corn turner, J. Moran..... 821,369
Corset, bathing, K. Hatch..... 820,972
Cotton, ginning, G. A. Lowry..... 821,423
Couch, M. J. Buckley..... 821,333
Cow tail fastener, G. H. & E. C. Coit.... 821,222
Crane, hoisting, M. F. Berry..... 821,399
Crane, overhead traveling, C. L. Taylor.... 821,136
Cream separator, centrifugal, Z. L. Truesdell..... 821,554
Crushing or pulverizing apparatus, W. Kitto 821,421
Cultivator, W. L. Paul..... 821,119
Cultivator, G. W. & C. E. Goss..... 821,235
Cultivator, straddle row, A. C. Walter.... 821,145
Cultivator, sulky, E. R. Brookbank..... 821,083
Currycomb, J. Q. & J. M. Adams..... 821,075
Curtain rod, T. C. Richards..... 821,377
Cyanogen compounds, production of, C. Bosch..... 821,457
Damper, C. L. Wagandt..... 821,209
Dash pot, S. P. Wilbur..... 821,073
Dash pot, time limit, W. B. Potter..... 821,431
Dehorning gate, M. H. Bidwell..... 821,454
Delinting machine, R. Derdeyn..... 820,957
Dental swaging apparatus, F. L. Argall.... 821,150
Dish washing apparatus, C. B. Miller..... 821,250
Dish washing machine, Kitchell & Swanson 821,105
Display case, J. E. Allison..... 821,573
Display device, G. R. Steinhauser..... 821,067
Display device, F. F. Hough..... 821,242
Display device, rotatable, M. Herskovitz... 821,240
Display rack, J. D. Walsh..... 821,144
Distillery slop and making same, desiccated, G. F. Ahlers..... 821,326
Distilling coals and other hydrocarbonaceous substances, apparatus for, H. Wurtz..... 821,323
Dock, floating, Mehlhorn & von Klitzing... 821,110
Door opening mechanism, C. A. Bell..... 820,949
Door or panel for lockers, metallic, R. W. Jefferis..... 821,102
Door, window, and the like, W. W. Taylor..... 821,201
Douche apparatus, C. P. T. Roux..... 821,259
Draft equalizer, H. T. Railsback..... 821,433
Drawer and the like, sheet metal, I. H. Athey..... 821,578
Drawer for filing cabinets, drop front, I. H. Athey..... 821,577
Drawers and the like, construction of, I. H. Athey..... 821,576
Drawing roll, C. Mills..... 820,982
Dresser reel tension device, A. B. Taplin.. 821,549
Drill. See Core drill.
Drill for drilling holes in rock or the like, J. H. Thomas..... 821,202
Drilling attachment, automatic chain feed, J. S. Dikeman..... 821,473
Drilling, reaming, and broaching, jig for, W. H. Froggatt, Jr..... 820,965
Drinking fountain, B. F. House..... 821,493
Duster, feather, J. E. Snevely..... 821,131
Dye and making same, blue sulfur, C. Ris..... 821,378
Dye and making same, rhodamin, H. A. Bernthsen..... 821,452
Easel, C. T. Springman..... 821,132
Electric conductors, composition of matter for, W. G. Clark..... 821,017
Electric machine, dynamo, F. Sieber..... 821,064
Electric machine, dynamo, R. Lundell..... 821,249
Electric machines and the like, brush holder for dynamo, Speirs & Frith..... 821,197
Electric switches, system and apparatus for operating, H. P. Ball..... 821,077
Electrical step-by-step controller, H. H. Cutler..... 821,021
Electrically operated fountain, A. D. Southam..... 820,996
Electromagnets, retarding device for, P. Kennedy..... 821,504
Elevators, tumbler for bucket, J. H. Gray. 821,163
Embossing press, A. Bredenberg..... 821,079
End gate and lifting jack, combined, O. Bucklin..... 821,458
Engines, actuating gear for traction, F. T. Flinchbaugh..... 821,477
Engines, automatic steering device for traction, E. F. Piper..... 821,253
Engines, device for facilitating the removal of valves from valve boxes of internal combustion, G. J. E. Alphandery.. 821,149
Engines, relief for explosive gas, P. P. G. Hall, Jr..... 821,410
Envelop, Gregg & Williams..... 821,484
Envelop feeding, moistening, and sealing machine, automatic, J. Johnston..... 821,501
Envelop machine folding mechanism, B. Pahlitzsch..... 821,529
Excavating apparatus, P. H. White..... 821,271
Excavating machine, J. Helm..... 821,413
Exercising apparatus for children, S. E. Wiltse..... 821,391
Explosive engine, J. M. Morrison..... 821,370
Fastener, F. R. White..... 821,006, 821,007
Fence, C. E. Frizzell..... 821,232
Fence machine, wire, I. N. Morford..... 821,112
Fence post, C. C. Dolan..... 821,474
Fence post, W. M. Perkins..... 821,535
Fertilizer distributer, Hamilton & Linker. 821,485
Fiber cleaning machine, W. A. Adams.... 821,571
Fiber reducing machine, H. S. Albrecht, 821,447, 821,448
File cabinet, I. H. Athey..... 821,575
Filling machine, F. M. Peters..... 821,186
Filter, F. K. Kreutz..... 821,173
Filter, F. B. Hinkson..... 821,360
Filter, S. B. Stewart..... 821,442
Filter bed cleaning apparatus, H. W. Blaisdell, reissue..... 12,488
Filter, water, A. G. Sheak..... 821,194
Fire alarm, automatic, J. W. Griffin..... 821,098
Fire alarm system, Beane & Bennett..... 821,581
Fire hydrant, R. M. Pringle..... 821,191
Firearms, telescopic sight for, A. Swasey. 820,998
Fish hook, W. A. Scott..... 821,544
Floor scraper, A. O. Nordquist..... 821,525
Flooring, stable, A. G. Hupfel..... 821,417
Fluid pressure regulator, A. Andrews.... 821,574
Fluids in cities, controller for distribution of, F. J. Foveaux..... 821,160
Flush tank operating device, B. O. Tilden. 821,002
Flushing apparatus, C. H. Colvin..... 821,282
Flying machine, O. & W. Wright..... 821,393
Folding seat and step, C. N. Hazelton.... 820,973
Force feed lubricator, C. W. Manzel..... 820,979
Forging machine, T. C. Prouty..... 821,059
Fruit for transportation, means to cure, J. P. Triolo..... 821,205
Furniture attachment, J. C. Condo..... 821,338
Furniture, combination, J. Fedran..... 821,349
Game, E. H. Enos..... 821,476
Game apparatus, C. A. Miller..... 821,111
Game apparatus, Fatkin & Ertzman..... 821,348
Game, card, J. G. A. Fortier..... 821,229
Garbage can, I. Hirsohn..... 821,241
Garment clasp, J. P. Croasdale..... 821,466
Garment supporters, friction slide for, A. Abizaid..... 821,011
Gas and steam engine, H. B. Nicodemus.. 821,373
Gas apparatus, H. Y. B. Duff..... 820,959
Gas apparatus, acetylene, E. M. Rosenbluth 821,540
Gas cleaner, P. Meehan..... 821,425
Gas generating apparatus, H. B. Rouse... 821,258
Gas generator, acetylene, J. R. Shirreffs.. 820,993
Gas making apparatus, L. P. Lowe..... 821,594
Gear, changeable, Lipe & Brown..... 821,248
Gin saw cleaner, cotton, J. N. Wiggs..... 821,446
Glass cylinders, apparatus for the manufacture of, J. Forster..... 821,478
Glass cylinders, device for capping off, H. F. Hitner..... 821,361
Glass shade, decorative, O. A. Mygatt.... 821,308
Glove fastener, F. R. White..... 821,008
Goods delivering receptacle, J. H. Russell. 821,541
Governor, R. Conrader..... 821,157
Governor, engine, C. Grant..... 821,286
Governors, oil brake for speed, M. Haeberlein..... 821,359
Grading machine attachment, W. E. Leighton..... 821,513
Grain shocking machine, automatic, Schmidt & Champeau..... 821,542
Granular or comminuted nature, apparatus for moving and mining material of a, A. McDougall..... 821,372
Grass killing composition, C. M. Hulsey.. 821,244
Grate, water cooled, A. E. Johnson..... 821,500
Grip device, intermittent, D. E. Lyman.. 821,301
Gun trigger mechanism, K. Voller..... 821,557
Guns, single trigger mechanism for, G. B. Osterhout..... 821,118
Hammer, drop, E. W. Merrill, Jr..... 821,303
Hand wheel, H. J. Wiegand..... 821,272
Harmonica, H. Hohner..... 821,492
Hat blocking machine, C. Eickemeyer..... 821,284
Headlight, adjustable, F. C. Lyon..... 821,047
Heater, S. D. Watson..... 821,269
High chair, I. Unger..... 821,387
Hinge, H. N. Backus..... 821,012
Hinge, multiple stay, W. M. Smith..... 820,995
Hoisting bucket, A. D. Mosby..... 821,523
Hoop driving machine, barrel, E. Holmes, et al..... 821,362
Horse trainer, S. B. Arthurs..... 821,395
Horseshoe, G. B. Paul..... 821,530
Horseshoe calk, O. J. Hennebeul..... 821,414
Hose supporter loop, I. B. Kleinert..... 821,106
Hydrocarbon burner, W. Kemp..... 821,419
Incubator, C. E. Adair..... 821,324
Induction motor, B. G. Lamme..... 821,044
Inhaling apparatus, T. H. Gebauer..... 821,354
Insulator, T. Carter..... 821,401
Ironing wax pad, G. Peetz..... 821,532
Jack, J. W. Hearn..... 821,239
Jar closure, C. C. Parker..... 821,596
Jewel pin and pallet stone setter, O. O. Aune..... 821,396
Journal and lubricator, combined, J. W. Barlow..... 821,450
Journal lubricator, G. Tibbett..... 821,203
Ladders and the like, bracket for step, J. Jackson..... 821,498
Lamp, acetylene gas generating, F. E. Baldwin..... 821,580
Lamp burner, G. Kerr..... 821,171
Lamp, electric, J. T. H. Dempster..... 821,470
Lamp, incandescent electric, H. C. Parker 821,056
Lamp, vehicle, T. J. Corcoran..... 821,224
Latch, gate, M. I. Jackson..... 821,363
Lathe, turret, C. J. Forsberg..... 821,351
Leaf holder, H. V. Wagoner..... 821,142
Leather, oil dressing for, H. Schowalter.. 821,260
Leather scarfing machine, Holmes & Allen. 820,975
Letters or other papers, receptacle for, W. A. Cooke, Jr..... 821,019
Lifter. See Building block lifter.
Lifter, J. E. Chenet..... 821,088
Lifting jack and wire stretcher, A. F. Wilson..... 821,565
Linotype machine, P. E. Kent..... 821,296
Linotype machine attachment, Day & Hubbard..... 821,342
Liquid actuating apparatus, R. Conrader.. 821,339
Liquid distributer, L. Perotti..... 820,987
Liquid purifier, C. Tuckfield..... 821,207
Loader and unloader, M. Hudgens..... 821,243
Lock, V. F. Wallin..... 821,210
Lock, R. Dario..... 821,283
Locomotive exhaust mechanism, Conolly & Herron..... 821,402
Log loader, O. Cheverfield..... 821,089
Loom, P. E. Victory..... 821,600
Loom multiplier mechanism, T. P. Walsh. 821,321
Loom picker sticks, lug strap fastener for, G. E. Prescott..... 821,058
Looms, filling exhaustion indicating mechanism for, C. F. Roper..... 821,123
Lubricating device, D. S. Seymour..... 821,063
Lubricating device, W. H. Procter..... 821,432
Lubricating mechanism, N. A. Christensen. 821,582
Lubricating the barrel wheel bearings of barrel jig mills, apparatus for, E. H. Glanzberg..... 821,234
Lubricator, L. G. M. West..... 821,072
Lubricator, T. L. & T. J. Sturtevant..... 821,266
Machines and parts thereof, connection for, H. Dock..... 821,027
Mail box, O. F. Smith..... 821,440
Mail chute, F. E. Anderson..... 821,275
Manure from peat, producing, C. H. J. Van Haeften..... 821,555
Marker, land, E. L. Brillhart..... 821,082
Marker, land, J. C. Liston..... 821,178
Massage and vibrator machine, electric, S. W. Moon..... 821,180
Match receptacle and igniter, combined, W. Chater..... 820,953
Measuring instrument, electrical, W. E. Laird..... 820,978
Measuring instrument, electrical, A. H. Hoyt..... 821,292
Meat chopper, H. C. Sander..... 820,990
Medical instrument, K. A. Bode..... 820,950
Medicine distributer, C. L. Wells..... 821,389
Merry-go-round museum, J. L. Tidd..... 821,138
Metal working machine, automatic electric, Rietzel & Barstow..... 821,061
Metallic tie, C. Horrell..... 821,166
Milling tool, S. Horr..... 821,290
Miters and octagons, implement for laying out, P. L. Fox..... 821,094
Mixing machine, Swanson & Boyle..... 821,267
Molding machine, G. P. White..... 821,270
Molten baths, apparatus for drawing articles from, G. H. Harvey..... 820,971
Mop holder for brooms, J. F. Doebler, Jr.. 821,344
Motor reverser, automatic, G. H. Whittingham..... 821,009
Multiple cylinder engine, H. E. Smallbone. 821,546
Musical instruments, mounting for keys of, C. Pekat..... 821,533
Musical instruments, pneumatic action for, F. W. Wood..... 821,568
Nail or screw for securing corrugated iron, J. B. Davies..... 821,025
Nasal passages, device for treating the, E. Baum..... 820,948
Necktie, F. L. Hill..... 821,289
Nest, W. M. Bunsen..... 820,952
Nippers, J. N. Nettleton..... 821,183
Nut fastening device, wagon, L. G. Huntley..... 821,497
Nut tapping or screwing machine, J. M. Ralston..... 821,376
Nuts, means for the protection of screw, P. Fewson..... 821,285
Oil burner, I. Hollenbach, et al..... 821,165
Oil cake, apparatus for reducing hot, A. W. French..... 821,095
Oil on dusty roads, means to sprinkle crude, J. F. Blunt..... 821,152
Ore separator, A. Perry..... 821,430
Oscillating piston engine, J. Bergesen..... 821,398
Oyster dredging hoist, P. P. G. Hall..... 821,411
Packages of interfolded sheets, producing, S. Wheeler..... 821,562
Packing machine, J. B. Cornwall..... 821,463
Packing, piston rod, J. H. Hoyer..... 821,100
Pail, minnow, S. A. Jones..... 821,040
Pans, making, E. Katzinger..... 820,976
Paper, watermarking of, W. K. Trotman.. 821,206
Parchment, manufacturing artificial, G. Sachsenroder..... 821,434
Parer, vegetable, W. F. Jetter..... 821,103
Pasteurizer, J. C. Miller..... 820,981
Percolator, G. E. Savage..... 821,124
Percolator, Savage & Chapman..... 821,125
Permutation lock, Streeter & Wallis..... 821,548
Phase splitter, H. H. Cutler..... 821,023
Phonograph, P. Weber..... 821,071
Photographs in natural colors, production of, J. Szczepanik..... 821,200
Piano action, repetition, H. Hauser..... 821,288
Piano actions, rail attachment for, F. G. Billings..... 821,455
Pianos, disappearing pedal for automatic, M. Clark..... 821,460
Picture frame hanger, L. Feldmann, Jr... 821,159
Pile driving machine, C. H. R. Schwarz... 820,992
Piling, metal, J. J. Harold..... 820,970
Pinch bar, E. A. Patterson..... 820,985
Pipe and tube coupling, Wilks & Klaiber. 821,564
Pipe clamp, adjustable, J. J. Meyer..... 821,426
Pipe coupling ring, W. W. Price.821,536 to 821,538
Pipe holder, conductor, T. N. E. Schebler. 820,991
Pipe main testing plug, P. J. Coleman.... 821,223
Plane, cooper's, H. Schneider..... 821,543
Planing machinery, J. R. Thomas..... 821,137
Planters, marker for corn, L. J. Lindsay. 821,593
Planting machine, corn, J. S. Berkey..... 821,451
Plate press, G. Rowden..... 821,380
Plow, Hamilton & Linker..... 821,486
Plow and planter, H. F. Weaver..... 821,070
Plow attachment, G. A. Schultz..... 821,128
Plow draft hitch, gang, R. R. Frey..... 821,231
Plow wheel support, S. & J. Moeller..... 821,520
Plumb bob and rule, combined, R. McDonald 821,371
Polishing machine feed mechanism, J. D. Walsh..... 821,143
Portable bath, D. F. Fowler..... 821,230
Postal service, machine for the manufacture of facing slips for the, J. E. Ray..... 821,122
Potato bagging machine, G. E. Rehberger 821,314
Power mechanism, J. C. Dunkelbarger.... 821,226
Power transmitting apparatus, J. Trainer. 821,003
Press, A. Marshall..... 821,517
Printing press perforating attachment, H. Caton..... 821,217
Propeller wheel, H. J. Perkins..... 821,534
Pulley, J. T. Johnson..... 821,169
Pulley, W. M. Rockwood..... 821,379
Pump, gas, R. Whitaker..... 821,563
Pump motor, oil, A. J. West..... 821,147
Pump motor, oil, W. S. Sherman..... 821,195
Pump motor, oil, Sherman & Richardson. 821,196
Pump rod clamp guide, A. T. Ames..... 821,274
Punch and cutter, belt, P. F. Cohen..... 821,281
Punch bowl, J. Simms..... 821,545
Putty knife and chisel, C. S. Leland..... 821,176
Puzzle, B. S. McCain..... 821,182
Rack, B. L. Jessel..... 821,364
Rafter gage, V. A. Johndro..... 821,168
Rail fastening, G. S. Finkle..... 821,408
Rail fastening device, J. L. Dahl..... 821,467
Rail joint, E. Killing..... 821,420
Rails, device for bridging and uniting, J. D. Kneedler, et al..... 821,508
Rails, securing means for track, J. D. Kneedler..... 821,509
Railway cattle guard, N. Smith..... 821,439
Railway construction, P. Holmes..... 821,592
Railway rail joint support, L. Winans... 821,566
Railway rail stay, H. H. Sponenburg, reissue..... 12,485
Railway signal, J. P. Norwood..... 821,252
Railway signal, J. B. Lineback..... 821,515
Railway switch, E. H. Thorne..... 821,001
Railway switch, H. R. Luther..... 821,424
Railway switch, frogless, J. E. Canham... 821,016
Railway switches and signals, apparatus for operating and controlling, J. D. Taylor. 821,386
Railway switching and signaling apparatus, J. D. Taylor..... 821,385



"Star" Foot and Power Screw Cutting Automatic Cross Feed **Lathes**

FOR FINE, ACCURATE WORK

Send for Catalogue B.

SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N. Y., U. S. A.

Engine and Foot Lathes

MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE

SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati, O.

Foot and Power and Turret Lathes, Planers, Shapers, and Drill Presses.
SHEPARD LATHE CO., 133 W. 2d St. Cincinnati, O.



BRASS OR STEEL

THE CLIPPER CLIP

☞ Its triangular shape prevents entangling and gives three times the capacity of any other Clip for attaching papers together.
Best & Cheapest. All Stationers.

CLIPPER MFG. CO.,
401 West 124th St., New York, U.S.A.
For free samples and information write to us.

Manufacturers should investigate the **B. F. BARNES MACHINE TOOLS** before placing orders. The Tool here illustrated is our 20-inch Drill, and we have many other sizes to make a very complete line, including Multiple Spindle Drills. If interested in the latest Tools for reducing costs of production, let us tell you what we have. Ask for Catalog S.

B. F. BARNES CO. Rockford, Ill.
European Branch
149 Queen Victoria St., London, E. C.

FRICTION DISK DRILL

FOR LIGHT WORK.

Has These Great Advantages:

The speed can be instantly changed from 0 to 1600 without stopping or shifting belts. Power applied can be graduated to drive, with equal safety, the smallest or largest drills within its range—a wonderful economy in time and great saving in drill breakage. ☞ Send for Drill Catalogue.



W. F. & JNO. BARNES CO.,
Established 1872.
1999 Ruby Street, - - Rockford, Ill.



Automatic Machines FOR FORMING WIRE

from coil into shapes similar to cuts. We can furnish machines or goods, as desired.
☞ *Send for Catalogue.*

BLAKE & JOHNSON,
P. O. Box 1054. WATERBURY, CONN.

BARKER MOTORS

Reliable.—1¼ to 10 H. P.—Economical

Their perfect operation and reliability are due to common sense mechanical ideas and good construction. While low in price, they are made of best materials with careful attention to details.



C. L. BARKER, NORWALK, CONN.



MACHINE No. 78.
Range 2¼-4 in. R. H.

For Either **Hand or Power**

This machine is the regular hand machine supplied with a power base, pinion, countershaft, etc., and can be worked as an ordinary power machine or taken from its base for use as a hand machine. Length of pipe handled easily in small room. Illustrated catalogue—price list free on application.

THE CURTIS & CURTIS CO.,
6 Garden St., BRIDGEPORT, CONN.

THE EUREKA CLIP

The most useful article ever invented for the purpose. Indispensable to Lawyers, Editors, Students, Bankers, Insurance Companies and business men generally. Book marker and paper clip. Does not mutilate the paper. Can be used repeatedly. In boxes of 100 for 25c. To be had of all booksellers, stationers and notion dealers, or by mail on receipt of price. Sample card, by mail, free. Manufactured by **Consolidated Safety Pin Co.,** Box 121, **Bloomfield, N. J.**



Size No. 2.



Clearing Sale Slightly Used Typewriters

We own and offer as wonderful bargains, 1,500 typewriters which have been used just enough to put them in perfect adjustment. **Better than new.** Shipped on approval, free examination. 1,000 new *Visible Stoles* machines, built to sell for **$95**—our price while they last, **$45.**

FREE catalogue containing unparalleled list of splendid typewriter bargains. Send for it **to-day.**

Rockwell-Barnes Co., 1059 Baldwin Bldg., Chicago, Ill.

How To Increase Your Business

READ carefully, every week, the **Business and Personal Wants** column in the

Scientific American

This week it will be found on page 461.

Some week you will be likely to find an inquiry for something that you manufacture or deal in. A prompt reply may bring an order.

Watch it Carefully

DAVID CUMMINGS

I have been making shoes for 54 years

and every week-day for the past half-century I have studied hard to manufacture the best-wearing and most comfortable shoes. I now make the

Worth Cushion Sole Shoe

and hundreds of men and women tell me it's by far the most comfortable shoe they ever wore. I make them in up-to-date styles for both men and women, and really believe that for style, comfort and durability they are unequaled by any other shoe.

If your dealer hasn't them, write for illustrated spring booklet, and I will find a way to supply you

Send all orders and correspondence to

The Cummings Co. 406F Washington St., BOSTON



1½ H. P. MARINE ENGINE

$33.50 Engine Only

Engine and Engine Fittings $37.50

For your Row Boat, Sail Boat or Launch

No cranks to start—No cams, valves, gears, springs or sprockets. All working parts in full view. We build all sizes Boat Engines.

DETROIT ENGINE WORKS,

1425 JEFFERSON AVE. DETROIT, MICH.

ELECTRIC LAUNCH MOTOR. — THE design in this paper is for a motor of unusual simplicity of construction, which can easily be built by an amateur at small cost. It is intended for a boat of about 24 feet over all and 4 feet 6 inches beam, drawing 18 inches, and is capable of propelling such craft at a speed of 7 miles per hour. Illustrated with 21 cuts. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1202.** Price 10 cents by mail, from this office and from all newsdealers.

CLINTON, MICH., Dec. 21, 1905.

BRENNAN MOTOR CO., Syracuse, N. Y.

GENTLEMEN:—The 20 H. P. Motor I bought of you three years ago, to run my ice harvester, is a dandy. is simple, easy to control and cheap as to fuel. It

I did my threshing with it, running a large separator, with blower for stacking, and it seemed to run with as much power, if not more, than the large steam engine. Crowds of people came to see the little thing run such a large machine and do the work so easily. It took about three hours to thresh over 400 bushels of grain and we did not stop once.

Any one wanting a motor will make no mistake if they get a



Brennan. Yours very truly, J. B. HAUSE.

BRENNAN STANDARD MOTOR

Mounted with Individual Clutch Gear, also Furnish Sliding Gear Transmisson.

Motors from 6 to 80 Horse Power.

A. W. Faber.

Manufactory Established 1761.

Lead-Colored & Slate Pencils, Rubber Bands, Erasers, Inks, Penholders, Rulers, Water Colors, Improved Calculating Rules.

Send for descriptive Circular S.

44-60 East 23d Street, New York, N. Y.

Grand Prize, Highest Award, St. Louis, 1904.

Baldwin Recoil Check

For Automobiles Makes

"All Roads Ride Alike"

Saves your car and tires and permits of comfortable riding on bumpy roads. Helps your springs on smooth roads. Easily attached to any car. Free Booklet.

BALDWIN CHAIN & MFG. CO.,

200 Chandler St., Worcester, Mass.

Picturesque New England

as reached by the

Boston & Maine Railroad

is beautifully illustrated by the Portfolios entitled

New England Lakes

Rivers of New England

Seashore of New England

Mountains of New England

The Charles River to the Hudson

Picturesque New England (Historic and Miscellaneous)

Size of illustrations, 4 x 6 inches. Will be mailed upon receipt of six cents for each book.

POST CARDS

Set of twenty Post Cards reproducing typical New England Scenery in its natural colors, sent on receipt of thirty cents.

Address PASSENGER DEPARTMENT
Boston & Maine Railroad, Boston, Mass.

D. J. FLANDERS, Gen'l Pass. and Ticket Agt.

Railway switching and signaling apparatus, W. W. Salmon	821,435
Railway switching and signaling apparatus, W. K. Howe	821,495
Railway tie, Broderick & Siber	821,014
Railways, rope grip for suspended rope, A. W. Kutzer	821,174
Range, cooking, M. V. Hammack	821,487
Rat trap, F. Klousnitzer	821,366
Reel, W. E. Wines	821,567
Reflector, decorated shade, O. A. Mygatt	821,309
Reflector for artificial lights, compound, O. A. Mygatt	821,310
Reflector for artificial lights, decorative shade, O. A. Mygatt	821,307
Reflector, prismatic, O. A. Mygatt	821,306
Reflector, prismatic glass, O. A. Mygatt	821,311
Refrigerator, W. M. Keith	821,503
Regenerator or heat exchanging apparatus, Maslin & Theryc	821,518
Rheostat operated by means of compressed air, automatically regulated liquid, C. de Kando	821,418
Rifle and shotgun cleaner, B. E. S. Stocker	821,198
Rivet, W. P. Bartel	821,397
Rocker, base, A. H. Ordway	821,055
Rope drum, T. S. Miller	821,305
Rosette, J. C. Tournier	821,444
Rotary engine, G. E. Anderson	821,449
Rotary kiln, O. Gerlach	821,355
Rubber, dissolving and regenerating, P. Alexander	821,394
Rubber nipples and the like, manufacturing, E. J. Sonn	821,066
Ruler, folding, G. C. Gillespie	821,356
Sack, G. Leue	821,177
Saddle adjusting itself automatically in two directions, C. Szameitat	821,135
Sand blast machine, C. A. P. Hess	821,415
Sash balance, adjustable, E. M. Erb	820,962
Sash, doors, etc., fastener for window, O. A. Dahl	821,090
Sash fastener, window, B. F. Cline	821,337
Sash lock, window, E. J. Glackin	821,097
Sash weight, F. C. Schwedtman	821,316
Saw, H. Grelck	820,969
Saw dressing device, band, H. Johansen	821,293
Scale attachment, weighing, Barry & Shaughnessy	820,947
Scale, weighing, M. H. Hansen	821,035
Scale, weighing, J. G. Blessing	821,214
Scale, weighing, J. E. Cochran	821,220
Scale, weighing, Cochran & Plumtree	821,221
Scale, weighing, J. G. Blessing	821,278
Scenic frame, E. B. Carns	821,156
Scraper, wheeled, W. P. Warren	821,560
Scraping machine, automatic, J. F. Coleman	821,583
Screen. See Window screen.	
Screen, W. O'Byrne	821,429
Screen, J. Keffler	821,502
Screw and nut locking device, Dewect & Griffiths	821,471
Seaming machine, can, J. A. Steward	821,134
Seed and recovering lint, system of delinting cotton, W. A. Ragsdale	821,257
Seed delinting machine, cotton, W. A. Ragsdale	821,254 to 821,256
Sewage ejector, Meyers & Hildebrandt	821,050
Sewing machine, A. E. Miller	820,980
Sewing machine feeding mechanism, C. F. Gray	821,587
Sewing machine feller foot, M. Hoffert	821,491
Sewing machine shuttle actuating mechanism, A. B. Fowler	820,964
Sewing machine speed controller, H. R. Schweinler	821,129
Shade and curtain fixture, C. S. Staten	821,133
Shade fixture, window, W. D. Harper	821,412
Shade roller, window, J. R. Stephens	821,265
Sharpener, disk, G. Gerardy	821,086
Sheets, cards, and envelops, automatic feeding device for, R. E. & A. Kemper	821,601
Shingle bracket, Thompson & Schrader	821,551
Shoe horn, E. R. Mason	821,049
Shoe ironing jack, H. D. Coffman	821,018
Shovels, tooth for steam, Cantlebery & Edwards	821,215
Show or display case, O. Jaeger	821,499
Sifter, flour, H. Mackay	821,109
Sign, automatic changeable, Thomas & Gillette	821,068
Signaling device, N. A. Butler	821,459
Signaling system, W. W. Salmon	821,381
Siphon collar, C. R. Schultz	821,437
Smelting apparatus, ore, J. A. Potter	821,190
Smelting lead-sulfid ores, A. G. Betts	821,330
Smelting ores, J. A. Potter	821,189
Smoke consuming furnace, R. L. Walker	821,268
Smoke machine, G. W. Heiland	821,489
Snatch block, A. F. Wheaton	821,148
Snatch block, N. Ferguson	821,407
Soap feeding machine, R. H. Little	821,300
Sock or stocking, A. Poetzl	820,989
Sole vulcanizing and applying apparatus, shoe, G. F. Butterfield	821,336
Spanner wrench, Churchill & Jones	821,280
Speed mechanism, variable, H. M. Norris	820,984
Speed mechanism, variable, C. F. Pougher	821,597
Spike puller, O. B. Craft	821,404
Spinning and like machine, F. A. Breeze	821,013
Spinning and twisting apparatus, ring, J. Hayden, Jr.	821,238
Sponge and soap cake, combined, R. H. Hutchinson	821,245
Spool or reel, A. H. Olmsted	821,117
Spring support, F. Karr	821,295
Square, S. R. Parks	821,374
Square and miter, adjustable and separable, P. L. Fox	821,092, 821,093
Square attachment, M. Nichols	821,115
Stacker and stacker attachment for threshing machines, pneumatic, S. D. Felsing	821,584
Stacker, hay, J. R. Wright	821,392
Stanchion, C. E. & E. Green	821,588
Stanchion, cattle, R. Brehm	821,153
Station indicator, C. E. Johnson	821,294
Steam boiler, G. H. Barrus	821,327
Steam boiler, J. Tonkin	821,552
Steam boiler, H. W. Wagener	821,558
Steam separator, R. L. Kjerner	821,172
Stethoscope, C. M. Root	821,315
Stitching and embroidery machine, ornamental, F. Gegauf	821,233
Stock and die, M. G. Cornell, Jr.	821,403
Stop-motion for silver lap machines, W. Henry	821,590
Storage battery, T. A. Edison	821,032
Stove attachment, E. F. Head	821,589
Stove, cooking and roasting, F. Glowacki	820,967
Stump puller, hand power, W. J. Fuller	821,479
Surveying bore holes, means for, H. F. Marriott	821,048
Swing, B. Clow	821,219
Switchboard, A. T. Newman	821,251
Synchronizer, M. L. Ballard	821,151
Table, D. H. Allen	821,572
Talking machine, E. Leschbrandt	821,045
Target stickers, device for holding, A. Mount	821,113
Teeth, set of artificial, C. Rauhe	821,192
Telegraphic transmitting device, I. Kitsee	821,043
Telegraphy, electric, I. Kitsee	820,977, 821,506
Telephone selecting device, W. D. Watkins	821,069
Telephone support, W. B. Lehmkuhl	821,247
Telephone system, J. H. Gorden	821,482
Telescoping jack or press, tubular, S. B. Minnich	820,983
Theater, H. Helbig	821,164
Thermometers, lens finder for clinical, W. Ude	821,141
Threshing machine attachment, J. I. Huffhines	821,496
Ticket counting and canceling machine, W. J. Coulter	821,465
Ticket or tag, T. H. O'Brien	821,526
Tie plate, J. T. De Souchet	821,343
Tires, repair plug for pneumatic, R. P. Kinney	821,041
Tobacco pipe, W. F. Dugins	821,030
Tongue and truck attachment, binder cross, C. C. Norman	821,054
Tongue support, vehicle, S. Chrisco	821,218
Tool, combination, Carlton & Meadow	821,155
Tool, extension, O'Reilley & Freese	821,527
Tool, hand-operated, H. D. Bartlett	821,328
Tool post, W. T. Slider	821,065
Top, spinning, H. O. Costello	821,341
Tower, transmission, D. R. Scholes	821,126
Toy, R. G. Dashiell	821,468
Transformer having the windings for one phase inoperative, operating a multiphase, W. S. Moody	821,521

Two Telephone Systems

in Greater New York would mean for business men

Two Books to Consult
Two Bells to Answer
Two Bills to Pay

MY BOOK FREE

"How to Remember"

Free to Readers of this Publication

Stop Forgetting

THE KEY TO SUCCESS

You are no greater intellectually than your memory. My course simple, inexpensive. Increases business capacity, social standing, gives an alert, ready memory for names, faces and business details. Develops will, conversation, speaking, etc. My booklet, "How to Remember," sent free.

DICKSON SCHOOL OF MEMORY, 700 Kimball Hall, Chicago

MENNEN'S

BORATED TALCUM

TOILET POWDER

After Shaving.

TRADE MARK

Insist that your barber use Mennen's Toilet Powder after he shaves you. **It is Antiseptic,** and will **prevent** any of the skin diseases often contracted. A positive relief for **Prickly Heat, Chafing** and **Sunburn,** and all afflictions of the skin. Removes all odor of perspiration. **Get Mennen's**—the original. Sold everywhere, or mailed for **25** cents. *Sample free.*

GERHARD MENNEN CO., Newark, N. J.

EBONITE PAINT-VARNISH

The engineer who needs a low-priced but thoroughly efficient coating for structural iron, smoke stacks, stands pipes, underground damp-proofing, etc., should investigate Ebonite Paint-Varnish.

Ebonite will stand heat and cold, and the expansion and contraction of metals better than any other composition on the market. Its cost is the lowest in the whole range of paint prices. Investigation and trial will convince the most exacting. Send for booklet, sample and prices.

BUCHANAN - FOSTER CO.

452 Chestnut Street, Philadelphia, Pa.

Electrical Engineering

and Experimental Work of Every Description

We have every facility for producing first-class work promptly. Our factory is equipped with modern machinery throughout.

C. F. SPLITDORF

Engineering Dept. 17-27 Vandewater St., N. Y. City



Stallman's Dresser Trunk

Easy to get at everything without disturbing anything. No fatigue in packing and unpacking. Light, strong, roomy drawers. Holds as much and costs no more than a good box trunk. Hand-riveted; strongest trunk made. In small room serves as chiffonier. C. O. D. with privilege of examination.

2c. stamp for Catalog.

F. A. STALLMAN, 61 W. Spring St., Columbus, O.

Asbestos and Magnesia Products

STEAM PIPE AND BOILER COVERINGS.
ASBESTOS PACKING (For all purposes).
ASBESTOS FIRE-RESISTING CEMENTS.
ASBESTOS BUILDING MATERIALS.
"J-M" ASBESTOS ROOFING.
ASBESTOS FABRICS.
KEYSTONE HAIR INSULATOR.
ELECTRICAL SUPPLIES.

H. W. JOHNS-MANVILLE CO.

New York, Milwaukee, Chicago, Boston, Philadelphia, St. Louis, Pittsburg, Cleveland, New Orleans, Kansas City, Minneapolis, Little Rock, San Francisco, Los Angeles, Seattle, London.



1906 THOMAS AUTO-BI

Model No. 44. Price $145

Three Horse Power. Simplest motorcycle on the market. Agents wanted everywhere. Catalog free.

THE THOMAS AUTO-BI CO.

1450 Niagara Street Buffalo, N. Y.

They Make Bad Roads Good

No slipping or skidding of wheels on any kind of conveyance if fitted with

WEED'S TIRE GRIPS

which ensure steady traveling. Can be carried in any car. Occupy but little space. Easily adjusted. Anyone can apply them. Protects occupants of car from flying mud etc. Indispensable in wet weather. Send for free descriptive booklet S.

WEED CHAIN TIRE GRIP CO., 28 Moore St., N. Y. City

THE "BEST" LIGHT

The most brilliant, economical light made. Our light gives 100-candle power at the small cost of 2c per week.

Is portable and there is no dirt, grease, odor or smoke. Over 100 different styles—every one warranted.

Agents wanted Everywhere.

THE BEST LIGHT CO.

Owners of Original Patents.

87 E. 5th St., Canton, O

MILLS FOR ALL MATERIALS.



OUR BUSINESS IS TO MAKE MACHINERY FOR GRINDING GRAIN, CRUSHING ROCKS AND PULVERIZING ALL HARD SUBSTANCES. WE HANDLE ALL KINDS OF MATERIALS FROM COTTON-SEED TO ROOTS AND HERBS, BY AN UNEXCELLED PROCESS. IF YOU WANT ANY KIND OF A MILL OR GRINDING MACHINE, COME TO US AND YOU WILL GET THE BEST AND STILL SAVE MONEY.

DEAL WITH US ONCE AND YOU WONT CHANGE.

ESTIMATES FREELY FURNISHED.

SPROUT, WALDRON & CO.

SEND FOR CATALOG No 4.) MUNCY, PA.

"Economo" Emery Wheel Dresser

Size 12 in.

Economo "Combination" Dresser

Made of an abrasive nearly as hard as the **Black Diamond.** Will true or shape any wheel except the very hard and carborundum. The *"Combination"* is the roughing tool placed in the handle end of "Economo." Send for circular. Dresser sent on 15 days' trial.

INTERNATIONAL SPECIALTY CO., 360 Holden Ave., Detroit, Mich.

PORTABLE CONCRETE

Block Machine



Ambitious young men can start fine business, immediately profitable, easily expanded.

Blocks cost 6 cents to make, sell for 18 cents. One man can make 200 blocks per day. Whole outfit costs $125.00.

Sand, water and Portland cement only materials required.

Sent on trial.

THE PETTYJOHN CO.

615 N. 6th St., Terre Haute, Ind.



Automatic Water Supply

Most economical, reliable and efficient. If you have running water the Niagara engines will elevate 25 feet for each foot fall obtainable from spring, brook, or river, delivered to any distance. Write for catalogue.

Niagara Hydraulic Engine Co

140 Nassau St., N. Y.

Wizard Repeating

LIQUID PISTOL



Nickel-plate 5 in. long Pat'd

Will stop the most vicious dog (or man) without permanent injury. Perfectly safe to carry without danger of leakage. Fires and recharges by pulling the trigger. Loads from any liquid. No cartridges required. Over 6 shots in one loading. All dealers, or by mail, **50c.** Rubber-covered holster, **5c. extra**

Parker, Stearns & Co., 226 South St., Dept. G, New York

The PRICE PYROMETER

eliminates guesswork. Any temperature from zero to 3000 degrees Fahr. indicated with absolute accuracy. Used in all industries. We guarantee satisfaction. Write for particulars and price, giving your requirements.

ELECTRIC DENTAL SPECIALTY CO.

2761 Euclid Ave., Cleveland, O.

DO YOU USE GRINDSTONES?

If so we can supply you. All sizes **mounted** and **unmounted,** always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. *Send for catalogue "L"*

The CLEVELAND STONE CO.

2d Floor, Wilshire, Cleveland, O.

The Genuine Armstrong's STOCKS and DIES

Acknowledged to be the best. Different sizes and capacities. Write for catalog.

THE ARMSTRONG MFG. CO., Bridgeport, Conn.

New York Office, 139 Centre Street

HASBROUCK



SAFE! SIMPLE! SILENT! SAVING!

A combination of excellence unsurpassed in the motor world. Send for illustrated catalogue, sent free.

Hasbrouck Motor Works, Inc., New London, Conn.

Valuable Volumes

JUST PUBLISHED

American Tool Making and Interchangeable Manufacturing

By JOSEPH V. WOODWORTH

This is a complete practical treatise on the Art of American Tool Making and System of Interchangeable Manufacturing as carried on to-day in the United States. In it are described and illustrated all of the different types and classes of small Tools, Fixtures, Devices and Special Appliances which are, or should be, in general use in all machine manufacturing and metal working establishments where economy, capacity and interchangeability in the production of machined metal parts are imperative.

All of the tools, fixtures and devises illustrated and described have been, or are, used for the actual production of work, such as parts of Drill Presses, Lathes, Patented Machinery, Typewriters, Electrical Apparatus, Mechanical Appliances, Brass Goods, Composition Parts, Mould Products, Sheet Metal Articles, Drop Forging, Jewelry, Watches, Metals, Coins, etc.

The treatment of each tool described and illustrated is such as to enable any Practical Man to Design, Construct and use Special Tools, Dies and Fixtures, for the Rapid and Accurate Production of Metal Parts interchangebly.

To the Machinist, Tool Maker, Designer, Die Maker, Superintendent, Manager and Shop Proprietor this book shows the 20th Century Manufacturing Methods and Assists in Reducing the Expense and Increasing the Output and the Income. A book on the System of Interchangeable Manufacturing—The System that has Won for the United States the Industrial Supremacy of the World.

535 Pages **Bound in Cloth** **600 Illustrations**

PRICE $4.00

JUST PUBLISHED

Scientific American Reference Book

12mo. 516 Pages. Illustrated. 6 Colored Plates. Price $1.50, postpaid



The result of the queries of three generations of readers and correspondents is crystallized in this book, which has been in course of preparation for months. It is indispensable to every family and business man. It deals with matters of interest to everybody. The book contains 50,000 facts, and is much more complete and more exhaustive than anything of the kind which has ever been attempted. The "Scientific American Reference Book" has been compiled after gauging the known wants of thousands. It has been revised by eminent statisticians. Information has been drawn from over one ton of Government reports alone. It is a book of everyday reference—more useful than an encyclopedia, because you will find what you want in an instant in a more condensed form. Sixty years of experience alone have made it possible for the publishers of the SCIENTIFIC AMERICAN to present to the purchasers of this book a remarkable aggregation of information.

MECHANICAL MOVEMENTS

Powers, Devices & Appliances.

By GARDNER D. HISCOX, M. E.

Large 8vo. 402 Pages. 1649 Illustrations, with Descriptive Text. **Price $3.00.**

Mechanical Appliances

Mechanical Movements and Novelties of Construction

By GARDNER D. HISCOX, M. E.

Being a Supplementary Volume to the Author's Work entitled

MECHANICAL MOVEMENTS, POWERS AND DEVICES.

Contains 1000 Special Made Engravings. 400 Pages. Cloth Bound.

Price $3.00

The above two volumes sold together for $5.00 post-paid

A Complete Electrical Library.

By PROF. T. O'CONOR SLOANE.

An inexpensive library of the best books on Electricity. Put up in a neat folding box, as shown in cut. For the student, the amateur, the workshop, the electrical engineer, schools and colleges. Comprising five books, as follows:

Arithmetic of Electricity 138 pages, . . . $1.00
Electric Toy Making, 140 pages, ... $1.00
How to Become a Successful Electrician, 189 pages, ... $1.00
Standard Electrical Dictionary, 682 pages, $3.00
Electricity Simplified, 158 pages, ... $1.00



Five volumes, 1,300 pages and over 450 illustrations.

A valuable and indispensable addition to every library.

Our Great Special Offer.—We will send prepaid the above five volumes, handsomely bound in blue cloth with silver lettering, and inclosed in a neat folding box, as shown in the illustration, at the **Special Reduced Price of $5.00** for the complete set. The regular price of the five volumes is $7.00.

JUST PUBLISHED

American Estates and Gardens

By BARR FERREE

4to. 11 x 13½ inches. Illuminated Cover and 275 Illustrations. 340 Pages. Price $10.00

☞ *Special circular of contents of these volumes sent free*

MUNN & CO., Publishers,
361 BROADWAY NEW YORK.

Trapping rabbits and other animals, means and apparatus for, W. Strawbridge	821,199
Tripod stand, camera, A. McLeod	821,052
Trolley wheel, ball bearing electric, Boyle & Cleveland	821,400
Trolley wire hanger, A. J. Laverty	821,512
Truck bolster, car, ●. S. Pulliam	821,312
Truck, car, Brill & Adams	821,279
Truck end casting, O. S. Pulliam	821,313
Tumbler, D. T. Graham	821,483
Turbine driving means, W. B. Sayers	821,436
Turbine, fractional supply steam and gas, J. W. O. Elling	821,347
Turbine, steam, J. L. Moore	821,051
Turbine, steam, J. Stumpf	821,599
Turpentine, treating wood for the extraction of, F. T. Snyder	821,264
Twine holder, E. O. Bulman	821,015
Type perfecting mechanism, W. A. Schraubstadter	821,127
Type, printing, C. B. Askew	821,076
Typewriter, F. P. Shepard	821,263
Typewriter copy holder, E. A. Holritz	821,099
Typewriters, shift key action for, F. P. Shepard	821,262
Typewriting machine, W. F. Helmond	821,036
Typewriting machine, E. G. Latta	821,107
Typewriting machine, G. A. Seib	821,382
Typewriting machine computing attachment, J. H. Neal	821,428
Undergarment, lady's, W. S. Lodge	821,046
Urn, Kamper & Schofield	821,365
Valve, W. H. Kline	821,507
Valve actuating mechanism, time controlled, A. J. Oakes	821,184
Valve for steam engines, oscillating, T. V. Elliott	821,227
Valve gear, engine, T. H. Haberkorn	821,236
Valve seat truing device, J. D. Mitchell	821,367
Valve, throttle, W. A. Phillips	821,120
Vaporizer, H. A. Veazie	821,004
Vehicle, J. M. Coleman	820,956
Vehicle body, W. D. McNutt	821,053
Vehicle, motor road, W. B. Megone	821,302
Vehicle seat lock, H. C. Swan	821,319
Vehicle wheel, G. H. Mitchell	821,519
Vehicle wheel, road, A. C. Birkin	821,213
Vehicles, gear controlling device of motor, Gadsey & Dorris	821,161
Ventilating apparatus, automatic, J. H. Hummel	821,416
Vessel, A. Leslie	821,514
Vibrators, removable anvil contact and bridge support for electric, W. E. Dow	821,028
Wagon brake, C. H. Gober	821,357
Wall for dams, barriers, protection walls, and reservoir walls, and the like, F. Hennebique	821,037
Walls, floors, etc., construction of, E. Molloy	821,368
Washing machines, securing clamp for, M. Warner	821,559
Water attemperating and measuring system, F. M. Peters	821,187
Water heating boiler, Meyers & Loudenslager	821,304
Water motor for utilizing the ebb and flow of the tide, G. Geyer	821,480
Water tube boiler, J. C. Beckley	821,329
Water tube boiler, W. T. Eastman	821,345
Weather strip, E. F. Shellaberger	821,261
Weighing machine or meter, tip tank, W. H. Pearce	821,531
Wheel. See Hand wheel.	
Whiffletree, Meister & Wright	821,179
Whiffletree, Spillman & Fowler	821,383
Whiffletree hook, R. A. Dilts	821,158
Whip holder, L. Miller	821,427
Whistle, E. P. Gray	821,358
Windmill, J. Pestor	820,988
Window, R. M. Dixon	820,958
Window, E. M. Erb	820,960
Window, H. Hyde	821,101
Window, balanced, A. Knox	821,510
Window construction, E. M. Erb	821,228
Window screen, H. E. Southworth	821,384
Windows, spring bolt for, D. Wilde	821,390
Wire and insulator holder, Seguin & Gingras	821,062
Wire coiling tool, O. A. Gant	821,162
Wire stretcher, A. A. Smith, reissue	12,484
Wool scouring machine, J. H. Tillinghast	821,139
Woven fabric, H. W. Smith	820,994
Woven fabric, W. M. Stevenson	821,441
Wrapping machine, J. Pfeifer	821,375
Wrench, H. R. Smith	821,438

DESIGNS.

Badge, D. Z. Merchant	38,017
Book leaf, family record, F. A. Brown	38,030
Brushes, mirrors, or similar articles, back for, S. A. Keller	38,021
Clock frame, S. M. Lawson	38,022
Desk, hotel register, F. F. Doleshy	38,029
Hat, S. Mundheim	38,031
Hook, bath room, A. N. Lattin	38,025
Match holder, M. Mayer	38,023
Range, cooking, F. J. Frey	38,028
Reflector, prismatic glass, O. A. Mygatt	38,026
Scale supporting stand, W. H. Sargent	38,024
Spoons, forks, or similar articles, handle for, J. Clulee	38,018, 38,019
Spoons, forks, or similar articles, handle of, W. C. Codman	38,020
Telephone switchboard casing, F. R. McBerty	38,027

TRADE MARKS

Accordions, C. Bruno	52,878
Albumen obtained from the treatment of starch, Tolhausen & Klein	53,017
Ale, J. Labatt	53,048
Alterative, tonic, and blood purifying compounds, S. K. Elliott	53,071
Anesthetics, Farbwerke vorm. Meister Lucius & Bruning	53,072
Automobiles, Premier Motor Manufacturing Co.	52,872
Automobiles, Aerocar Co.	52,895, 52,896
Axes, American Tool Co.	52,943
Baking powder, F. L. Zabriskie	52,968
Baking powder, Cleveland Baking Powder Co.	52,994
Baking powder, Sprague, Warner & Co.	53,013
Bath tubs, Standard Sanitary Manufacturing Co.	53,016
Batteries, dry, Empire State Dry Battery Co.	52,950
Beef extract, Pioneer Packing Co.	52,984
Beef, pork, and mutton, fresh, Agar Packing Co.	52,928
Beer, Anheuser-Busch Brewing Association	52,992
Beverage syrup, M. L. Eppstein	52,998
Biscuit or crackers, Natural Food Co.	52,858, 52,961
Bonnets, hats, and head dresses, women's, K. Gandy	52,826
Books on salesmanship, National School of Salesmanship	52,934
Boots and shoes, leather, Bradley & Metcalf Co.	52,825
Boots and shoes, leather, J. B. Hunter,	52,829, 52,932
Boots and shoes, leather, A. A. Rosenbush & Co.	52,935
Boots, shoes, and slippers, men's and boys' leather, James A. Banister Co.	52,911
Brandy, P. Freiler	53,039
Brandy, P. J. Bowlin Liquor Co.	53,055
Brushes, S. Maw, Son & Sons	53,051
Brushes of all kinds, John L. Whiting & Son Co.	52,830 to 52,838
	52,851, 52,852, 52,864 to 52,870
Butter, F. Grunert	52,885
Butter, Owl's Head Creamery Co.	53,008
Buttons, Alma Manufacturing Co.	52,897
Candies, bonbons, and chocolate candy, M. L. Morgenthau	52,004
Candy, Darby Candy Co.	52,973
Candy, Robert F. Mackenzie Co.	53,010
Canned corn, P. Hohenadel, Jr.	52,979
Canned fruits and vegetables, Wilkinson, Gaddis & Co.	52,924
Canned fruits and vegetables, S. Hamill Co.	52,936
Canned fruits and vegetables, Booth Packing Co.	52,993
Canned lobster, Wilkinson, Gaddis & Co.	52,923
Canned sardines, William Underwood Co.	52,990

Perry Time Stamp

PORTABLE, SELF-INKING and AUTOMATIC

Unlike and far better than any time stamp ever made.

Prints the month, day, hour and minute on any surface where a rubber stamp can print. The most progressive firms are using it to prevent delay in handling correspondence, orders, telegrams, invoices, shipping goods, etc. Unequaled for factory cost systems and timing employees. Guaranteed one year—will last a lifetime.

Write for edition R of our free booklet, "The Business Man's Time Saver." Tells all about the Perry Time Stamp and our Ten-Day Free Trial Offer.

PERRY TIME STAMP CO.
11 S. Jefferson St., Chicago
95 Liberty St., N. Y. City
Branch offices in all important cities.



I Will Make You Prosperous

If you are honest and ambitious write me today. No matter where you live or what your occupation has been, I will teach you the Real Estate business by mail; appoint you Special Representative of my Company in your town; start you in a profitable business of your own, and help you make big money at once. **Unusual opportunity for men without capital to become independent for life. Valuable book and full particulars free. Write to-day. Address nearest office.**

EDWIN R. MARDEN, President
National Co-operative Realty Co.
1528 Athenæum Building, Chicago
1528 Maryland Building, Washington, D. C.

"SPRINGFIELD" SPEEDOMETER



TELLS THE TRUTH

Because the Mechanical Principles used in its construction are correct.

Absolutely Accurate. All Speeds.

Pointer Always Steady.

Combines Trip and Season Odometer

FREE BOOKLET.

R. H. SMITH MFG. CO.
Springfield, Mass.

Established 1865.

ELECTRO MOTOR. SIMPLE, HOW TO

make.—By G. M. Hopkins. Description of a small electric motor devised and constructed with a view to assisting amateurs to make a motor which might be driven with advantage by a current derived from a battery, and which would have sufficient power to operate a foot lathe or any machine requiring not over one man power. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **641.** Price 10 cents. To be had at this office and from all newsdealers.

JAGER Marine 4-Cycle Engines



Skillfully designed and well built. Single lever control, combining automatic carburettor with spark advance. Develops wide speed range and reliability under most trying conditions. Sizes 3 to 60 h. p. Send for catalog.

CHAS. J. JAGER CO.
281 Franklin, cor. Batterymarch St., Boston, Mass.

Regal Marine Engines



Four Cycle Automobile Type with Jump Spark Ignition. Single Cylinders, in 1 1-2, 3 and 5 h. p. Double Cylinders, 8 and 15 h. p. Four Cylinders, 30 h. p. Also a superior line of Stationary Engines. It pays Engine buyers to read our new catalogue No. 12.

Regal Gasoline Engine Co.
COLDWATER, MICH.

KEROSENE OIL ENGINES



Marine Stationary Portable.

NO DANGER, Maximum Power, Lightest Weight, Simple, Reliable, Economical. No Batteries, Self Ignition by Compression. Fully Guaranteed. Write for Catalogue F. M. ☞No charge for packing.

International Oil Engine Co.
253 Broadway, N. Y., U. S. A.

HOW TO MAKE AN ELECTRICAL

Furnace for Amateur's Use.—The utilization of 110 volt electric circuits for small furnace work. By N. Monroe Hopkins. This valuable article is accompanied by detailed working drawings on a large scale, and the furnace can be made by any amateur who is versed in the use of tools. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1182.** Price 10 cents. For sale by MUNN & CO., 361 Broadway, New York City, or by any bookseller or newsdealer.

RELIABLE MARINE ENGINES



Reliability under all conditions is the characteristic of the "Lamb" Engines. Sizes from 1½ to 100 H. P. in stock. Write for catalogue.

TERRY & CO.
Managers Eastern and Foreign Branch
92 Chambers St., New York
Everything for Boat & Engine

French Motors for Lighting Plants



The **"ASTER"** is the best French motor on the market for lighting houses, hotels, etc. Small, compact, simple and safe to operate. Motive power alcohol, oil or gas. 2 and 4 cylinders. Great power for small engines. Easy running. Write for illustrated Price List.

ASTER COMPANY
1591 Broadway **NEW YORK CITY**

SORE THROAT

To prove the Efficiency of

Hydrozone

to Sore Throat Sufferers, I will send **One 25 Cent Bottle Free** to everyone sending me this advertisement with 10 cents to pay postage and packing. Hydrozone is a harmless germicide, indorsed and successfully used by leading physicians. Not genuine without my signature on label. Ask for Booklet on Treatment of Diseases. Sold by Leading Druggists. Good until July 10, 1906.

Prof. Charles Marchand

Dept. U, 63 Prince Street, New York



THERE'S NOTHING "JUST AS GOOD."

See that your papers are fastened together securely by using Washburne's Patent Adjustable

"O. K." PAPER FASTENERS

The **"O. K."** has the **advantage** of a **tiny** but **mighty, indestructible piercing point,** which **goes** through **every sheet, co-acting** with a small **protecting sleeve,** to **bind** and **hold** with a **bull-dog grip. No slipping. Handsome. Compact. Strong. Easily put on** or **taken off** with the **thumb** and **finger.** Can be **used repeatedly,** and **they always work.** Made of **brass. Three sizes.** Put up in **brass boxes** of **100** Fasteners each. At all enterprising Stationers. **Send 10c. for sample box of 50, assorted sizes. Booklet free. Liberal discount to the trade.**

JAMES V. WASHBURNE, Mfr., Syracuse, N. Y.

Perhaps You Want To Know



something about a particular Tool, or Tools. This 950 page, cloth-bound **Tool Catalogue No. 22** tells you all you need to know about every tool made with illustrations of each. It will be sent to your address postpaid for $1.00 which you will get back from the first $10.00 purchase you make from us. Write for it to-day.

MONTGOMERY & CO.
105 Fulton St., N. Y. City



ELECTRICITY

Oldest and best school in world teaching ELECTRICITY exclusively. Course complete

IN ONE YEAR

Students actually construct Dynamos, Motors and electrical instruments. Graduates hold good positions. *Fourteenth* year opens Sept. 26. Send for free Catalog to **Bliss Electrical School, 214 G Street N. W., Washington, D. C**



NO TACKS NOR HAMMER NEEDED

Fasten up the innumerable "LITTLE THINGS" about your home without defacing walls or wood work. Use

MOORE PUSH-PINS

Polished **Glass** handles, **Steel** points. Strong and ornamental. **Try them for pretty silk-corded CALENDARS.** At stationery, house-furnishing, notion and photo-supply stores or mailed prepaid for 20c. per dozen, assorted, No. 1 or 2 like cuts. **MOORE PUSH-PIN CO., 182 S. 11th St., Philadelphia, Pa.**
Here's a Pin! Push it in! Circular.

Rain, snow, ice, wind, frost and summer sun are powerless against it. On a barn, a factory or a dwelling it will give perfect results for years after other roofings are worn out. Our free sample shows its value. Write for it.

WARREN CHEMICAL & MFG. CO.
1s Battery Place, New York

WELL DRILLING Machines

Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.

WILLIAMS BROS., Ithaca, N. Y.

To Book Buyers

We have just issued a new 48-page catalogue of recently published Scientific and Mechanical Books, which we will mail free to any address on application.

MUNN & COMPANY
Publishers of SCIENTIFIC AMERICAN
361 Broadway, New York

Classified Advertising

SALE AND EXCHANGE.

WANTED. USEFUL AND AMUSING NOVELTIES which have not been put on the market. State full particulars as to subject, etc. None others considered. H. E. E. S., Box 773, N. Y.

ESTABLISHED 1862. Flag Poles, Copper Weather Vanes and Special Copper Cable. Lightning Conductors. D. Dorencorf, Successor to C. H. Lilly, 145 Centre St., New York.

CEMENT BOOKS. Invaluable to property owners, farmers, architects, builders, contractors, etc. How to use Portland Cement, 50c.; Cement Sidewalk Construction, 50c.; Reinforced Concrete Construction, $2.50; Hollow Block Concrete Construction, 50c. Sent postage paid. Cement and Engineering News, Chicago, Ill.

GLOBE INCUBATORS. Hatch chickens. No experience necessary. Our large new Illustrated Catalogue of Incubators and Brooders and Poultry Information mailed free. Write to-day. Address C. C. Shoemaker, Box 660, Freeport, Ill.

TO MANUFACTURERS.—We have the cheapest, simplest, most efficient, automatic, self-heating soldering iron. Also a sadiron. Perfect combustion and no flame exposure. Fully protected by patents. Willing to demonstrate. Stevenson & Stewart, 60 Wall Street.

REAL ESTATE. All Kinds. All Over. Samuel Swett of Long Island. Headquarters, Huntington, L. I., N. Y.

SHROPSHIRE SHEEP. Just imported and ready for sale. 80 Yearling Ewes. 30 Yearling Rams. Pick of the English flocks this year. Altamont Stock Farm, Millbrook, N. Y. Property of G. Howard Davison.

VALUABLE INFORMATION for those who build, buy or rent a home. Send postal for descriptive booklet. House Hints Publishing Co., Department 28, Philadelphia.

FROG RAISING. A business which requires small investment and brings large returns. Our book, "How to Breed, Feed and Raise Frogs," gives you the practical knowledge. Price postpaid, $1.00. Meadow Brook Farm, Allendale, N. J.

FOR SALE. The well-known fawn pug, "The Whaup." Has one of the best heads on the bench. As a stud dog he is most valuable, the puppies he sires being of the highest quality. Price £60. Apply to Mrs. Trested Clark, 7 Belsize Square, London, N. W., England.

FACTORY FOR SALE OR RENT. At Hackensack, N. J. Substantial brick building, 75 x 35, three stories. With large sheds, etc. Lot 75 x 110. Suitable for any kind of manufacturing. Opposite the depot of the New York, Susquehanna and Western Railroad. For terms apply to George J. Ackerman, 255 Union St., Hackensack, N. J.

MACHINERY FOR SALE.

FOR SALE.—One Shafer Hydraulic Platen Press, 60 tons pressure; 18 inches platen with a 12-inch movement of ram; complete, with pump belt drive, lock-up pressure and safety valve. Vacuo-Static Carbon Co., Mill and Platt Sts., Rochester, N. Y.

FOR SALE.—At Taunton, Mass., patterns, patents, drawings; 4 to 25 horse-power gas or oil engines. Ten years test. Can furnish sample. Hadwen Swain Mfg. Co., 505 Sacramento St., San Francisco, Cal.

FINE LITHOGRAPHED LETTER HEADS, Bill Heads, Envelopes and Checks, gives standing. Write to-day for prices, mentioning this paper. Stilwell, 709 Pine St., St. Louis.

WE DRILL ARTESIAN WELLS for water supply for cities, towns, manufacturing plants and country homes. We furnish and install Tanks and Towers, Windmills, Compressed Air, Steam, Electric and Hand Pumps to do the pumping. Many years' experience. We are experts in our line. Write us, and our representative will call to see you. A. W. Drake Drilling Co., Hazleton, Pa.

PATENTS FOR SALE.

I HAVE FOR SALE the U. S. and all foreign rights of new patent Improvements in Water Tube Types of Boilers. Great economizer. J. M. Colman, Everett, Wash.

FOR SALE.—Patent rights for United States on three illustrated post card novelties. If interested send 50c. for samples. W. Barker, Jeffersonville, N. Y.

PATENTS.—European Rights. I want sole agency for Europe for good-selling patents, or might buy rights. James R. Moodie, 73 Inverleith Row, Edinburgh, Scotland.

FOR SALE.—Canada, Mexico and European patents on End-Gate Fasteners. A good selling article in the United States; also U. S. patent on hoe. Address Adolph Abraham, Corby Building, St. Joseph, Mo.

PARTNERS WANTED.

WANTED, A PARTNER. I have a complete plan for making an apparatus to be driven by gravity. Wanted a capitalist to develop the invention. D. Gingold, 297 Cherry St., New York City.

SITUATIONS AND PROFESSIONAL OPENINGS.

HAS YOUR BUSINESS USE FOR A MAN who can devise and execute plans for advertising developing sales, minimizing expense through labor-saving methods, accounting, finances, credits and collections? Advertiser has original ideas, thoroughly practical experience, seventeen years corporation secretary, the last fourteen in prominent company, in which he successfully handled a million dollar advertising appropriation and to which he refers. Other high-class references. G. S. Curtis, 299 Mercer St., N. Y.

WANTED.—Commission salesman to handle belting in the Southern States. Write to the F. Raniville Co., Leather Belt Manufacturers, Grand Rapids, Mich. Mention this paper.

ENGINEERING WANTS.

WANTED.—Articles to manufacture in either wood or iron, by well-equipped foundry and machine shop. Ypsilanti Machine Works, Ypsilanti, Mich.

SOLE AGENTS FOR RIEFLER'S INSTRUMENTS, Ott's Pantographs, Drawing and Blue Print Paper, Drawing Boards, Tables, Squares, Triangles, etc., Engineers' and Builders' Transits, and Levels of Best Makes. Send for illustrated catalogue, Vol. III. F. Weber & Co., Engineers' and Draughtsmen's Supplies, 1125 Chestnut St., Philadelphia, Pa. Branch Houses: St. Louis and Baltimore.

HOTELS AND RESORTS.

JAMESTOWN, OPPOSITE NEWPORT. Thorndyke Hotel and 8 new cottages, furnished. Charming location on shores of Narragansett Bay; 15 minutes to Newport by ferry. P. H. Horgan, Newport, R. I.

PROFESSIONAL CARDS.

LANDSCAPE ARCHITECTS. J. H. Shepard & Son, 302 Euclid Ave., Syracuse, N. Y. Twenty-five years' experience.

LANDSCAPE ARCHITECT. Wm. Webster, 560 North St., Rochester, N. Y. Established 1853.

BUILD AT COST. Town or Country. W. H. A. Horsfall, Architect, 18 and 20 East 42d St., New York, N. Y. Tel. 2968—38th.

LANDSCAPE ARCHITECTS AND CIVIL ENGINEERS. Wohlert & Walberg, Broadway, New York, 224 Stephen Girard Building, Philadelphia.

BEAUTIFUL HOMES. Send for our fine portfolio of photographs of low cost homes, well planned, practical and artistic. They have no superiors. Postpaid, 25 cents, silver. Knapp & West, Architects, Dept. B, Colman Building, Seattle, U. S. A.

Caps and blasting fuses, detonating, Aetna Powder Co. 52,843
Car couplings, vertical plane, National Malleable Castings Co. 52,916
Cards, playing, New York Consolidated Card Co. ..... 53,052 to 53,054
Cards, playing, United States Playing Card Co. 53,063, 53,089
Cement, hydraulic, Utica Cement Manufacturing Co. 52,892
Cheese, Popper, Gray & Co. 52,890
Chocolate, Societe Generale Suisse de Chocolats 52,937, 52,938
Cigarette paper in all forms, L. Kehlmann. 52,913
Cigars, P. Weinreich 52,921
Cigars, cheroots, and cigarettes made of cigar tobacco, Cayey-Caguas Tobacco Co. 52,902
Circuits, device for connecting branch and main, H. T. Paiste Co. 52,909
Clocks and watches, Western Clock Manufacturing Co. 52,989
Coats, rainproof, L. E. Hess. 52,828
Coats, vests, trousers, and overcoats, M. Wile & Co. 52,959
Collars and cuffs, William Barker Co. 52,841
Cooking and household utensils, enameled steelware, M. Stransky 52,939
Cotton batting, W. Lowenthal 52,915
Cotton damask, Rosemary Manufacturing Co. 52,962
Cotton, felted absorbent, Johnson & Johnson, 52,956, 52,957
Cotton piece goods, Everett Mills. 52,960
Crayons, American Crayon Co. 52,898, 52,899
Cream separators, De Laval Separator Co., 52,995, 52,996
Culinary utensils made of galvanized ware, Lisk Manufacturing Co. 52,914
Cultivators, Whitman & Barnes Manufacturing Co. 52,863
Dietetic albuminous preparations, Bauer & Co. 53,028
Electric switches and parts thereof, D. & W. Fuse Co. 52,844
Electrical appliances, certain named, Hart Manufacturing Co. 52,848
Engines, gas or oil, Temple Pump Co. 52,920
Envelops and paper, C. J. Cohen & Son, 52,879 to 52,881
Extracts, Sprague, Warner & Co. 52,014
Fabrics, certain named, Union Fibre Co. 53,018
Feathers, ostrich, W. Freystadt Straussfeder Fabrik 52,975
Feed water heaters, National Pipe Bending Co. 52,871
Felt, roofing, sheathing, waterproofing, and building, Warren-Ehert Co. 52,988
Fertilizer, bone, F. S. Royster Guano Co. 52,845
Fireworks, hand stick, E. H. Wagner. 53,023
Fireworks, torpedo, E. H. Wagner, 53,021, 53,022, 53,024
Flour, wheat, Cordell Gin and Milling Co. .. 52,882
Flour, wheat, Ellendale Milling Co. 52,883
Flour, wheat, Geary Milling & Elevator Co.. 52,951
Flour, wheat, Highland Milling Co. 52,954
Flour, wheat, Ballard & Ballard Co..52,969, 52,970
Flour, wheat, Security Milling Co. 52,986
Food, poultry, M. W. Savage 53,012
Food, stock, Molassine Co. 52,982
Food, stock, M. W. Savage 53,011
Food, wheat breakfast, Wheatena Co. 53,025
Fruits, dried, S. C. Tooker & Co. 52,891
Furs in the piece and fur garments, M. Bowsky 52,946
Gas burners and mantels therefor, Welsbach Light Co. 52,942
Glue, gum, and mucilage, liquid, Lyons Ink, Limited 52,981
Grindstone frames, Whitman & Barnes Manufacturing Co. 52,873
Guns and rifles, shot, Winchester Repeating Arms Co. 52,927
Hair and head, preparations for the treatment of the, Hudson & Co. 53,082
Hair curlers, Magic Curler Co. 53,049
Horseshoes, International Union of Journeymen Horseshoers 52,910
Horseshoes and calks, Neverslip Manufacturing Co. 52,917
Hosiery, E. Blood 52,877
Insulating compound, E. Calman & Co. 52,901
Insulating tape, Massachusetts Chemical Co. 52,857
Jewelry, sterling silver, Theodore W. Foster & Bro. Co. 52,840
Knife sections, Whitman & Barnes Manufacturing Co. 52,876
Knives, pocket, A. Kastor & Bros. 52,853
Knives, pocket, Supplee Hardware Co. 52,964
Laxatives, Frederick Stearns & Co. 53,076
Laxatives, K K K Medicine Co. 53,083
Lever, lumber handling, J. M. Ferriss, Jr. .. 52,846
Macaroni, spaghetti, and vermicelli, John B. Canepa Co. 52,980
Macaroni, vermicelli, spaghetti, and noodles, J. B. Canepa 52,971
Magazine or periodical, Currier-Boyce Co. 52,906
Mainsprings, timepiece, B. Allen 52,929
Medicinal preparations in liquid and solid form for internal use, Bristol-Myers Co., 53,030, 53,031
Medicinal tonic and cordial, U. Wolfe Co. .. 53,062
Medicine, certain named, F. J. Schmidt. ... 53,088
Medicine for affections of the throat and bronchial tubes, Frederick Stearns & Co. 53,037
Medicine for certain named diseases, Frederick Stearns & Co. 53,079
Medicine for limber neck and roup, poultry, C. J. Clarke 53,067
Milk, condensed, Vermont Condensed Milk Co., 52,894, 52,940, 52,941, 52,987, 53,019, 53,020
Mower, binder, reaper, and header knife and sickle heads, Whitman & Barnes Manufacturing Co. 52,922
Ointment, P. Gary 53,080
Ointments, Foster-McClellan Co. 53,075
Olives, stuffed, S. J. Valk & Bro. 52,893
Overalls, Globe Overall Co. 52,884
Packing, machinery, C. Nuhring 52,983
Painters' supplies, certain named, Gerstendorfer Bros. 52,847
Paper and envelops, F. A. Flinn. 52,931
Paper, toilet, T. F. Sprigg. 52,918
Pens, metallic, Spencerian Pen Co. 52,860
Pens, steel, Payot, Upham & Co. 52,888, 52,889
Pianos, Decker & Son 52,974
Pills, R. H. N. Johnson. 53,044
Pills and tablets, cathartic, Foster-McClellan Co. 53,073, 53,074
Pills for liver and bowel complaints, B. T. Davis 53,068
Pistols, Colt's Patent Fire Arms Manufacturing Co. 52,903, 52,904
Plasters, adhesive, Johnson & Johnson. 52,955
Powder, gun, American Powder Mills. 52,991
Powder, heave, Dr. Hess & Clark. 53,081
Pump buckets, chain, Temple Pump Co. 52,919
Remedies for certain named diseases, H. F. Edsall 52,997
Remedies for diphtheria, etc., L. d' Ambrosio 53,065
Remedies for diseases common to children, E. C. De Witt & Co. 53,069
Remedies for rheumatism, etc., J. L. Odom. 53,087
Remedy, catarrhal, G. Wilson 53,090
Remedy for certain named diseases, Moro Medical Co. 53,086
Remedy for rheumatism and gout, E. Bischoff 53,066
Remedy, neuralgia and headache, Frederick Stearns & Co. 53,077, 53,078
Safes, Herring-Hall-Marvin Safe Co. 52,827
Salt, P. J. L. Searing. 52,963
Sash adjusters and locks, combination, L. Petraccione 53,009
Scissors and shears, E. Forquignon. 52,908
Scrapers, earth, Kilbourne & Jacobs Manufacturing Co. 52,958
Scrapple, T. Harris 52,978
Screw drivers, Whitman & Barnes Manufacturing Co. 52,875
Seeds, field, grass, and clover, H. E. Conklin 52,905
Seeds, grass and field, W. G. Scarlett. 52,985
Sewing machines and parts and attachments, Willcox & Gibbs Sewing Machine Co., 52,925, 52,926
Shade cloth and shades, window, Jay C. Wemple Co. 52,912
Sheetings, Carey, Bayne & Smith Co. 52,930
Sheetings and drillings, Buffalo Cotton Mills. 52,948
Sheetings and drillings, cotton, Greenwood Cotton Mill 52,977
Shoe dressing, Geo. E. Keith Co. 53,001
Shoes, leather turned, C. O. Timson. 52,862

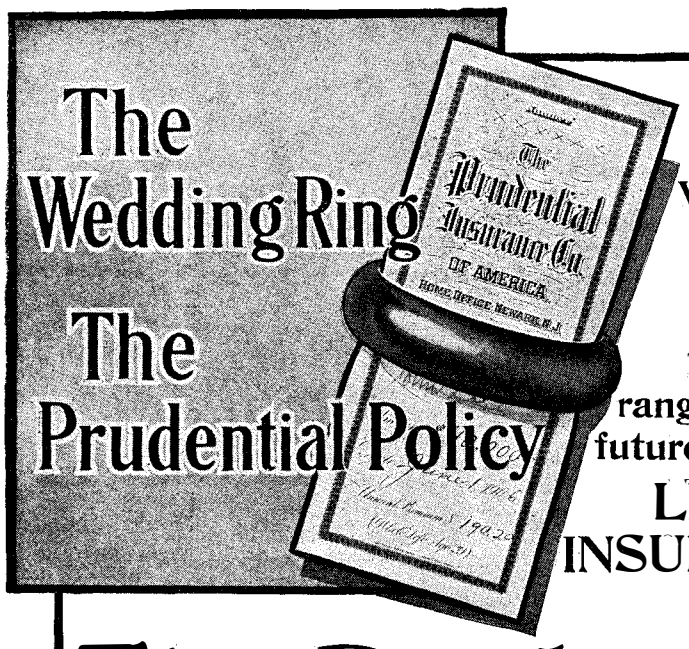

Secure a Woman's Hand in Marriage and you must arrange for her future welfare.

LIFE INSURANCE in

The Prudential

IS THE BEST MEDIUM.

Think this over and send for booklet showing cost of policy at your age. If you wish, you could secure a policy payable in full to your wife, or yourself, on a certain date. It will furnish Life Insurance from date of issue, to date of settlement. If you should not live, policy will be paid to your wife at once.

A Most Interesting Proposition to Married People

Write for Information To-Day While You Think of It.

The Prudential Insurance Co. OF AMERICA.

Incorporated as a Stock Company by the State of New Jersey.

JOHN F. DRYDEN, President. Dept. 121 Home Office: NEWARK, N. J.

30 Days Free Trial

of the Sanitary, Economical

Useeit

YOU-SEE-IT (THE WATER).

Water Cooler

Write for Illustrated Catalogue

Coolers made in six sizes and to fit any bottle, finished in white enamel trimmed in gold and nickel. For office or home. Price $6.00 to $12.00.

We will send one of our water coolers to any reliable person. You may use it 30 days; if perfectly satisfactory, remit for same; if not better than any other water cooler you ever saw, return it at our expense.

Note Advantages:

Water cannot become contaminated even if impure ice is used. Water flows directly from bottle to faucet through coil of pure block tin and is cooled in transit.

Above cut is a sectional view of our No. 4 cooler finished in white enamel, with two-gallon bottle. Ice capacity ten pounds. **Price $6.00.**

NOTICE.—Our cooler is covered by broad basic patents and we are now prosecuting vigorously several infringements.

N. B.—J. Hungerford Smith Co., Rochester, N. Y., have adopted the "USEEIT" Cooler with special features (Price $12.00) for dispensing their famous Golden Orangeade at first-class soda fountains. Write them.

THE CONSUMERS CO., 3517 Butler St., Chicago

Coolers delivered f. o. b. Chicago and New York

A Loose Leaf Book



PERFECTLY **Flat-Opening** AND **Self-Indexing**

Most convenient for price books, route books, pocket ledgers, meter books, engagement books and all forms of records which should be kept in convenient, accessible form. Better than any card index. These **"Unimatic"** books are bound in full, genuine, flexible, black leather, are **perfectly flat opening and sheets may be instantly inserted or removed from any part.**

The following sizes sent postpaid on receipt of price:

USE	No.	Binding Edge	Size of Sheet	Capac. of Cover: Inches	Capac. of Cover: Leaves	Complete
Vest Pocket	212	2	2 x 4	¼	50	$0.85
" "	4412	4½	4½ x 2½	¼	50	.95
Coat Pocket	612	6	6 x 3½	¼	50	1.20
" "	532	5½	5½ x 3	½	125	1.70
" "	632	6⅝	6⅝ x 3⅜	½	125	1.75
" "	7732	7⅞	7⅞ x 4⅛	½	125	2.10
Desk	1132	11	11 x 8½	½	125	3.90

19 other sizes carried in stock

Stock ruling: Quadrille, Unruled, Dollars and Cents, Faint Lines, Double Entry Ledger and 4-Column Price-Book Ruling.

Send for sample sheets and complete catalogue of largest line of loose-leaf devices in the world.

Sieber & Trussell Mfg. Co., 4002 Laclede Ave., St. Louis

Commercial Battles

are won by the applying of brains through a perfect implement for the accomplishment.

Underwood Typewriter

with

WRITING ALWAYS IN SIGHT

is the perfectly constructed, quick firing brain machine that advances the picket line of commerce.

UNDERWOOD TYPEWRITER CO., 241 Broadway, New York.



16 FOOT LAUNCH
COMPLETE WITH ENGINE $96
WE ARE THE LARGEST BUILDERS OF BOATS & LAUNCHES IN THE WORLD
SEND FOR FREE ILLUSTRATED CATALOG
ALL BOATS FITTED WITH WATER TIGHT COMPARTMENTS CAN NOT SINK.
WE CARRY A FULL LINE OF BOATS READY TO SHIP.
MICHIGAN STEEL BOAT CO. 1425 JEFFERSON AVE DETROIT MICH

American Homes and Gardens

BOUND—VOLUME ONE

Profusely Illustrated. Large Quarto. 426 Pages. Green Cloth Covers Produced in Several Colors. A Beautiful Book. Price $3.50

This volume, containing house plans, many suggestions for the decoration and furnishing of the home; also for the improvement of the grounds and the gardens, is indispensable to those requiring such information.

MUNN & CO., Publishers of the Scientific American
361 Broadway, New York

"The Maxwell"

The Car that Dispelled an Idea

The idea that a reliable, serviceable, ***adequate*** automobile could not be obtained for less than three to seven thousand dollars has been dispelled since the advent of the MAXWELL.

Even the experts could doubt no longer in the face of such proofs as the Maxwell cars have been furnishing for the past two seasons.

Let us send you our book of "Facts and Testimony." It will remove the doubt from your mind.

20 H. P. Touring Car **$1,450** — 10 H. P. Tourabout **$780**

Multiple Disc Clutch. Three-point Suspension of Motor and Transmission (Unit). Metal Bodies. No Noise. No Vibration.

Write Department 22 for Catalogue.

MAXWELL-BRISCOE MOTOR CO.

Members American Motor Car Manufacturers' Association

FACTORIES:

Main Plant: TARRYTOWN, N. Y.

CHICAGO, ILL. PAWTUCKET, R. I.

BRANCHES: Maxwell-Briscoe, Inc., New York, N. Y.; Maxwell-Briscoe-Chase Co., Chicago, Ill.; Fisher Automobile Co., Indianapolis, Ind.; Morrison Tyler Motor Co., Boston, Mass.; Maxwell-Briscoe-McLoeb Co., Detroit, Mich.; Maxwell Garage, Brooklyn, N. Y.; J. W. Willcox & Son, Los Angeles, Cal.; Richard Irvin & Co., Foreign Representatives.

The Wonder Gasoline Motors

Something New and Up-to-date

More power for less money than any other machine on the market. No valves, gears, etc., to get out of order. Jump Spark. Our 1½ H. P. marine outfit is a "WINNER." Solid or reversing propeller. Our prices will surprise you. Write to-day. Marine or stationary outfits to suit any requirements up to 5 H. P.

The R. M. Cornwell Co., 406 S. Salina St., SYRACUSE, N. Y.
434 Park Row Building, New York

Just $94.50 for this complete launch. This is not a small rowboat with an engine, but a full sized modern power boat. We are the largest manufacturers of power boats, canoes and dinghy's in the world. Write to-day for catalog.

Just $94.50

DETROIT BOAT CO 302 JEFFERSON AVE. DETROIT, MICH. MEMBERS NAT'L ASSN. BOAT & ENG. MFRS.

The Adirondack Mountains

Are now about the most central of all the great resorts. They have through Pullman sleeping cars from New York, Philadelphia, Boston, Buffalo and Niagara Falls via the

NEW YORK CENTRAL LINES

A night's ride takes you from any of these places to the center of the mountains in time for breakfast next morning.

For a copy of "The Adirondack Mountains and How to Reach Them," which is No. 20 of the New York Central Lines' "Four-Track Series," containing a fine map of the Adirondack Mountains and adjacent territory, with useful information in regard to hotels, camps, lakes, rivers, etc., send a two-cent stamp to George H. Daniels, Manager General Advertising Department, Room 26, Grand Central Station, New York.

C. F. DALY, Pass. Traffic Mgr., NEW YORK
W. J. LYNCH, Pass. Traffic Mgr., CHICAGO

60 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS &c.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. HANDBOOK on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. receive *special notice*, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

Shovels, Supplee Hardware Co.	52,965
Sifters, ash, J. P. Hill	52,849
Skin foods and complexion creams, Graham Bros. & Co.	53,041
Skirts and petticoats, Brown, Durrell & Co.	52,947
Smoke distilled from wood, liquid, E. H. Wright Co.	53,070
Soap, Monahan Antiseptic Co.	52,933
Soap, N. K. Fairbank Co.	53,005 to 53,007
Soap, laundry, J. G. Haas Soap Co.	52,850
Soldering tools, electric, L. P. Brown & Co.	52,900
Specific, headache, Migranose Importing Co.	53,085
Spectacles, eyeglasses, and lenses, A. K. Hawkes	52,953
Spices, Oklahoma Wholesale Grocer Co.	52,887
Spices, Gennerich & Von Bremen	52,976
Steel, Crucible Steel Company of America	52,907
Steelware, hollow enameled, Leffler, Thiele & Co.	52,886
Story paper, periodically issued, A. D. Porter Co.	52,842
Stoves, gas, W. M. Crane Co.	53,026
Tack claws, Whitman & Barnes Manufacturing Co.	52,874
Telephone switchboards, Sumter Telephone Manufacturing Co.	52,861
Tobacco, chewing and smoking, Bloch Bros. Tobacco Co.	52,944
Tonic beverage and extract for making same, carbonated, Blue Seal Supply Co.	52,945
Tonic for the scalp and skin, G. Timen	53,061
Tonics and medicated wines, Mariani & Co.	53,084
Turpentine, Standard Oil Co. of New York	53,015
Vanilla oil, Corrizo Extract Co.	52,949
Wagons and dump carts, farm, Kentucky Wagon Manufacturing Co.	52,855
Wagons, farm, Kentucky Wagon Manufacturing Co.	52,854, 52,856
Watches, watch cases and movements, Philadelphia Watch Case Co.	52,859
Watches, watch cases and movements, and parts thereof, New York Standard Watch Co.	52,839
Whisky, C. W. Bauer	53,027
Whisky, Bluthenthal & Bickart	53,029
Whisky, Chicago Distilling Co.	53,033
Whisky, J. M. Davis	53,034
Whisky, E. H. Taylor, Jr. & Son	53,035
Whisky, Feuchter Bros.	53,036
Whisky, Freiberg & Kahn	53,038
Whisky, A. Guckenheimer & Bros.	53,042
Whisky, H. L. Griesedieck Distilling Co.	53,043
Whisky, W. H. Jones & Co.	53,045
Whisky, Kaufmann, Baer & Co.	53,047
Whisky, J. A. Magnus & Co.	53,050
Whisky, J. H. F. Schwartz	53,056
Whisky, Star Distillery Co.	53,057
Whisky, F. J. Taber	52,058 to 52,060
Whisky, W. L. Weller & Sons	53,064
Whisky, pure malt Scotch, G. S. Grant	53,002
Wine, Henry Block Co.	53,003
Wine, Charles & Co.	53,032
Wine, W. H. Jones & Co.	53,046
Wines, P. Gargiulo & Co.	53,040
Worsted, woolen, and cotton-mixed piece goods, Griffon Co.	52,952
Wrenches, Whitman & Barnes Manufacturing Co.	52,966
Yeast, compressed, Fleischmann Co.	52,999, 53,000

LABELS.

"Blue Ribbon Crystalac," for interior varnishes, Beckwith-Chandler Co.	12,902
"Chastan," for cigars, Chas. P. Stanley Cigar Co.	12,901
"Cingala," for tea, B. Fischer & Co.	12,885
"Crescent," for port wine, A. M. Smith	12,887
"Don Renato," for cigars, A. C. Henschel & Co.	12,900
"Don't use can opener; use a nail or something similar," for cans, William Underwood & Co.	12,903
"Ferro-China Iavarone," for a medicine and tonic, G. Javarone	12,891
"Flor De P. Garcia & Bros.," for cigars, P. Garcia & Bros.	12,898
"Foldum," for toilet paper, Scott Paper Co.	12,905
"Jetter's Malt Tonic," for malt tonics, Wilmanns Bros. Co.	12,890
"John Milton," for cigars, H. Sommer Co.	12,899
"Karotone," for hair tonic, N. Carola	12,897
"Mull's Pain Cure," for medicine, E. E. Mull	12,892
"Pennant," for whisky, A. M. Smith	12,888
"Pinozone," for a proprietary medicine, Lakewood Pine Co.	12,893
"Pride of Gloucester," for cream codfish, B. S. Webber Fish Co.	12,883
"Pride of Gloucester," for sliced smoked halibut, B. S. Webber Fish Co.	12,884
"Protected Roofing," for roofing, Hyndman Roofing Co.	12,906
"Pure Breath Tablets," for breath tablets, Capron Chemical Co.	12,896
"Radiozone," for medicated preparations and articles, Dr. Warner Remedy Co.	12,894
"Reliance," for ladies' shirt waists, S. Schlein	12,904
"Sabo Blend," for roasted coffees, Woolson Spice Co.	12,886
"Tadellos," for beer, Ruehl Brothers Brewing Co.	12,889
"Wright's Electric Catarrh Cure," for a jelly-like substance for relief and cure of catarrh, G. H. Wright	12,895

PRINTS.

"At Your Service," for wheat, Butcher & Co.	1,668
"Carolina Brights Cigarettes, Manufactured by Wells-Whitehead Tobacco Co.," for cigarettes, Wells-Whitehead Tobacco Co.	1,674
"Coulson's Egg Food," for egg food, Coulson Poultry and Stock Food Co.	1,667
"Coulson's Hog Fattening Meal," for hog fattening meal, Coulson Poultry and Stock Food Co.	1,676
"Dere aint go'n'er be no leavin's," for food products, Battle Creek Breakfast Food Co., Ltd.	1,666
"Huyler's Chocolate," for Huyler's chocolate, Stahl & Jaeger, Inc.	1,670
"Liquid Fruits and Diamond Brand Crushed Fruits," for fruit syrups and crushed fruits, Liquid Carbonic Co.	1,671
"Nature's Romance," for beer, Meek Co.	1,672
"Otoe Preserving Co." for canned cream sugar corn, Otoe Preserving Co.	1,669
"Ready for the Storm," for rubbers, United States Rubber Co.	1,678
"Slack Cooperage Stock," for slack cooperage stock, Tindle & Jackson	1,681
"The Home of Sierra," for beer, Meek Co.	1,673
"The Hoosier Kitchen Cabinet, Cabinet No. 142," for a kitchen cabinet, Hoosier Manufacturing Co.	1,679
"The Hoosier Kitchen Cabinet, Cabinet No. 111," for a kitchen cabinet, Hoosier Manufacturing Co.	1,680
"The Positive Milk Fever Cure," for a milk fever remedy for cattle, C. A. Coe, Jr., Co.	1,675
"Wales-Goodyear Rubbers," for rubbers, United States Rubber Co.	1,677

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address **Munn & Co., 361 Broadway, New York.**

SENSITIVE LABORATORY BALANCE

By N. Monroe Hopkins. This "built-up" laboratory balance will weigh up to one pound and will turn with a quarter of a postage stamp. The balance can be made by any amateur skilled in the use of tools, and it will work as well as a $125 balance. The article is accompanied by detailed working drawings showing various stages of the work. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1184.** Price 10 cents. For sale by MUNN & Co., 361 Broadway, New York City, or any bookseller or newsdealer.

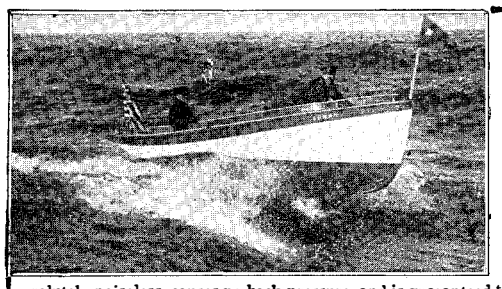

Six Miles Out

You don't experiment with a Truscott boat. It is right when it reaches you. Every Truscott motor is given the hardest kind of working test on the water—out where the waves "mean business." That's why

TRUSCOTT

boats won't "lie down." Light, strong, safe. Automatic control. Truscott underwater exhaust is absolutely noiseless, causes no back-pressure, and is guaranteed to accelerate the speed of the boat. Send stamps for 80 page catalog.

"The Book of Boats," the clearest, most comprehensive book on small craft, 128 pages, cloth bound, illustrated, sent postpaid with a year's subscription to our quarterly, "The Launch" for 50 cents.

TRUSCOTT BOAT MFG. COMPANY, Dept. 563, St. Joseph, Mich.

LEARN PLUMBING

and earn $5.00 a day. A few months' study at our school under the supervision of expert plumbers will enable you to earn this salary. We have a special department to secure positions for students after graduating. Write to-day for FREE CATALOGUE.

ST. LOUIS TRADE SCHOOL, 3972 Olive Street, St. Louis, Mo.

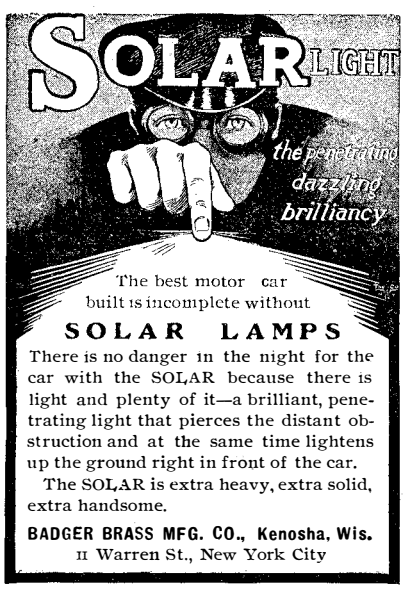

The best motor car built is incomplete without

SOLAR LAMPS

There is no danger in the night for the car with the SOLAR because there is light and plenty of it—a brilliant, penetrating light that pierces the distant obstruction and at the same time lightens up the ground right in front of the car.

The SOLAR is extra heavy, extra solid, extra handsome.

BADGER BRASS MFG. CO., Kenosha, Wis.
11 Warren St., New York City



WIRELESS TELEGRAPH

"Telimco No. 2" complete experimental outfit, comprising one inch spark coil, Balls, Key, 75 ohm Relay, Coherer with autom. Decoherer, 5 cells Battery, Wiring, Connections, instructions, diagrams, etc. Will work up to a mile. Price $12.50. Agents wanted. New Catalog of European and Amer. Elec. Novelties.

ELECTRO IMPORTING CO., 87 Warren St., New York

IT MAKES MONEY RAPIDLY

and pays for itself in two days work. There never was a machine like the

PHOTOSCOPE

for making money. Takes a perfect photograph automatically, develops, finishes and frames it for a nickel in less than one minute. Thousands in use making fortunes for their operators. Booklet and price-list free from

M. S. KLINE
45 N. Division St., BUFFALO, N. Y.

METAL POLISHES.—FORMULAS FOR Putz Pomades, Pastes, Liquids, Powders and Soap for polishing metals, are contained in SCIENTIFIC AMERICAN SUPPLEMENT Nos. **1283, 1288** and **1289.** Price 10 cents each from this office and all newsdealers

ROSE POLYTECHNIC INSTITUTE

Terre Haute, Ind. A College of Engineering, Mechanical, Electrical and Civil Engineering, Chemistry and Architecture. Extensive shops. Laboratory equipment, modern. Expenses low. For Catalogue and Professional Register of Alumni, address

C. L. MEES, President.

Men and boys wanted to learn plumbing, plastering, bricklaying. Special offer life scholarship fifty dollars, easy payments. Position and union card guaranteed. Free catalogue. Coyne Bros. Trade Schools, 239-243 Tenth Avenue, New York. Chicago. St. Louis.

Watch Making and Engraving School

We teach the trade thoroughly in three to six months. You can earn money while learning. Positions guaranteed to graduates. Terms most reasonable.

Kansas City Polytechnic Institute
1021 Grand Avenue, Kansas City, Missouri

LEARN WATCHMAKING

We teach it thoroughly in as many months as it formerly took years. Does away with tedious apprenticeship. Money earned while studying. Positions secured. Easy terms. Send for catalog.

ST. LOUIS WATCHMAKING SCHOOL, St. Louis, Mo.

Start A Mail Order Business.

Acknowledged by shrewd business men one of the most pleasant and profitable business in the World. Stop working for others—big profits—money comes with orders—our plan for starting beginners is a sure **winner** and offers you a chance to get in business for yourself. Full particulars for stamp.

A. FRANKLIN-HOWARD CO., Kansas City, Mo.



Removed to **132 Milk Street.**

Magical Apparatus.

Grand Book Catalogue. Over 700 engravings 25c. Parlor Tricks Catalogue, free.

MARTINKA & CO., Mfrs., 493 Sixth Ave., New York.

DO YOU

Want your PATENTS Developed?

Experimentals, Models and fine instrument work. Surveying instrument repairs a specialty.

Richter & Poncet, 115 Court Street, Hoboken, N. J.
Two minutes from D. L. W. Depot

WANTED

A Thoroughly Competent Master Mechanic

Familiar with all details of modern shop practice and management, and experienced in the manufacture of Threshers and Traction Engines. Address, stating qualifications, experience, etc.,

"MASTER MECHANIC,"
Room 4 No. 131 E. 4th St., Cincinnati, O.

PROPOSALS.

United States Department of Agriculture, Office of the Secretary, Washington, May 14, 1906. Sealed proposals will be received at the above office until 2 o'clock p. m., on the nineteenth day of June, and then and there opened, for furnishing certain meat inspection stamps and meat inspection labels, or a marking device for inspected meat. It is estimated that 6,000,000 meat inspection stamps, of two kinds, will be required, and 65,000,000 labels, or the necessary number of another suitable device for marking inspected meat. Proposal sheets, specifications and samples may be obtained by addressing the Chief of the Bureau of Animal Industry, Washington, D. C. Bids will be received upon all or any one of the enumerated items.

JAMES WILSON, Secretary of Agriculture.

LET US BE YOUR FACTORY

WRITE FOR ESTIMATE ON ANY ARTICLE YOU WANT MANUFACTURED

STAMPINGS, MODELS, EXPER. WORK

WRITE FOR FREE BOOKLET

THE GLOBE MACHINE & STAMPING CO.
970 Hamilton St., Cleveland, O.

ICE MACHINES Corliss Engines, Brewers and Bottlers Machinery. THE VILTER MFG. CO. 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. E. V. BAILLARD. 24 Frankfort Street, New York.

RUBBER Expert Manufacturers Fine Jobbing Work

PARKER, STEARNS & CO., 228-229 South Street, New York

STEEL TYPEWRITER TYPE

We make, or will furnish complete outfit for making, all styles. **NEW YORK STENCIL WORKS, 100 Nassau Street, New York.**

DRYING MACHINES. S. E. WORRELL Hannibal, Mo.

WORKING and PATENT DRAWINGS. G. M. MAYER, M.E., 1131 Monadnock Bl., Chicago, Ill.

THE SCHWERDTLE STAMP CO. STEEL STAMPS, LETTERS & FIGURES. BRIDGEPORT CONN.

THE NATIONAL MODEL WORKS. Experimental Work, Models, Patterns, and Light Manufacturing. 85-87 Fifth Avenue, Chicago.

MODELS AND EXPERIMENTAL WORK. Mechanical and Electrical Devices. Small Machinery. J. LENZ, 310 Hudson Street, New York.

Electric Supplies, Telephones, Novelties, Dynamos, motors, fans, batteries, lamps, bells, belts, books, toys. Big catalog 4c. *Undersell all.* Want agents. **OHIO ELECTRIC WORKS, Cleveland, Ohio**

Experimental & Model Work

Cir. & advice free. Wm. Gardam & Son, 45-51 Rose St, N. Y

NOVELTIES & PATENTED ARTICLES

MANUFACTURED BY CONTRACT. PUNCHING DIES. SPECIAL MACHINERY.

E. KONIGSLOW STAMPING & TOOL WORKS, CLEVELAND, O.

W. B. KNIGHT MACHINERY CO.

Mfrs. of **Special Machinery and Tools**

2019 to 2025 Lucas Ave., ST. LOUIS

MASON'S NEW PAT. WHIP HOIST

for Outrigger hoists. Faster than Elevators, and hoists direct from teams. Saves handling at less expense.

Manfd. by VOLNEY W. MASON & CO., Inc.
Providence, R. I., U. S. A.

TELESCOPES SEND FOR CATALOGUE
W. & D. MOGEY.
BAYONNE CITY, N. J.

INVENTORS We manufacture METAL SPECIALTIES of all kinds, to order; largest equipment; lowest prices. Send sample or model for low estimate and best expert advice **FREE**
THE EAGLE TOOL CO., Dept. A, Cincinnati, O.

ANGLE BENDERS

Give up the old expensive vise method and use our quick and powerful hand power benders. Form angles in stock up to 1½ inch. Write to-day for catalogue.

Wallace Supply Co., 921 Garden City Block, Chicago, Ill.

Are you interested in Patents, Model or Experimental work? Our booklet entitled

WHAT WE DO—HOW WE DO IT

will be sent to you on request.

KNICKERBOCKER MACHINE WORKS, Inc.,
8-10-12 Jones Street, New York.

PUBLISHERS' ANNOUNCEMENT

Completion of the Greatest Literary Undertaking Ever Attempted in America

THE AMERICANA

The Most Magnificent, Scholarly, Original, Practical Work of Reference in Existence

Absolutely Without an Equal in the English-Speaking World

EDITORIAL STAFF

Editor-in-Chief
FREDERICK CONVERSE BEACH
Editor of the Scientific American

Managing Editor
GEORGE EDWIN RINES

Associate and Advisory Editors

SIMON NEWCOMB, Ph.D., LL.D.
J. E. CREIGHTON, A.B., Ph.D.
R. S. WOODWARD, Ph.D., LL.D.
DAVID STARR JORDAN, Ph.D., LL.D.
CASSIUS J. KEYSER, M.A., Ph.D.
ANDREW S. DRAPER, LL.D.
RUSSELL STURGIS, Ph.D., F.A.I.A.
EDWARD EVERETT HALE, S.T.D.
ANDREW C. McLAUGHLIN, A.M.
SYLVESTER BURNHAM, D.D.
REV. P. A. HALPIN
SMITH ELY JELLIFFE, Ph.D., M.D.
WM. MAVER, JR., C.E.
A. D. RISTEEN, Ph.D.
GEORGE L. ENGLISH, A.A.A.S.

For Canada
GEORGE M. WRONG, M.A.
C. W. COLBY, M.A., Ph.D.

Some Facts Concerning
The Americana

The **latest** in publication and the most modern in treatment.
Universal in its information.
Entirely new—not a revision.
The most complete and practical Encyclopedia ever produced in any country.
Has over 1,000 eminent contributors—the greatest number of scholars and authorities ever engaged upon a similar work.
Leading articles are written by recognized authorities and signed with the author's name and designation.
The work has been prepared to meet the universal needs of the American people, and its articles, while thoroughly scientific and scholarly, are written in a clear, concise and entertaining style, intended to furnish reliable information in the briefest possible space.

ESTABLISHED 18
SCIENTIFIC AMERICAN
INCORPORATED 1896.
MUNN & CO.

361 Broadway New York,

May, 1906.

To the American People:

We desire to call attention to the completion of the new Americana, issued under the direct editorship and personal supervision of Mr. Frederick Converse Beach, Editor of the Scientific American, assisted by a Board of eminent Department Editors and by more than one thousand contributors--leading scholars and authorities in the United States, Canada and South America.

This great work, published by the Scientific American Compiling Department, with our full co-operation, we are certain will be found standard in its information and fully equal to the reputation of the Scientific American for accuracy and reliability.

Munn & Co.

Expert Authorities

THE AMERICANA is the work of a thoroughly organized body of skilled experts, each selected for his special fitness and intimate knowledge of the subject assigned to him. These trained and progressive workers have struck out into *new paths;* they have proceeded upon *an entirely new plan* and that plan embodies the idea which has advanced our country to the front rank among the nations—the idea of *reaching the core of things by the shortest method.* This is the *American Plan.* You'll catch the spirit of it as you turn the pages of the work and note its conciseness yet comprehensiveness, while the names of the eminent writers of the signed articles are an ample assurance of accuracy and authoritativeness.

"I am delighted with the Americana. It seems to me to be superior to any encyclopedia which I possess. It is thoroughly up-to-date, modern and reliable." W. J. HOLLAND, Director Carnegie Museum, Pittsburgh.

16 Volumes, Illustrated

"I consider it in every respect the best encyclopedia published." P. N. JOHNSTON, Reference Librarian, New York Public Library.

AMERICA'S NATIONAL SYSTEM OF REFERENCE

Free on Request No mere advertisement can convey an adequate idea of the vast interest and immense utility of the AMERICANA, or of its exceptional value and sumptuous appearance. Let us send you, therefore, a handsome *120-page book* containing *specimen pages, maps, full-page plates, duo-tones, color plates,* and *text illustrations,* with *portraits of celebrities,* full-page photographic plates *of the most interesting and up-to-date subjects—The Americana being the best illustrated of all reference works.* With the object of making the Americana quickly and widely known, before placing the work in the hands of dealers for general distribution, we will accept orders direct at a large reduction from the regular price. Those interested are requested to make application immediately. **Send in at Once**

The work is sold exclusively in connection with the Scientific American, and cannot otherwise be obtained.

REQUEST BLANK

Scientific American Compiling Department
258 Fifth Avenue, New York City

Without obligating myself to purchase I would like to receive FREE, your 120 page Book of Specimen Pages, Maps, Duo-tones, Color Plates, Portraits, etc., of the NEW AMERICANA, with particulars of your special price to introductory subscribers.

Name .....
Occupation .....
Street .....
Town and State .....

CUT OUT AND MAIL TO-DAY

Scientific American Compiling Department

258-260 FIFTH AVENUE, NEW YORK

New York Belting and Packing Co.

LIMITED

Manufacturers of High Grade

Rubber Belting

Diaphragms, Dredging Sleeves, Emery Wheels; Air Brake, Steam, Suction and Garden Hose, etc., Mats, Matting, Interlocking Rubber Tiling. Also manufacturers of moulded and special rubber goods of every description.

Write for catalogue.

91-93 Chambers St., New York



CHARTER

Stationaries, Portables, Hoisters, Pumpers, Sawing and Boat Outfits, Combined with Dynamos.

Gasoline, Gas, Kerosene.

Send for Catalogue

State Power Needs.

CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

What Is Daus' Tip-Top?

TO PROVE that Daus' "Tip Top" is the best and simplest device for making **100 copies** from pen-written and **50 copies** from typewritten original, we will ship complete duplicator, cap size, **without deposit,** on ten (10) days' trial. **Price $7.50 less trade discount of 33⅓ per cent. or $5 Net**

The Felix A. B. Daus Duplicator Co., Daus Bldg., 111 John St., New York

---

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

CRUDE ASBESTOS

DIRECT FROM MINES

PREPARED ASBESTOS FIBRE for Manufacturers use

R. H. MARTIN, OFFICE, ST. PAUL BUILDING 220 B'way, New York.

Bausch & Lomb

Lanterns

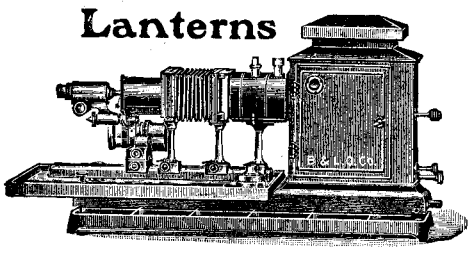

For every class of projection where accuracy and optical efficiency are required. Catalog free.

Bausch & Lomb Optical Co.
Rochester, N. Y.



LUFKIN

TAPES AND RULES ARE THE BEST.

For sale everywhere. Send for Catalog No. 16.

LUFKIN RULE CO.
Saginaw, Mich., U. S. A.
New York and London.

NAIL HOLDER AND SET

THE Nail can be driven where the hand cannot reach. Don't pound your fingers. **35 cents** buys it all. Order to-day. Catalogue No. 17 B of Fine Tools free.

THE L. S. STARRETT CO., - - Athol, Mass.

The Way to Get Out of a Hole Is Not to Get into It

In measuring with this Combination Triple-beam Roller Gauge you can't make a mistake. A convenience, a labor-saver for single, double or triple measurements. Polished and nickel-plated. $1.25, postpaid. *Catalogue free.*

GOODELL-PRATT COMPANY Greenfield, Mass.

"JUICE" TO BURN.

Your storage batteries will always be full and in a healthy condition if you have an **Apple Battery Charger** on your auto, boat or engine. Furnishes a strong, steady current that insures fat, hot sparks. Write for full information to-day.

The Dayton Electrical Mfg. Co.
98 St. Clair St., Dayton, O.

PATTON'S IRONHIDE

THE great rust-resisting coating for structural iron and steel work, gas tanks, elevators, steel cars, bridges — anything metal exposed to corroding influences.

IRONHIDE

is impervious to the action of sulphureted hydrogen and all deleterious gases. It possesses impermeability, durability, elasticity, toughness, fineness and smoothness. It covers 25 per cent more surface than red lead and is more durable. Ready to use. Write for descriptive circulars, etc.

PATTON PAINT CO.
227 Lake Street Milwaukee, Wis.

STEAM USERS

Rainbow Packing

The original and only genuine red sheet packing.

The only effective and most economical flange packing in existence.

Can't blow Rainbow out.

For steam, air, hot or cold water, acid and ammonia joints.

Beware of imitations.

Look for the trade mark—the word Rainbow in a diamond in black, three rows of which extend the full length of each roll.

Manufactured exclusively by

PEERLESS RUBBER MFG. CO.
16 Warren St., New York

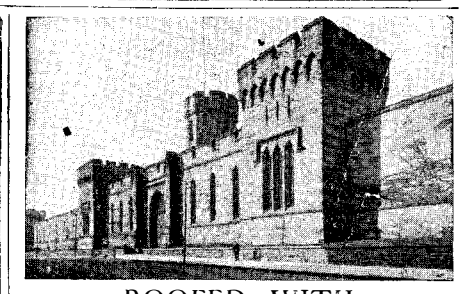

ROOFED WITH "TAYLOR OLD STYLE" TIN

"Taylor Old Style" tin is serving what is in all probability be a life sentence on the roofs of many of the Pennsylvania State penitentiary buildings. On the older buildings it has been giving good service for over twenty-five years and subsequent roofing needs have invariably been taken care of with "Taylor Old Style" tin.

In securing a fitting roof for substantial and enduring structures no better selection could have been made.

Our booklet **"A Guide to Good Roofs"** will help you decide what kind of a roof is best for you.

N. & G. TAYLOR COMPANY
ESTABLISHED 1810
Philadelphia

PENNSYLVANIA CLINCHER-NEW RACING TYPE

This new flat tread tire, giving a uniform bearing surface of three inches, is the same type that has long been established abroad as the best for racing and long distance touring

Non-Skidding Without Studs

PENNSYLVANIA RUBBER COMPANY
JEANNETTE, PA.

NEW YORK:	1665	Broadway.
PHILADELPHIA:	615 N.	Broad Street.
BOSTON:	167	Oliver Street.
CHICAGO:	1241	Michigan Ave.
ATLANTA, GA.:	102	Prior Street.
LONDON:	4	Snow Hill.

YOUR OWN ELECTRIC LIGHT PLANT.

We have Standard Complete Outfits for any size place, summer homes, residences, launches, yachts etc. Every detail included; very best material money can buy; thoroughly practical; so simple no electrician required. **Light all the time** with our Storage Battery Outfits. **Gas, Gasoline, Kerosene** or **Steam** engines used give plenty of power for pumping water, sawing wood, refrigeration, etc.

For latest printed matter covering over a hundred outfits address ELECTRIC DEPARTMENT

RICHARDSON ENGINEERING CO. HARTFORD, CONN.



"STANDARD"

Two-Speed Automatic Coaster Brake Hub

Makes wheeling a delight, eliminates the drudgery. Do not waste money on experiments when you can buy a perfect attachment *all in* one hub. Our little booklet tells all about it and is mailed free. Write to-day.

THE STANDARD COMPANY - - - - Torrington, Conn.

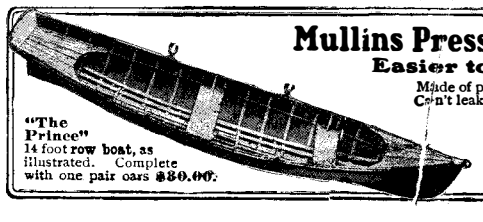

"The Prince" 14 foot row boat, as illustrated. Complete with one pair oars **$30.00.**

Mullins Pressed Steel Boats Can't Sink

Easier to Row—Absolutely Safe

Made of pressed steel, with air chambers in each end like a life boat. Can't leak—crack—dry out or sink—last a lifetime. Every boat guaranteed. The ideal boat for families—summer resorts—parks—boat liveries, etc. Strong—Safe—speedy. Write today for our large catalog of **row boats, motor boats, hunting and fishing boats.**

The W. H. Mullins Co., 118 Franklin St., Salem, O.

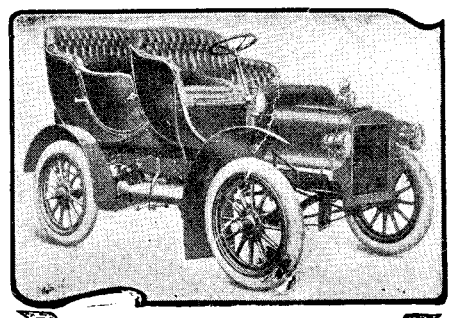

Model M Touring Car, $950, f. o. b. Detroit, (Lamps not included)

Motor Value

The Cadillac is undeniably the greatest automobile value ever offered—not alone in fairness of price, but in the satisfaction and everlasting service received for that price. In fact, there are few establishments, if any, sufficiently well equipped to produce cars the equal of the

CADILLAC

at an actual *factory cost* of less than our selling price. This is but one of the many benefits a Cadillac purchaser derives from the wonderful combination of equipment, skill and experience that backs up every car we build.

The Cadillac couldn't be better if you paid just twice the price. Your dealer will tell you why. His address—also our finely illustrated Booklet N—will be sent upon request.

Model K, 10 h. p. Runabout, $750
Model M, Light Touring Car, $950
Model H, 30 h. p. Touring Car, $2,500
All prices f. o. b. Detroit

Cadillac Motor Car Co.,
Detroit, Mich.
Member Asso. Licensed Auto Mfrs.

1½ h.p. engine only, $33.15
3 h.p. engine only, 44.00



DETROIT AUTO-MARINE Motor New Model 1906

The Smoothest Thing That Runs

Noise, Friction and Uncertainty reduced to a minimum.

The result of a high standard of manufacturing—which means every piece of metal tested—not by rule of thumb, but by scientific methods, on a testing machine built for the purpose.

From foundry to user, the DETROIT AUTO-MARINE MOTOR passes in its various stages under one organization head.

We are making **10,000 Auto-Marine Gasoline** engines this year, not merely assembling parts made in various factories.

WE MANUFACTURE THE MOTOR COMPLETE AND GUARANTEE EVERY MOTOR WE MAKE

1½ H. P., $33.15. Engine only
3 H. P. will develop 4 H. P., $44.00. Engine only

For stationary power purposes, we equip these engines with the Auto Adjustable Governor, at an addition of $5—making one of the most satisfactory gasoline engines for power purposes built.

Write for Catalog describing Auto-Marine Motors 1 to 20 H. P. and Auto Adjustable Governor.

DETROIT AUTO-MARINE CO.
75 E. Congress St., Detroit, Mich.

F. G. HALL, Mgr., 95 Liberty Street, New York
The Bourse, Philadelphia

The only builders of Auto-Marine Engines in the World

IT PAYS BIG To amuse the Public With Motion Pictures



NO EXPERIENCE NECESSARY as our instruction Book and "Business Guide" tells all. **We furnish Complete Outfits with Big Advertising Posters, etc.** Humorous dramas brimful of fun, travel, history, religion, temperance work and songs illustrated. One man can do it. **Astonishing Opportunity** in any locality for a man with a little money to show in churches, school houses, lodge halls, theatres, etc. **Big profits each entertainment.** Others do it, why not you? It's easy; write to us and we'll tell you how. **Catalogue free.**

AMUSEMENT SUPPLY CO. 467 Chemical Bank Bldg., CHICAGO

PARALLEL CHESLY & CLAMPS ALL ANGLES SIDES Chicago U.S.A.

15 to 21 South Clinton Street.